



5	PCDK 2.5 M3"-Screw	S000002580 (H)	2	Brass	Ni Plated
4	PC 2.5B M3"-Screw	S000001100 (H)	2	Brass	Ni Plated
3	PCDK 4-Current Carrier	6117B00010 (H)	1	Copper	SnCe Plated
2	PCDK 4-Brass Cage	X000001840 (H)	4	Brass	Ni Plated

Notes:

- Rated voltage/current:UL 300V/30A
VDE 630V/32A
- Operation temperatures:-40° C~+105° C
- Withstanding Voltage: AC3000V/1Min
- Insulation Resistance:5000MΩ /DC1000V
- Wire Range: 24~10AWG 0.2~4mm²
- Max. Torque Value:M3, 5. 1kgf. cm
- Undimensioned Tolerances:

Pitch range in mm		Nominal dimension range in mm						
	over 6	over 10		over 30	over 60	over 100	over 150	∩
to 6	to 10	to 24	to 30	to 60	to 100	to 150		∇
±0.10	±0.15	±0.25	±0.2	±0.3	±0.5	±0.7	±1.0	0.05/10

REVISION RECORD				
REV	ECD	DESCRIPTION	DRFT	DATE
△		增加VDE刻字及参数	WLM	07/21/08'
△		图面更新	WLM	11/03/08'
△		增加UL及参数刻字	Zengy	03/31/09'

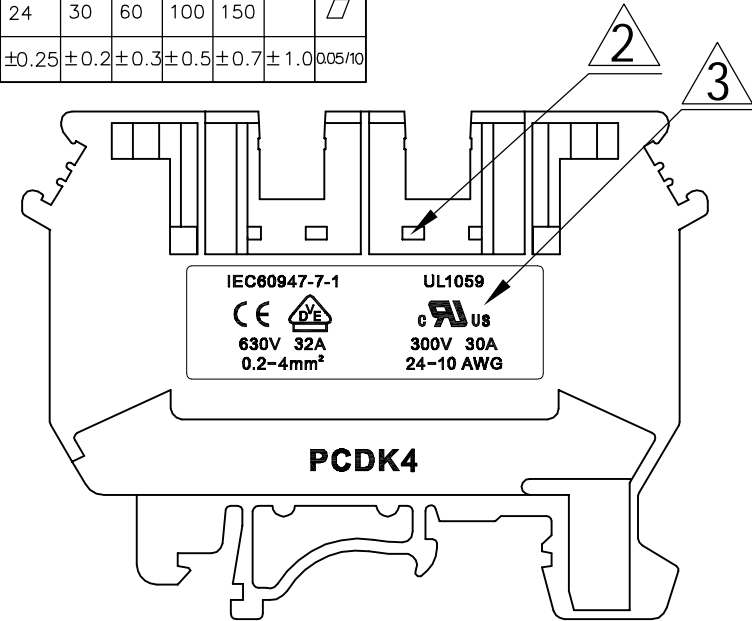

1	PCDK 4-Housing	6117A0Y01A (H)	1	PA66	UL94V-0
ITEM	NAME OF PART	NO. OF PART	Q'TY	MATERIAL	NOTES
DETACHED LISTS	← MM (INCH) →	DFTD ZYH	DATE 01/11/08'	宁波高正电子有限公司 DEGSON ELECTRONICS CO., LTD NAME PCDK4-01P-1Y-00A(H)	
	TOLERANCES EXCEPT AS NOTED	CHKD	DATE		
		MFD	DATE		
		APPVL	DATE		
		MATERIAL			
	ANGLES ± 1°	G.E		DRAWING NO. PCDK4-E01	SIZE A4
	THIRD ANGLE PROJECTION	FINISH:		/PART NO.	REV T3
		SCALE :		DO NOT SCALE DRAWING	03/31/09'
				SHEET 1	OF 1