



REVISION RECORD				
REV	ECD	DESCRIPTION	DRFT	DATE
△	10-0144	增加UL刻字	COCO	05/27/10'

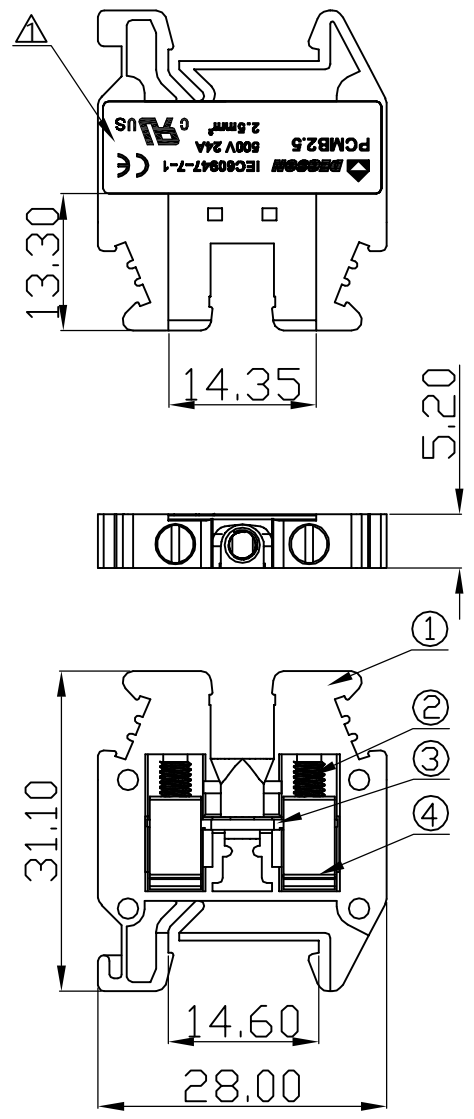

Notes:

- Rated voltage/current:UL 300V/20A
IEC 500V/24A
- Operation temperatures:-40°C~+105°C
- Withstanding Voltage:AC2500V/1Min
- Insulation Resistance:5000MΩ /DC1000V
- Wire Range:28~12AWG, 2.5mm²
- Max. Torque Value:M3, 5.0kgf. cm
- Undimensioned Tolerances:

Pitch range in mm		Nominal dimension range in mm					—	
	over 6	over 10		over 30	over 60	over 100	over 150	∩
to 6	to 10	to 24	to 30	to 60	to 100	to 150		∇
±0.10	±0.15	±0.25	±0.2	±0.3	±0.5	±0.7	±1.0	0.05/10

4	PC2.5-Brass Cage	X000000880(H)	2	Brass	Ni Plated
3	PCMB2.5 Current Carrier	6074B00010(H)	1	Copper	SnCe Plated
2	PC2.5B M3"-Screw	S000001100(H)	2	Brass	Ni Plated

ITEM	NAME OF PART	NO. OF PART	Q'TY	MATERIAL	NOTES
1	PCMB2.5-Housing	6074A0Y01A(H)	1	PA66	UL94V-0
TOLERANCES EXCEPT AS NOTED		DFTD ZYH	DATE 08/03/08'	宁波高正电子有限公司 DEGSON ELECTRONICS CO., LTD NAME PCMB2.5-01P-1Y-00A(H)	
MM (INCH)		CHKD	DATE		
.0 ±		MFD	DATE		
.00 ±		APPVL	DATE		
.000 ±		MATERIAL :		DRAWING NO. PCMB2.5-E01	
ANGLES ± 1°		G.E :		/PART NO.	
THIRD ANGLE PROJECTION		FINISH:		SCALE : 1:1	
DO NOT SCALE DRAWING				SHEET 1	OF 1