


TIELEE®



ISO9001 ISO14001
IATF16949 ISO45001

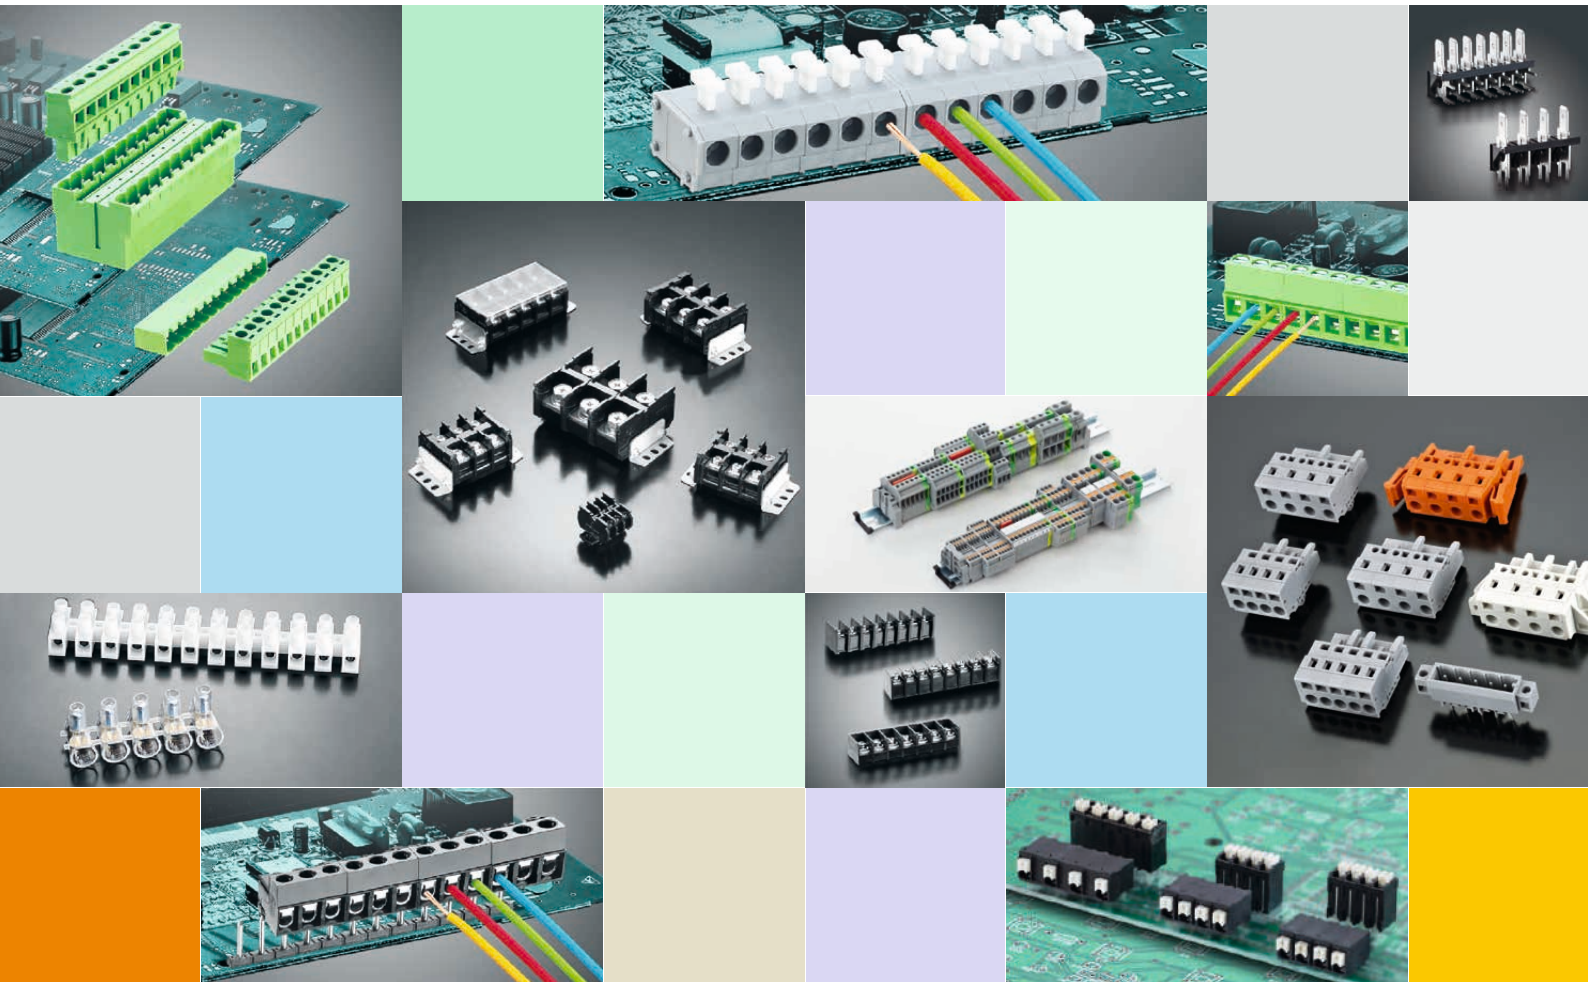

REACH



TERMINAL BLOCKS



TC-25.08
Brochure-001



企业简介 Company profile

天立电机（宁波）有限公司成立于 1998 年，是亚洲领先的接线端子和金属零件制造商之一，为安防系统、工业自动化、电力、照明、电信、电源、轨道交通、新能源等行业的客户提供高质量的产品和服务。总部及生产基地位于宁波杭州湾新区，距上海仅 2 小时车程。货物运输和客户来访都相当便利。

天立已获得 ISO9001，ISO14001，IATF16949 和 ISO45001 管理系统认证，并拥有 UL 和 VDE 授权实验室。产品符合 RoHS 和 REACH 并获得了 ，，，，， 等认证。


为了保持进步赢得客户的青睐，天立对 CAD 设计，模具开发设备，产品注塑冲设备和员工技能培训有很大的投入。经过多年的努力，天立的销售网络涵盖全世界，并将不断为客户提供高质量的产品和专业服务，共创繁荣。

Founded in 1998, Tianli Electrical Machinery (Ningbo) Co., Ltd. is one of the leading manufacturers of terminal blocks and metal parts in Asia, providing high quality products and service to customers of security system, industrial automation, electric power, lighting, telecommunication, power supply, rail transportation, new energy and so on. The headquarter and facility is located in Hangzhou Bay New Zone, Ningbo, only 2 hours to Shanghai. The transportation is very convenient here for goods shipment & customer visiting.

Tianli has been granted ISO9001, ISO14001, IATF16949 and ISO45001 management system certifications and own the UL and VDE authorized laboratory. The products are approved by ，，，，，，RoHS and REACH.

To keep advancement and win the favor of customers, Tianli made large investment in CAD design, mould development equipments, injection/stamping machines and staff skills training. With years of efforts, Tianli’ s sales network covers the whole world, and will continuously supply customers with high quality products and professional service, reaching the achievement of win-win prosperity.

04-09	TLPS SERIES - Plug(Female) for Pluggable Terminal Block
09-17	TLPH SERIES - Header(Male) for Pluggable Terminal Block
17-19	TLC SERIES - Spring-cage Clamp Terminal Block
20-22	TL SERIES - Wire Protector PCB Screw Terminal Block
22-26	TL SERIES - Raising Clamp PCB Screw Terminal Block
27-32	TLM SERIES - PCB Spring Terminal Block
32-34	TLB SERIES - Terminal Strip
34	TPK SERIES - Panel Feed-through Terminal Block
35	TLF SERIES - Fuse Terminal Block
35	FH SERIES - Fuse Holder
35	Interface Module
36	TQQ & TQS SERIES - PCB Fast Connector
37-41	B & T SERIES - Barrier Terminal Block
41-43	TB SERIES - Moldular and Rail-Mounted Terminal Block
43	TRM SERIES - Bolt Type Guide Rail Terminal Block
44-53	TS & TK SERIES - Din Rail Terminal Block
54	Metal Parts
55	Customized Products

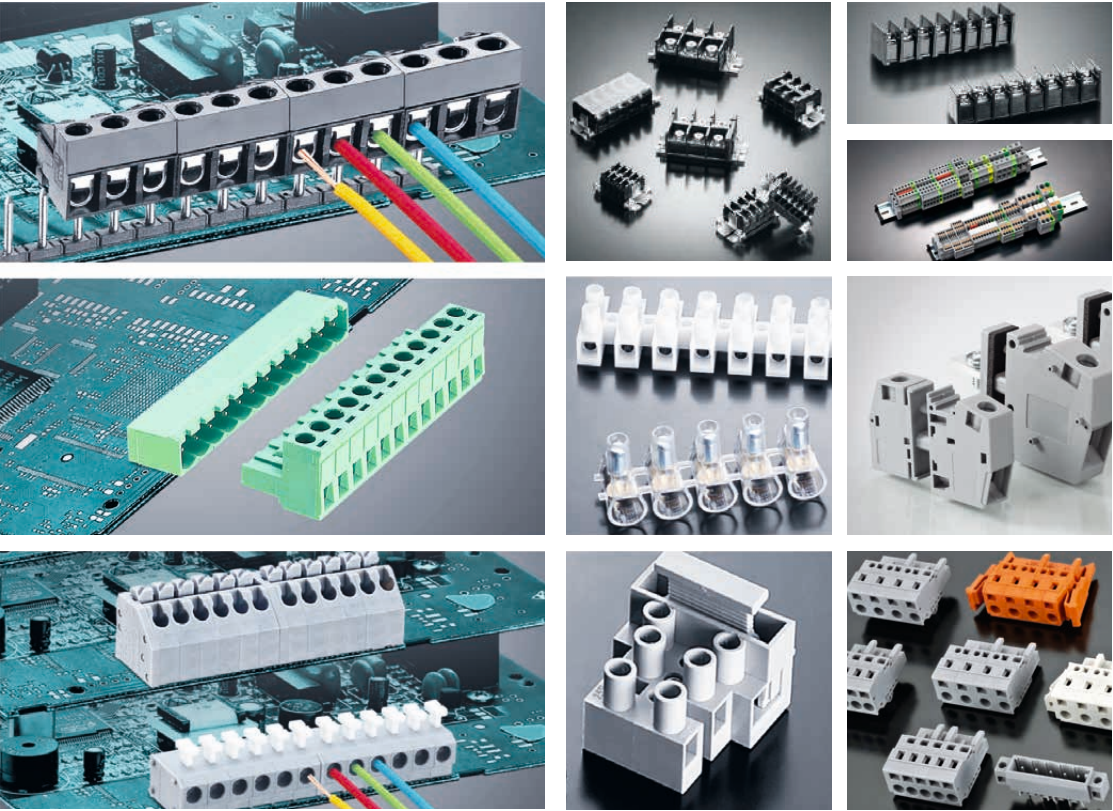



Pitch (间距):	5.00mm(5.08mm)
Approval (认证):	
Rated voltage (电压):	300V 630V
Rated current (电流):	16A 20A
Pole number (位数):	02~24P



Pitch (间距):	5.00mm(5.08mm)
Approval (认证):	
Rated voltage (电压):	300V 630V
Rated current (电流):	16A 20A
Pole number (位数):	02~24P



Pitch (间距):	5.00mm(5.08mm)
Approval (认证):	
Rated voltage (电压):	300V 630V
Rated current (电流):	16A 20A
Pole number (位数):	02~24P



Pitch (间距):	5.00mm(5.08mm)



Pitch (间距):	5.08mm
Approval (认证):	VDE(Applying)
Rated voltage (电压):	300V 320V
Rated current (电流):	25A 24A
Wire range (线径):	28-12AWG 0.34-2.5mm ² 4mm ² Sol
Pole number (位数):	02-24P



Pitch (间距):	5.08mm
Approval (认证):	VDE(Applying)
Rated voltage (电压):	300V 320V
Rated current (电流):	25A 24A
Wire range (线径):	28-12AWG 0.34-2.5mm ² 4mm ² Sol
Pole number (位数):	04-50P



Pitch (间距):	5.08mm
Approval (认证):	VDE(Applying)
Rated voltage (电压):	300V 320V
Rated current (电流):	25A 24A
Wire range (线径):	28-12AWG 0.34-2.5mm ² 4mm ² Sol
Pole number (位数):	04-48P



Pitch (间距):



Pitch (间距):	7.50mm
Approval (认证):	
Rated voKage (电压):	600V 1000V
Rated current (电流):	38A 41A
Wire range (线径):	24-8AWG 0.2-6mm ² 10mm ² str
Pole number (位数):	02-12P



Pitch (间距):	10.00mm
Approval (认证):	
Rated voltage (电压):	600V(01P) 1000V(01P) 300V(≥ 02P) 320V(≥ 02P)
Rated current (电流):	72A 76A
Wire range (线径):	18-4AWG 0.75-25mm ²
Pole number (位数):	01-12P



Pitch (间距):	10.00mm
Approval (认证):	
Rated voKage (电压):	600V 1000V
Rated current (电流):	66A 76A
Wire range (线径):	18-4AWG 0.75-25mm ²
Pole number (位数):	02-12P

<

TLB SERIES - Terminal Strip




TLB-B001-02P

Pitch (间距):	15.00mm
Approval (认证):	UL(Applying) VDE(Applying)
Rated voltage (电压):	300V 320V
Rated current (电流):	16A 16A
Wire range (线径):	22-12AWG 0.5-4mm²
Pole number (位数):	2P




TLB-B001-04P

Pitch (间距):	15.00mm
Approval (认证):	UL(Applying) VDE(Applying)
Rated voltage (电压):	300V 320V
Rated current (电流):	16A 16A
Wire range (线径):	22-12AWG 0.5-4mm²
Pole number (位数):	4P



Pitch (间距):	15.00mm
Approval (认证):	UL(Applying) VDE(Applying)
Rated voltage (电压):	300V 320V
Rated current (电流):	16A 16A
Wire range (线径):	22-12AWG 0.5-4mm²
Pole number (位数):	6P



Pitch (间距):	15.00mm
Approval (认证):	UL(Applying) VDE(Applying)
Rated voltage (电压):	300V 320V
Rated current (电流):	16A 16A
Wire range (线径):	22-12AWG 0.5-4mm²
Pole number (位数):	8P

TPK SERIES - Panel Feed-through Terminal Block



TPK 4

Approval (认证):	UL US VDE(Applying)
Rated voltage (电压):	300V 500V
Rated current (电流):	30A 32A 41A (6mm² sol)
Wire range (线径):	30-10AWG 0.2-4mm² sol / str 6mm² sol



TPKV 4

Approval (认证):	UL US VDE(Applying)
Rated voltage (电压):	300V 500V
Rated current (电流):	30A 32A 41A (6mm² sol)
Wire range (线径):	30-10AWG 0.2-4mm² sol / str 6mm² sol



TPK 10

Approval (认证):	UL US VDE(Applying)
Rated voltage (电压):	300V 500V
Rated current (电流):	65A 57A 76A (16mm² sol)
Wire range (线径):	20-6AWG 0.5-10mm² sol / str 16mm² sol



TPK 10-VP

Approval (认证):	UL US VDE(Applying)
Rated voltage (电压):	300V 500V
Rated current (电流):	65A 57A 76A (16mm² sol)
Wire range (线径):	20-6AWG 0.5-10mm² sol / str 16mm² sol



TPKV 10

Approval (认证):	UL US VDE(Applying)
Rated voltage (电压):	300V 500V
Rated current (电流):	65A 57A 76A (16mm² sol)
Wire range (线径):	20-6AWG 0.5-10mm² sol / str 16mm² sol



TPKV 10-VP

Approval (认证):	UL US VDE(Applying)
Rated voltage (电压):	300V 500V
Rated current (电流):	65A 57A 76A (16mm² sol)
Wire range (线径):	20-6AWG 0.5-10mm² sol / str 16mm² sol



TPK 16

Approval (认证):	UL US VDE(Applying)
Rated voltage (电压):	600V 800V
Rated current (电流):	85A 76A 101A (25mm² sol)
Wire range (线径):	20-4AWG 0.5-16mm² sol / str 25mm² sol



TPK 16-VP

Approval (认证):	UL US VDE(Applying)
Rated voltage (电压):	600V 500V
Rated current (电流):	85A 76A 101A (25mm² sol)
Wire range (线径):	20-4AWG 0.5-16mm² sol / str 25mm² sol



TPKV 16

Approval (认证):	UL US VDE(Applying)
Rated voltage (电压):	600V 800V
Rated current (电流):	85A 76A 101A (25mm² sol)
Wire range (线径):	20-4AWG 0.5-16mm² sol / str 25mm² sol



TPKV 16-VP

Approval (认证):	UL US VDE(Applying)
Rated voltage (电压):	600V 500V
Rated current (电流):	85A 76A 101A (25mm² sol)
Wire range (线径):	20-4AWG 0.5-16mm² sol / str 25mm² sol



TPK 25

Approval (认证):	UL US VDE(Applying)
Rated voltage (电压):	600V 800V
Rated current (电流):	115A 101A 125A (35mm² sol)
Wire range (线径):	10-2AWG 6-25mm² sol / str 35mm² sol



TPK 25-VP

Approval (认证):	UL US VDE(Applying)
Rated voltage (电压):	600V 500V
Rated current (电流):	115A 101A 125A (35mm² sol)
Wire range (线径):	10-2AWG 6-25mm² sol / str 35mm² sol




TPKV 25

Approval (认证):	UL US VDE(Applying)
Rated voltage (电压):	600V 800V
Rated current (电流):	115A 101A 125A (35mm² sol)
Wire range (线径):	10-2AWG 6-25mm² sol / str 35mm² sol




TPKV 25-VP

Approval (认证):	UL US VDE(Applying)
Rated voltage (电压):	600V 500V
Rated current (电流):	115A 101A 125A (35mm² sol)
Wire range (线径):	10-2AWG 6-25mm² sol / str 35mm² sol



Approval (认证):	UL US VDE(Applying)
Rated voltage (电压):	600V 800V
Rated current (电流):	115A 101A 125A (35mm² sol)
Wire range (线径):	10-2AWG 6-25mm² sol / str 35mm² sol



Approval (认证):	UL US VDE(Applying)
Rated voltage (电压):	600V 500V
Rated current (电流):	115A 101A 125A (35mm² sol)
Wire range (线径):	10-2AWG 6-25mm² sol / str 35mm² sol

TLF SERIES - Fuse Terminal Block




TLF-100-01P

Approval (认证):	UL US Fuse
Rated voltage (电压):	300V 250V
Rated current (电流):	13A 6.3A
Wire range (线径):	20-14AWG 0.5-2.5mm²
Pole number (位数):	01P




TLF-100(TLF-100E/TLF-100W/TLF-100S/TLF-100EW/TLF-100SW)

Approval (认证):	UL US Terminal block	UL US Fuse
Rated voltage (电压):	300V 450V	300V 250V
Rated current (电流):	30A 20A(with W) 24A	13A 6.3A
Wire range (线径):	18-10AWG 18-12AWG(with W) 0.5-2.5mm²	20-14AWG 0.5-2.5mm²
Pole number (位数):	02-06P	



TLF-100-01P+TLF-100-01P

Approval (认证):	UL US Fuse
Rated voltage (电压):	300V 250V
Rated current (电流):	13A 6.3A
Wire range (线径):	20-14AWG 0.5-2.5mm²
Pole number (位数):	01P+01P

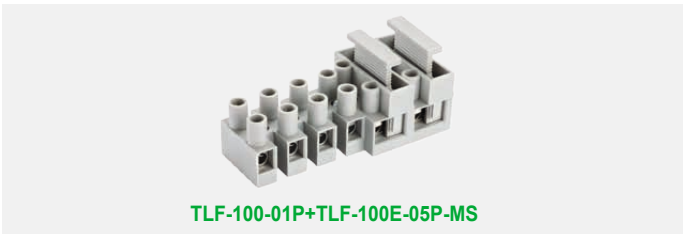

TLF-100-01P+TLF-100E-05P-MS

Pitch (间距):	10.00mm			
Approval (认证):	UL	Terminal block	UL	Fuse
Rated voltage (电压):	300V	450V	300V	250V
Rated current (电流):	30A	24A	13A	6.3A
Wire range (线径):	18-10AWG	0.5-2.5mm ²	20-14AWG	0.5-2.5mm ²
Pole number (位数):	02-06P			

FH SERIES - Fuse Holder



FH-278-A

Fuse link (保险丝):	Φ5.0*20
Approval (认证):	UL US
Rated voltage (电压):	250V 250V
Rated current (电流):	10A 6.3A
Rated Power (功率):	1.6W



FH-278-NA

Fuse link (保险丝):	Φ5.0*20
Approval (认证):	UL(Applying) VDE(Applying)
Rated voltage (电压):	250V 250V
Rated current (电流):	10A 6.3A
Rated Power (功率):	1.6W



FH-145-A

Fuse link (保险丝):	Φ5.0*20
Approval (认证):	UL US
Rated voltage (电压):	250V 250V
Rated current (电流):	10A 10A
Rated Power (功率):	2.5W



FH-150-A

Fuse link (保险丝):	Φ5.0*20
Approval (认证):	UL US
Rated voltage (电压):	250V 250V
Rated current (电流):	10A 10A
Rated Power (功率):	2.5W

Interface Module



PCBM-72

Applicable PCB width(适用PCB宽度):	72mm
--------------------------------	------



PCBM-108

Applicable PCB width(适用PCB宽度):	108mm
--------------------------------	-------



Pitch (间距):	25.00mm
Approval (认证):	
Rated voltage (电压):	600V
Rated current (电流):	150A
Wire range (线径):	8-1/0AWG
Screw(螺丝):	M8
Pole number (位数):	02-12P



Pitch (间距):	25.00mm
Approval (认证):	
Rated voltage (电压):	600V
Rated current (电流):	150A
Wire range (线径):	8-1/0AWG
Screw(螺丝):	M8
Pole number (位数):	02-12P



Pitch (间距):	27.00mm
Approval (认证):	
Rated voltage (电压):	600V
Rated current (电流):	230A
Wire range (线径):	8-4/0AWG
Screw(螺丝):	M8
Pole number (位数):	02-12P



Pitch (间距):	33.00mm
Approval (认证):	
Rated voltage (电压):	600V
Rated current (电流):	230A
Wire range (线径):	8-4/0AWG
Screw(螺丝):	M10
Pole number (位数):	02-12P



间距 Pitch	45.00mm
认证 Approval	
电压 Rated Voltage	600V
电流 Rated Current	380A
线径 Applicable wire	6-3/0AWG
螺丝 Screw	M10
Pole number (位数):	02-12P



Pitch (间距):	60mm
Approval (认证):	
Rated voltage (电压):	1000V
Rated current (电流):	475/620A
Wire range (线径):	350-250 Kcmil
Screw(螺丝):	M16
Pole number (位数):	02-12P



Pitch (间距):	8.50mm
Approval (认证):	
Rated voltage (电压):	300V
Rated current (电流):	10A
Wire range (线径):	1.5mm ²
Screw(螺丝):	M3
Pole number (位数):	02-20P



Pitch (间距):	10.00mm
Approval (认证):	
Rated voltage (电压):	300V
Rated current (电流):	20A
Wire range (线径):	2.5mm ²
Screw(螺丝):	M3.5
Pole number (位数):	02-12P



Pitch (间距):	12.00mm
Approval (认证):	
Rated voltage (电压):	300V
Rated current (电流):	30A
Wire range (线径):	4.0mm ²
Screw(螺丝):	M3.5
Pole number (位数):	02-12P



Pitch (间距):	8.80mm
Approval (认证):	
Rated voltage (电压):	600V 600V
Rated current (电流):	15A
Wire range (线径):	22-14AWG 1.5mm ²
Screw(螺丝):	M3
Pole number (位数):	02-12P



Pitch (间距):	10.50mm
Approval (认证):	
Rated voltage (电压):	600V 600V
Rated current (电流):	20A
Wire range (线径):	22-12AWG 4.0mm ²
Screw(螺丝):	M3.5
Pole number (位数):	02-30P



Pitch (间距):	13.00mm
Approval (认证):	
Rated voltage (电压):	600V 600V
Rated current (电流):	30A
Wire range (线径):	22-10AWG 6.0mm ²
Screw(螺丝):	M4
Pole number (位数):	02-12P



Pitch (间距):	19.00mm
Approval (认证):	
Rated voltage (电压):	600V 600V
Rated current (电流):	65A
Wire range (线径):	18-6AWG 16mm ²
Screw(螺丝):	M6
Pole number (位数):	02-12P



Pitch (间距):	19.00mm
Approval (认证):	
Rated voltage (电压):	600V
Rated current (电流):	65A
Wire range (线径):	18-6AWG
Screw(螺丝):	M6
Pole number (位数):	02-12P



Pitch (间距):	19.00mm
Approval (认证):	
Rated voltage (电压):	600V 600V
Rated current (电流):	85A
Wire range (线径):	18-4AWG 25mm ²
Screw(螺丝):	M6
Pole number (位数):	02-12P



Pitch (间距):	19.00mm
Approval (认证):	
Rated voltage (电压):	600V
Rated current (电流):	85A
Wire range (线径):	18-4AWG
Screw(螺丝):	M6
Pole number (位数):	02-12P



Pitch (间距):	25.00mm
Approval (认证):	
Rated voltage (电压):	600V
Rated current (电流):	150A
Wire range (线径):	8-1/0AWG
Screw(螺丝):	M8
Pole number (位数):	02-12P



Pitch (间距):	25.00mm
Approval (认证):	
Rated voltage (电压):	600V
Rated current (电流):	150A
Wire range (线径):	8-1/0AWG
Screw(螺丝):	M8
Pole number (位数):	02-12P



Pitch (间距):	27.00mm
Approval (认证):	
Rated voltage (电压):	600V
Rated current (电流):	230A
Wire range (线径):	8-4/0AWG
Screw(螺丝):	M8
Pole number (位数):	02-12P



Pitch (间距):	33.00mm
Approval (认证):	
Rated voltage (电压):	600V
Rated current (电流):	230A
Wire range (线径):	8-4/0AWG
Screw(螺丝):	M10
Pole number (位数):	02-12P



Pitch (间距):	45.00mm
Approval (认证):	
Rated voltage (电压):	600V
Rated current (电流):	380A
Wire range (线径):	6-3/0AWG
Screw(螺丝):	M10
Pole number (位数):	02-12P




Pitch (间距):	60.00mm
Approval (认证):	
Rated voltage (电压):	1000V
Rated current (电流):	620A
Wire range (线径):	350-250 Kcmil
Screw(螺丝):	M16
Pole number (位数):	02-12P




Pitch (间距):	8.80mm
Approval (认证):	
Rated voltage (电压):	600V
Rated current (电流):	15A
Wire range (线径):	22-14AWG
Screw(螺丝):	M3
Pole number (位数):	02-12P




Pitch (间距):	10.50mm
Approval (认证):	UL(Applying)
Rated voltage (电压):	600V
Rated current (电流):	20A
Wire range (线径):	22-12AWG
Screw(螺丝):	M3.5
Pole number (位数):	02-12P




Pitch (间距):	
Approval (认证):	
Rated voltage (电压):	
Rated current (电流):	
Wire range (线径):	
Screw(螺丝):	
Pole number (位数):	



Pitch (间距):	
Approval (认证):	
Rated voltage (电压):	
Rated current (电流):	
Wire range (线径):	
Screw(螺丝):	
Pole number (位数):	



Pitch (间距):	
Approval (认证):	
Rated voltage (电压):	
Rated current (电流):	
Wire range (线径):	
Screw(螺丝):	
Pole number (位数):	




Pitch (间距):	
Approval (认证):	
Rated voltage (电压):	
Rated current (电流):	
Wire range (线径):	
Screw(螺丝):	
Pole number (位数):	




Thickness (厚度):	29.0mm
Approval (认证):	UL(Applying) VDE(Applying)
Rated voltage (电压):	1500V 1500V
Rated current (电流):	175A 192A
Wire range (线径):	14-2/0AWG 2.5-70mm ²
Bolt (螺栓):	M8




Thickness (厚度):	29.0mm
Approval (认证):	UL(Applying) VDE(Applying)
Rated voltage (电压):	1500V 1500V
Rated current (电流):	175A 192A
Wire range (线径):	14-2/0AWG 2.5-70mm ²
Bolt (螺栓):	M8




Pitch (间距):	
Approval (认证):	
Rated voltage (电压):	
Rated current (电流):	
Wire range (线径):	
Screw(螺丝):	
Pole number (位数):	




Pitch (间距):	
Approval (认证):	
Rated voltage (电压):	
Rated current (电流):	
Wire range (线径):	
Screw(螺丝):	
Pole number (位数):	



Pitch (间距):	
Approval (认证):	
Rated voltage (电压):	
Rated current (电流):	
Wire range (线径):	
Screw(螺丝):	
Pole number (位数):	



Pitch (间距):	
Approval (认证):	
Rated voltage (电压):	
Rated current (电流):	
Wire range (线径):	
Screw(螺丝):	
Pole number (位数):	



TK6-TD

Thickness (厚度): 8.20mm

Approval (认证): UL(Applying) VDE(Applying)

Rated voltage (电压): 300V	800V
Rated current (电流): 45A	41A

Wire range (线径): 26-8AWG 0.5-6mm² 10mm² Sol

Scerw (螺丝): M4



TK10

Thickness (厚度): 10.20mm

Approval (认证):

Rated voltage (电压): 600V	1000V
Rated current (电流): 65A	57A

Wire range (线径): 26-6AWG 0.5-10mm² 16mm² Sol

Scerw (螺丝): M4



TK10-T


Thickness (厚度): 10.20mm

Approval (认证):

Rated voltage (电压): 600V	1000V
Rated current (电流): 65A	57A

Wire range (线径): 20-6AWG 0.5-10mm² 16mm² Sol

Scerw (螺丝): M4



TK16

Thickness (厚度): 12.20mm

Approval (认证):

Rated voltage (电压): 600V	1000V
Rated current (电流): 100A	76A

Wire range (线径): 16-3AWG 11.5-16mm² 25mm² (rigid)

Scerw (螺丝): M5



TK35

Thickness (厚度): 16.00mm

Approval (认证):

Rated voltage (电压): 600V	1000V
Rated current (电流): 150A	125A

Wire range (线径): 14-1/0AWG 1.5-35mm² 50mm² (rigid)

Scerw (螺丝): M6



TK2.5-PE

Thickness (厚度): 5.20mm

Approval (认证):

Rated voltage (电压): 600V	
Rated current (电流): 26-12AWG	0.2-2.5mm ² 4mm ² Sol

Wire range (线径): 26-12AWG

Scerw (螺丝): M3



TK2.5-T-PE


Thickness (厚度): 5.20mm

Approval (认证):

Rated voltage (电压): 600V	
Rated current (电流): 26-12AWG	0.2-2.5mm ² 4mm ² Sol

Wire range (线径): 26-12AWG

Scerw (螺丝): M2.5



TK4-PE

Thickness (厚度): 6.20mm

Approval (认证):

Rated voltage (电压): 600V	
Rated current (电流): 26-12AWG	0.2-4mm ² 6mm ² Sol

Wire range (线径): 26-12AWG

Scerw (螺丝): M3



TK4-T-PE


Thickness (厚度): 6.20mm

Approval (认证):

Rated voltage (电压): 600V	
Rated current (电流): 26-10AWG	0.2-4mm ² 6mm ² Sol

Wire range (线径): 26-10AWG

Scerw (螺丝): M3



TK6-PE


Thickness (厚度): 8.20mm

Approval (认证):

Rated voltage (电压): 600V	
Rated current (电流): 24-8AWG	0.2-6mm ² 10mm ² Sol

Wire range (线径): 24-8AWG

Scerw (螺丝): M4



TK6-T-PE

Thickness (厚度): 8.20mm

Approval (认证):

Rated voltage (电压): 600V	
Rated current (电流): 24-8AWG	0.2-6mm ² 10mm ² Sol

Wire range (线径): 24-8AWG

Scerw (螺丝): M4



TK10-PE


Thickness (厚度): 10.20mm

Approval (认证):

Rated voltage (电压): 600V	
Rated current (电流): 20-6AWG	0.5-10mm ² 16mm ² Sol

Wire range (线径): 20-6AWG

Scerw (螺丝): M4



TK10-T-PE

Thickness (厚度): 10.20mm

Approval (认证):

Rated voltage (电压): 600V	
Rated current (电流): 20-6AWG	0.5-10mm ² 16mm ² Sol

Wire range (线径): 20-6AWG

Scerw (螺丝): M4



TK16-PE


Thickness (厚度): 12.20mm

Approval (认证):

Rated voltage (电压): 600V	
Rated current (电流): 16-3AWG	1.5-16mm ² 25mm ² (rigid)

Wire range (线径): 16-3AWG

Scerw (螺丝): M5



TK35-PE

Thickness (厚度): 16.00mm

Approval (认证):

Rated voltage (电压): 600V	
Rated current (电流): 14-1/0AWG	1.5-35mm ² 50mm ² (rigid)

Wire range (线径): 14-1/0AWG

Scerw (螺丝): M6



TK2.5-TN


Thickness (厚度): 5.20mm

Approval (认证):

Rated voltage (电压): 600V	1000V
Rated current (电流): 20A	24A

Wire range (线径): 26-12AWG 0.2-2.5mm² 4mm² Sol

Scerw (螺丝): M3



TK4-TN

Thickness (厚度): 6.20mm

Approval (认证):

Rated voltage (电压): 600V	1000V
Rated current (电流): 30A	32A

Wire range (线径): 26-10AWG 0.2-4mm² 6mm² Sol

Scerw (螺丝): M3



TK6-TN

Thickness (厚度): 8.20mm

Approval (认证):

Rated voltage (电压): 600V	1000V
Rated current (电流): 50A	41A

Wire range (线径): 24-8AWG 0.2-6mm² 10mm² Sol

Scerw (螺丝): M4



TK10-TN

Thickness (厚度): 10.20mm

Approval (认证):

Rated voltage (电压): 600V	1000V
Rated current (电流): 65A	57A

Wire range (线径): 20-6AWG 0.5-10mm² 16mm² Sol

Scerw (螺丝): M4



TK2.5-TN-PE


Thickness (厚度): 5.20mm

Approval (认证):

Rated voltage (电压): 600V	
Rated current (电流): 26-12AWG	0.2-2.5mm ² 4mm ² Sol

Wire range (线径): 26-12AWG

Scerw (螺丝): M3



TK4-TN-PE

Thickness (厚度): 6.20mm

Approval (认证):

Rated voltage (电压): 600V	
Rated current (电流): 26-10AWG	0.2-4mm ² 6mm ² Sol

Wire range (线径): 26-10AWG

Scerw (螺丝): M3



TK6-TN-PE


Thickness (厚度): 8.20mm

Approval (认证):

Rated voltage (电压): 600V	
Rated current (电流): 24-8AWG	0.2-6mm ² 10mm ² Sol

Wire range (线径): 24-8AWG

Scerw (螺丝): M4



TK10-TN-PE


Thickness (厚度): 10.20mm

Approval (认证):

Rated voltage (电压): 600V	
Rated current (电流): 20-6AWG	0.5-10mm ² 16mm ² Sol

Wire range (线径): 20-6AWG

Scerw (螺丝): M4



TK2.5-QT

Thickness (厚度): 5.20mm

Approval (认证):

Rated voltage (电压): 600V	1000V
Rated current (电流): 20A	24A

Wire range (线径): 26-12AWG 0.2-2.5mm² 4mm² Sol

Scerw (螺丝): M3



TK4-QT


Thickness (厚度): 6.20mm

Approval (认证):

Rated voltage (电压): 600V	1000V
Rated current (电流): 30A	32A

Wire range (线径): 26-10AWG 0.2-4mm² 6mm² Sol

Scerw (螺丝): M3



TK2.5-QT-PE

Thickness (厚度): 5.20mm

Approval (认证):

Rated voltage (电压): 600V	
Rated current (电流): 26-12AWG	0.2-2.5mm ² 4mm ² Sol

Wire range (线径): 26-12AWG

Scerw (螺丝): M3



TK4-QT-PE

Thickness (厚度): 6.20mm

Approval (认证):

Rated voltage (电压): 600V	
Rated current (电流): 26-10AWG	0.2-4mm ² 6mm ² Sol

Wire range (线径): 26-10AWG

Scerw (螺丝): M3



TK2.5-2L

Thickness (厚度): 5.20mm

Approval (认证):

Rated voltage (电压): 600V	800V
Rated current (电流): 20A	24A/28A(4mm ²)

Wire range (线径): 26-12AWG 0.2-2.5mm² 4mm² Sol

Scerw (螺丝): M3



TK4-2L

Thickness (厚度): 6.20mm

Approval (认证):

Rated voltage (电压): 600V	1000V
Rated current (电流): 30A	32A

Wire range (线径): 26-10AWG 0.2-4mm² 6mm² Sol

Scerw (螺丝): M3



TK2.5-2L-PV

Thickness (厚度): 5.20mm

Approval (认证):

Rated voltage (电压): 600V	800V
Rated current (电流): 20A	24A/28A(4mm ²)

Wire range (线径): 26-12AWG 0.2-2.5mm² 4mm² Sol

Scerw (螺丝): M3



TK4-2L-PV


Thickness (厚度): 6.20mm

Approval (认证):

Rated voltage (电压): 600V	1000V
Rated current (电流): 30A	32A

Wire range (线径): 26-10AWG 0.2-4mm² 6mm² Sol

Scerw (螺丝): M3



TK4-M


Thickness (厚度): 6.20mm

Approval (认证): UL(Applying) VDE(Applying)

Rated voltage (电压): 300V	500V
Rated current (电流): 16A	20A

Wire range (线径): 26-10AWG 0.2-4mm² 6mm² Sol

Scerw (螺丝): M3



TK4-MT


Thickness (厚度): 6.20mm

Approval (认证): UL(Applying) VDE(Applying)

Rated voltage (电压): 300V	500V
Rated current (电流): 16A	20A

Wire range (线径): 26-10AWG 0.2-4mm² 6mm² Sol

Scerw (螺丝): M3



TK4-FU(5X20)


Thickness (厚度): 8.20mm


Approval (认证): UL(Applying) VDE(Applying)


Rated voltage (电压): 600V	800V
Rated current (电流): 6.3A	6.3A


Wire range (线径): 22-10AWG 0.2-2.5mm² 6mm² Sol

Scerw (螺丝): M3











Thickness (厚度): 5.20mm
Approval (认证): UL(Applying) VDE(Applying)
Rated voltage (电压): 300V 800V
Rated current (电流): 0.5A 0.5A
Wire range (线径): 26-12AWG 0.2-2.5mm² 4mm² Sol



Thickness (厚度): 5.20mm
Approval (认证): UL(Applying) VDE(Applying)
Rated voltage (电压): 300V 800V
Rated current (电流): 0.5A 0.5A
Wire range (线径): 26-12AWG 0.2-2.5mm² 4mm² Sol



Thickness (厚度): 5.20mm
Approval (认证): UL(Applying) VDE(Applying)
Rated voltage (电压): 300V 800V
Rated current (电流): 0.5A 0.5A
Wire range (线径): 26-12AWG 0.2-2.5mm² 4mm² Sol



Thickness (厚度): 5.20mm
Approval (认证): UL(Applying) VDE(Applying)
Rated voltage (电压): 300V 800V
Rated current (电流): 0.5A 0.5A
Wire range (线径): 26-12AWG 0.2-2.5mm² 4mm² Sol



Thickness (厚度): 5.20mm
Approval (认证): UL(Applying) VDE(Applying)
Rated voltage (电压): 300V 800V
Rated current (电流): 0.5A 0.5A
Wire range (线径): 26-12AWG 0.2-2.5mm² 4mm² Sol



Thickness (厚度): 5.20mm
Approval (认证): UL(Applying) VDE(Applying)
Rated voltage (电压): 300V 800V
Rated current (电流): 0.5A 0.5A
Wire range (线径): 26-12AWG 0.2-2.5mm² 4mm² Sol



Applicable product (适用产品)
TS1.5, TS1.5-PE



Applicable product (适用产品)
TS2.5, TS2.5-PE



Applicable product (适用产品)
TS4, TS4-PE



Applicable product (适用产品)
TS6, TS6-PE



Applicable product (适用产品)
TS10, TS10-PE



Applicable product (适用产品)
TS16, TS16-PE



Applicable product (适用产品)
TS1.5-TN, TS1.5-TN-PE



Applicable product (适用产品)
TS2.5-TN, TS2.5-TN-PE



Applicable product (适用产品)
TS4-TN, TS4-TN-PE



Applicable product (适用产品)
TS6-TN, TS6-TN-PE



Applicable product (适用产品)
TS10-TN, TS10-TN-PE



Applicable product (适用产品)
TS1.5-QT, TS1.5-QT-PE



Applicable product (适用产品)
TS2.5-QT, TS2.5-QT-PE



Applicable product (适用产品)
TS4-QT, TS4-QT-PE



Applicable product (适用产品)
TS6-QT, TS6-QT-PE



Applicable product (适用产品)
TS1.5-2L, TS1.5-2L-PE



Applicable product (适用产品)
TS2.5-2L, TS2.5-2L-PE



Applicable product (适用产品)
TS4-2L, TS4-2L-PE



Applicable product (适用产品)
TS2.5-M, TS2.5-MT



Applicable product (适用产品)
TS4-M, TS4-MT
TS4-FU(5x20)
TS4-FUL24(5x20)
TS4-FUL60(5x20)
TS4-FUL250(5x20)



Applicable product (适用产品)
TS2.5-TN-M, TS2.5-TN-MT



Applicable product (适用产品)
TS2.5-QT-M, TS2.5-QT-MT



Applicable product (适用产品)
TS2.5-2L-M, TS2.5-2L-MT



Applicable product (适用产品)
TK2.5, TK2.5-PE
TK4, TK4-PE
TK6, TK6-PE
TK10, TK10-PE



Applicable product (适用产品)
TK16, TK16-PE



Applicable product (适用产品)
TK2.5-T, TK2.5-T-PE
TK4-T, TK4-T-PE



Applicable product (适用产品)
TK6-T, TK6-T-PE



Applicable product (适用产品)
TK10-T, TK10-T-PE



Applicable product (适用产品)
TK2.5-TN, TK2.5-TN-PE
TK4-TN, TK4-TN-PE



Applicable product (适用产品)
TKC2.5-T-TN
TKC2.5-T-TN-PE
TK4-T-TN
TK4-T-TN-PE



Applicable product (适用产品)
TK6-TN, TK6-TN-PE
TK10-TN, TK10-TN-PE



Applicable product (适用产品)
TK2.5-QT, TK2.5-QT-PE
TK4-QT, TK4-QT-PE



Applicable product (适用产品)
TK2.5-2L, TK2.5-2L-PE
TK4-2L, TK4-2L-PE



Thickness (厚度): 8.00mm
Applicable Din Rail(适用的导轨)
TH35-7.5, TH35-15

TS & TK SERIES - Din Rail Terminal Block



ETNS02

Thickness (厚度): 8.00mm
Screw (螺丝): M3
Applicable Din Rail (适用的导轨): TH35-7.5, TH35-15



ETNS03

Thickness (厚度): 5.15mm
Applicable Din Rail(适用的导轨): TH35-7.5, TH35-15



TSMP-01

Applicable product (适用产品): TS2.5-M Series, TS2.5-2L-M Series
TS4-M Series, TS6-M Series



TSFB1.5

Pitch (间距): 3.50mm
Applicable product (适用产品): TS1.5 Series



TSFB6

Pitch (间距): 8.20mm
Applicable product (适用产品): TS6 Series



TSFB10

Pitch (间距): 10.20mm
Applicable product (适用产品): TS10 Series



TSFB16

Pitch (间距): 12.20mm
Applicable product (适用产品): TS16 Series



TKFB2.5

Pitch (间距): 5.20mm
Applicable product (适用产品): TK2.5 Series
TS2.5 Series



TKFB4

Pitch (间距): 6.20mm
Applicable product (适用产品): TK4 Series
TS4 Series



TKFB6

Pitch (间距): 8.20mm
Applicable product (适用产品): TK6 Series



TKFB10

Pitch (间距): 10.20mm
Applicable product (适用产品): TK10 Series



TKFB16

Pitch (间距): 12.20mm
Applicable product (适用产品): TK16 Series



TKFB35

Pitch (间距): 16.00mm
Applicable product (适用产品): TK35 Series



TKFB6-TD-01-XXP

Thickness (厚度): 8.20mm
Approval (认证): UL(Applying) VDE(Applying)
Rated voltage (电压): / /
Rated current (电流): 37A 37A
Wire range (线径): / /
Pole number (位数): XXP



TKFB6-TD-02-XXP

Thickness (厚度): 8.20mm
Approval (认证): UL(Applying) VDE(Applying)
Rated voltage (电压): / /
Rated current (电流): 37A 37A
Wire range (线径): / /
Pole number (位数): XXP

TS & TK SERIES - Din Rail Terminal Block



MARK1.5DB-M

Pitch (间距): 3.50mm
Applicable product (适用产品): TS1.5 Series



MARK2.5DB-M

Pitch (间距): 5.20mm
Applicable product (适用产品): TK2.5 Series
TS2.5 Series



MARK4DB-M

Pitch (间距): 6.20mm
Applicable product (适用产品): TK4 Series
TS4 Series



MARK6DB-M

Pitch (间距): 8.20mm
Applicable product (适用产品): TK6 Series
TS6 Series



MARK10DB-M

Pitch (间距): 10.20mm
Applicable product (适用产品): TK10 Series
TS10 Series



MARK16DB-M

Pitch (间距): 12.20mm
Applicable product (适用产品): TK16 Series
TS16 Series



MARK35DB-M

Pitch (间距): 16.00mm
Applicable product (适用产品): TK35 Series



MARK1.5DB-S

Pitch (间距): 3.50mm
Applicable product (适用产品): TS1.5 Series



MARK2.5DB-S

Pitch (间距): 5.20mm
Applicable product (适用产品): TS2.5 Series



MARK4DB-S

Pitch (间距): 6.20mm
Applicable product (适用产品): TS4 Series



MARK6DB-S

Pitch (间距): 8.20mm
Applicable product (适用产品): TS6 Series



MARK10DB-S

Pitch (间距): 10.20mm
Applicable product (适用产品): TS10 Series



MARK16DB-S

Pitch (间距): 12.20mm
Applicable product (适用产品): TS16 Series



THC35

Applicable Din Rail(适用的导轨): TH35-7.5

TERMINAL BLOCKS



Pitch (间距):	5.00mm
Pole number (位数):	02-10P




Pitch (间距):	5.00mm
Pole number (位数):	02-10P




Pitch (间距):	7.50mm
Pole number (位数):	02-03P




Pitch (间距):	10.20mm
Pole number (位数):	02-10P




Material (材质):	Brass
Plated (镀层):	Tin




Material (材质):	Brass
Plated (镀层):	Tin




Material (材质):	Brass
Plated (镀层):	Tin




Material (材质):	Brass
Plated (镀层):	Tin




Material (材质):	Brass
Plated (镀层):	Tin




Material (材质):	Brass
Plated (镀层):	Tin




Material (材质):	Brass
Plated (镀层):	Tin




Material (材质):	Brass
Plated (镀层):	Tin




Material (材质):	Brass
Plated (镀层):	Tin




Material (材质):	Solder Pin: Brass
	Rivet Nut: Stainless
	Screw: Steel
Plated (镀层):	Solder Pin: Tin
	Screw: Zn-Ni




Material (材质):	Solder Pin: Brass
	Nut: Steel
Plated (镀层):	Solder Pin: Tin
	Nut: Zn-Ni/Tin(A125)




Material (材质):	Solder Pin: Brass
	Nut: Steel
Plated (镀层):	Solder Pin: Tin
	Nut: Zn-Ni/Tin(A125)




Material (材质):	Solder Pin: Brass
	Rivet Nut: Stainless
	Screw: Steel
Plated (镀层):	Solder Pin: Tin
	Screw: Zn-Ni



Material (材质):	Solder Pin: Brass
	Rivet Nut: Stainless
	Screw: Steel
Plated (镀层):	Solder Pin: Tin
	Screw: Zn-Ni



Material (材质):	Solder Pin: Brass
	Rivet Nut: Stainless
	Screw: Steel
Plated (镀层):	Solder Pin: Tin
	Screw: Zn-Ni



Material (材质):	Solder Pin: Brass
	Rivet Nut: Stainless
	Screw: Steel
Plated (镀层):	Solder Pin: Tin
	Screw: Zn-Ni

Customized products

At Tianli, we are continually developing various kinds of products to provide more choices for our customers.


Tianli can also offer the manufacture of special products according to a customer's own design. We have a large Design Department, equipped with the latest design aids, and we also have our own assembly and moulding machinery in-house. Based on these, we can maximumly reduce our development cost.

Because we deem quality as the most important service we can offer to our customers, both the present and future clients can be assured of complete satisfaction.

Machining Parts



Injection Parts

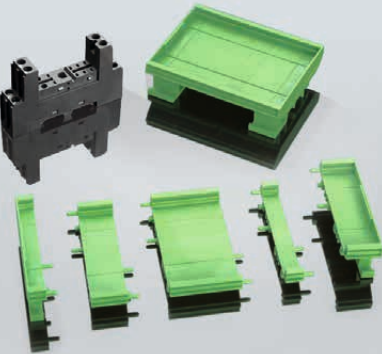


Printing Service



Stamping Parts



Different Color Combination

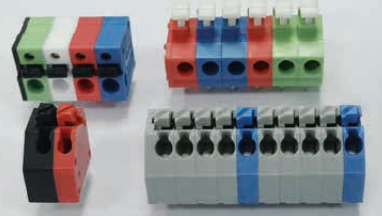

TIELEE[®] 天立电机

Tianli Electrical Machinery (Ningbo) Co., Ltd

天立电机（宁波）有限公司

地址：中国浙江省宁波杭州湾新区庵东工业园区纬三路 138 号

邮编：315327

国内销售：

电话：0574-6347-9600, 6347-9618

传真：0574-6389-7084, 6347-9611

Web: www.tielee.com

深圳办事处

地址：深圳市宝安区松岗街道联投东方 PARK 9 座 25C

电话：0755-8612-9295

传真：0755-8612-9295

Web: www.tielee.com

Tianli Electrical Machinery (Ningbo) Co., Ltd

ADD: 138, Weisan Rd., Andong Development Zone, Hangzhou Bay Area,
Ningbo, Zhejiang, 315327 China

Export Department:

TEL: +86-574-6347-9600, 6389-6436

FAX: +86-574-6389-7084, 6347-9611

Web: www.tielee.com

Shenzhen Office

ADD: 25C, Building A, Liantou East Park, Songgang Street,
Baoan District, Shenzhen, China

TEL: +86-755-8612-9295

FAX: +86-755-8612-9295

Web: www.tielee.com