


TIELEE®



ISO9001 ISO14001
IATF16949 ISO45001

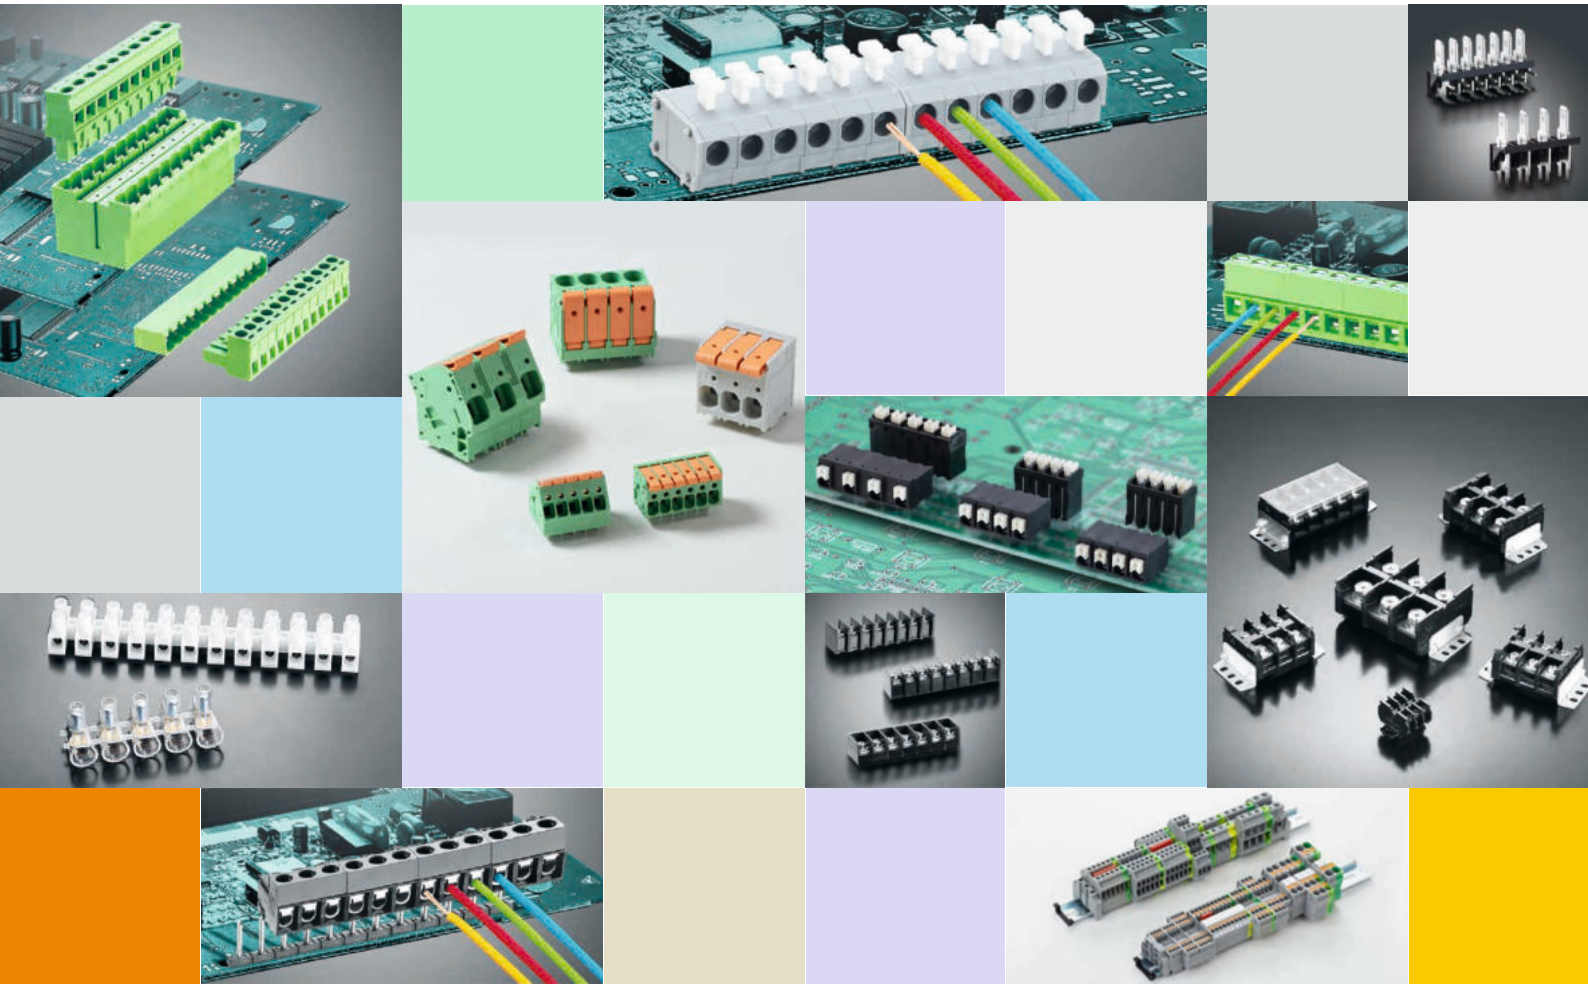

REACH



TERMINAL BLOCKS



TC-24.04



企业简介 Company profile

天立电机（宁波）有限公司成立于 1998 年，是亚洲领先的接线端子和金属零件制造商之一，为安防系统、工业自动化、电力、照明、电信、电源、轨道交通、新能源等行业的客户提供高质量的产品和服务。总部及生产基地位于宁波杭州湾新区，距上海仅 2 小时车程。货物运输和客户来访都相当便利。

天立已获得 ISO9001，ISO14001，IATF16949 和 ISO45001 管理系统认证，并拥有 UL 和 VDE 授权实验室。产品符合 RoHS 和 REACH 并获得了 ，，，，， 等认证。

为了保持进步赢得客户的青睐，天立对 CAD 设计，模具开发设备，产品注塑冲设备和员工技能培训有很大的投入。经过多年的努力，天立的销售网络涵盖全世界，并将不断为客户提供高质量的产品和专业服务，共创繁荣。


Founded in 1998, Tianli Electrical Machinery (Ningbo) Co., Ltd. is one of the leading manufacturers of terminal blocks and metal parts in Asia, providing high quality products and service to customers of security system, industrial automation, electric power, lighting, telecommunication, power supply, rail transportation, new energy and so on. The headquarter and facility is located in Hangzhou Bay New Zone, Ningbo, only 2 hours to Shanghai. The transportation is very convenient here for goods shipment & customer visiting.


Tianli has been granted ISO9001, ISO14001, IATF16949 and ISO45001 management system certifications and own the UL and VDE authorized laboratory. The products are approved by ，，，，，，RoHS and REACH.

To keep advancement and win the favor of customers, Tianli made large investment in CAD design, mould development equipments, injection/stamping machines and staff skills training. With years of efforts, Tianli’ s sales network covers the whole world, and will continuously supply customers with high quality products and professional service, reaching the achievement of win-win prosperity.

目录 Index

04-09	TLPS SERIES - Plug(Female) for Pluggable Terminal Block
09-16	TLPH SERIES - Header(Male) for Pluggable Terminal Block
16-18	TLC SERIES - Spring-cage Clamp Terminal Block
19-21	TL SERIES - Wire Protector PCB Screw Terminal Block
21-25	TL SERIES - Raising Clamp PCB Screw Terminal Block
25-30	TLM SERIES - PCB Spring Terminal Block
30-32	TLB SERIES - Terminal Strip
32-33	TPK SERIES - Panel Feed-through Terminal Block
33	TLF SERIES - Fuse Terminal Block
33	FH SERIES - Fuse Holder
34	TQQ & TQS SERIES - PCB Fast Connector
35-39	B & T SERIES - Barrier Terminal Block
39-41	TB SERIES - Moldular and Rail-Mounted Terminal Block
42-48	TS & TK SERIES - Din Rail Terminal Block
49	Metal Parts
50	Customized Products

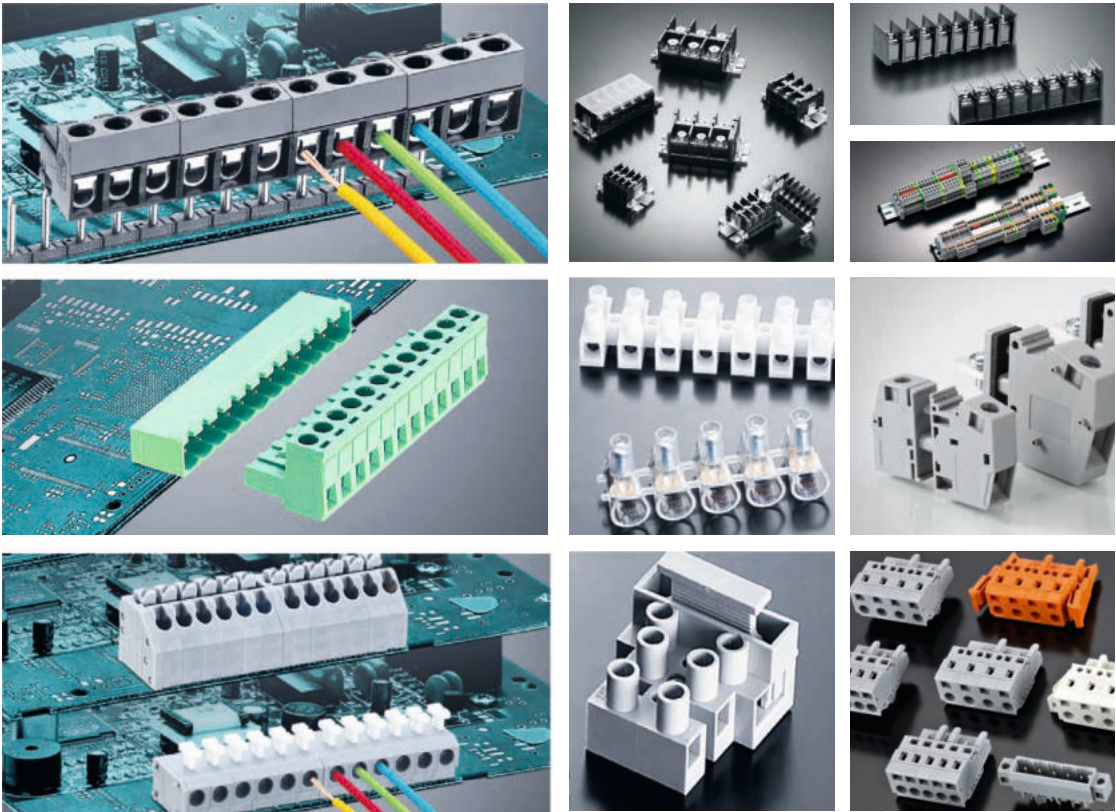




TLPS-515

Pitch (间距):	7.62mm	
Approval (认证):	 VDE(Applying)	
Rated voltage (电压):	300V	1000V
Rated current (电流):	16A	20A
Wire range (线径):	30-12AWG 0.2-2.5mm ²	
Pole number (位数):	02-12P	



TLPHS-518

Pitch (间距):	7.62mm	
Approval (认证):	UL(Applying)	VDE(Applying)
Rated voltage (电压):	300V	400V
Rated current (电流):	10A	12A
Wire gauge (线径):	26-12AWG	0.2-2.5mm ²
Pole number (位数):	02-12P	



TLPSW-505V

Pitch (间距):	7.62mm	
Approval (认证):	UL(Applying)	VDE(Applying)
Rated voltage (电压):	300V	1000V
Rated current (电流):	16A	20A
Pole number (位数):	02-16P	


**TLPSW-501**

Pitch (间距):	7.62mm	
Approval (认证):		
Rated voltage (电压):	600V	1000V
Rated current (电流):	41A	41A
Wire range (线径):	24-8AWG	0.34-6mm ²
Pole number (位数):	02-14P	




TLPS-519

Pitch (间距):	7.62mm
Approval (认证):	UL(Applying) VDE(Applying)
Rated voltage (电压):	600V 800V
Rated current (电流):	35A 41A
Wire range (线径):	20-8AWG 0.5-6mm ² 10mm ² str
Pole number (位数):	02-12P




TLPSW-522

Pitch (间距):	7.62mm
Approval (认证):	UL(Applying) VDE(Applying)
Rated voltage (电压):	600V 1000V
Rated current (电流):	31A 41A
Wire range (线径):	24~8AWG 0.2~6mm ² 10mm ² Sol
Pole number (位数):	02~12P



TLPSW-823

Pitch (间距):	10.16mm	
Approval (认证):	UL(Applying)	VDE(Applying)
Rated voltage (电压):	600V	1000V
Rated current (电流):	50A	41A
Wire range (线径):	20~8AWG 0.2~6mm ² 10mm ² Sol	
Pole number (位数):	02~11P	



TLPHW-001V(TLPHW-100V)

Pitch (间距):	3.50mm(3.81mm)	
Approval (认证):		
Rated voltage (电压):	300V	160V
Rated current (电流):	13A	10A
Pole number (位数):	02-24P	

**TLPHW-100RL**

Pitch (间距):	3.81mm
Approval (认证):	 VDE(Applying)
Rated voltage (电压):	300V 320V
Rated current (电流):	13A 10A
Pole number (位数):	02~24P



TLPHDC-010R

Pitch (间距):	3.50mm
Approval (认证):	
Rated voltage (电压):	300V 160V
Rated current (电流):	8A 10A
Pole number (位数):	04-48P



TLPHDW-010R

Pitch (间距):	3.50mm
Approval (认证):	
Rated voltage (电压):	300V 160V
Rated current (电流):	8A 10A
Pole number (位数):	04-48P



TLPHDC-200V(TLPHDC-300V)

Pitch (间距):	5.00mm (5.08mm)
Approval (认证):	
Rated voltage (电压):	300V 320V
Rated current (电流):	16A 20A
Pole number (位数):	04-48P



TLPHDW-200V(TLPHDW-300V)

Pitch (间距):	5.00mm(5.08mm)
Approval (认证):	
Rated voltage (电压):	300V 320V
Rated current (电流):	16A 20A
Pole number (位数):	04-48P



TLPHDC-200R(TLPHDC-300R)

Pitch (间距):	5.00mm(5.08mm)
Approval (认证):	
Rated voltage (电压):	300V 320V
Rated current (电流):	16A 20A
Pole number (位数):	04-48P



TLPHDW-200R(TLPHDW-300R)

Pitch (间距):	5.00mm (5.08mm)
Approval (认证):	
Rated voltage (电压):	300V 320V
Rated current (电流):	16A 20A
Pole number (位数):	04-48P



TLPHD-203V(TLPHD-303V)

Pitch (间距):	5.00mm (5.08mm)
Approval (认证):	
Rated voltage (电压):	300V 320V
Rated current (电流):	16A 20A
Pole number (位数):	04-48P



TLPHDC-203V(TLPHDC-303V)

Pitch (间距):	5.00mm (5.08mm)
Approval (认证):	
Rated voltage (电压):	300V 320V
Rated current (电流):	16A 20A
Pole number (位数):	04-48P



TLPHDW-203V(TLPHDW-303V)

Pitch (间距):	5.00mm(5.08mm)
Approval (认证):	
Rated voltage (电压):	300V 320V
Rated current (电流):	16A 20A
Pole number (位数):	04-48P



TLPHD-203R(TLPHD-303R)

Pitch (间距):	5.00mm (5.08mm)
Approval (认证):	
Rated voltage (电压):	300V 320V
Rated current (电流):	16A 20A
Pole number (位数):	04-48P



TLPHDC-203R(TLPHDC-303R)

Pitch (间距):	5.00mm (5.08mm)
Approval (认证):	
Rated voltage (电压):	300V 320V
Rated current (电流):	16A 20A
Pole number (位数):	04-48P



TLPHDW-203R(TLPHDW-303R)

Pitch (间距):	5.00mm(5.08mm)
Approval (认证):	
Rated voltage (电压):	300V 320V
Rated current (电流):	16A 20A
Pole number (位数):	04-48P



TLPCK-001-S

Applicable product (适用产品)
TLPHC/W/L-001 (TLPHC/W/L-100) TLPHS-100
TLPHC/W-004 (TLPHC/W-104) TLPHS (W/WA)-112
TLPHDC/W-005 (TLPHC/W-105) TLPHC/W-313
TLPHDC/W/L-007
TLPHDC/W-008 (TLPHDC/W-108)



TLPCK-002-S

Applicable product (适用产品)
TLPS(W)-200/300/400/500 TLPS(W)-201/302
TLPS(W)-207 TLPS(W)-308
TLPS(W)-214 TLPS(W)-309
TLPS(W)-215/301 TLPS(W)-312
TLPS(W)-305 TLPS(W)-502



TLPCK-003-S

Applicable product (适用产品)
TLPH(C/W)-200/300/400/500
TLPHC(W)-207 TLPHC(W)-501
TLPHDC(W)-200 TLPHC(W)-516
TLPH-201 TLPHC(W)-516
TLPHD(C/W)-203/303 TLPHC(W)-800
TLPHS(W/WA)-304 TLPHC(W)-800
TLPHW-306




TLPCK-004-S

Applicable product (适用产品)
TLPS(W)-501 TLPS(W)-516
TLPHC(W)-501 TLPHC(W)-516
TLPS(W)-800
TLPHC(W)-800




TLPCK-006-S


Applicable product (适用产品)
TLPSD(W/L)-010
TLPHDC(W)-010



Applicable product (适用产品)
TLPSD(W/L)-010
TLPHDC(W)-010



Applicable product (适用产品)
TLPSD(W/L)-010
TLPHDC(W)-010



Applicable product (适用产品)
TLPSD(W/L)-010
TLPHDC(W)-010



TLPHC-001V-XXP-HT
(TLPHC-100V-XXP-HT)

Pitch (间距):	3.50mm(3.81mm)
Approval (认证):	
Rated voltage (电压):	300V 320V
Rated current (电流):	13A 10A
Pole number (位数):	02-24P



TLPHL-001V-XXP-HT

Pitch (间距):	3.50mm
Approval (认证):	VDE(Applying)
Rated voltage (电压):	300V 320V
Rated current (电流):	13A 10A
Pole number (位数):	02-24P



TLPHW-001V-XXP-HT
(TLPHW-100V-XXP-HT)

Pitch (间距):	3.50mm(3.81mm)
Approval (认证):	
Rated voltage (电压):	300V 320V
Rated current (电流):	13A 10A
Pole number (位数):	02-24P



TLPHC-001R-XXP-HT
(TLPHC-100R-XXP-HT)

Pitch (间距):	3.50mm(3.81mm)
Approval (认证):	
Rated voltage (电压):	300V 320V
Rated current (电流):	13A 10A
Pole number (位数):	02-24P



TLPHL-001R-XXP-HT

Pitch (间距):	3.50mm
Approval (认证):	VDE(Applying)
Rated voltage (电压):	300V 320V
Rated current (电流):	13A 10A
Pole number (位数):	02-24P



TLPHW-001R-XXP-HT
(TLPHW-100R-XXP-HT)

Pitch (间距):	3.50mm(3.81mm)
Approval (认证):	
Rated voltage (电压):	300V 320V
Rated current (电流):	13A 10A
Pole number (位数):	02-24P



TLPH-200V-XXP-HT
(TLPH-300V-XXP-HT)

Pitch (间距):	5.00mm(5.08mm)
Approval (认证):	
Rated voltage (电压):	300V 630V
Rated current (电流):	16A 20A
Pole number (位数):	02-24P



TLPHC-200V-XXP-HT
(TLPHC-300V-XXP-HT)

Pitch (间距):	5.00mm(5.08mm)
Approval (认证):	
Rated voltage (电压):	300V 630V
Rated current (电流):	16A 20A
Pole number (位数):	02-24P



TLPHW-200V-XXP-HT
(TLPHW-300V-XXP-HT)

Pitch (间距):	5.00mm(5.08mm)
Approval (认证):	
Rated voltage (电压):	300V 630V
Rated current (电流):	16A 20A
Pole number (位数):	02-24P



TLPH-200R-XXP-HT
(TLPH-300R-XXP-HT)

Pitch (间距):	5.00mm(5.08mm)
Approval (认证):	
Rated voltage (电压):	300V 630V
Rated current (电流):	16A 20A
Pole number (位数):	02-24P



TLPHC-200R-XXP-HT
(TLPHC-300R-XXP-HT)

Pitch (间距):	5.00mm(5.08mm)
Approval (认证):	
Rated voltage (电压):	300V 630V
Rated current (电流):	16A 20A
Pole number (位数):	02-24P



TLPHW-200R-XXP-HT
(TLPHW-300R-XXP-HT)

Pitch (间距):	5.00mm(5.08mm)
Approval (认证):	
Rated voltage (电压):	300V 630V
Rated current (电流):	16A 20A
Pole number (位数):	02-24P



TLPHC-313V-XXP-HT

Pitch (间距):	5.08mm
Approval (认证):	
Rated voltage (电压):	300V 630V
Rated current (电流):	13A 13A
Pole number (位数):	02-24P



TLPHW-313V-XXP-HT

Pitch (间距):	5.08mm
Approval (认证):	
Rated voltage (电压):	300V 630V
Rated current (电流):	13A 13A
Pole number (位数):	02-24P



TLPHC-313R-XXP-HT

Pitch (间距):	5.08mm
Approval (认证):	
Rated voltage (电压):	300V 630V
Rated current (电流):	13A 13A
Pole number (位数):	02-24P



TLPHW-313R-XXP-HT

Pitch (间距):	5.08mm
Approval (认证):	
Rated voltage (电压):	300V 630V
Rated current (电流):	13A 13A
Pole number (位数):	02-24P



TLPHDC-020V-XXP-HT

Pitch (间距):	2.54mm
Approval (认证):	VDE(Applying)
Rated voltage (电压):	150V 320V
Rated current (电流):	5A 6A
Pole number (位数):	04-48P



TLPHDW-020V-XXP-HT

Pitch (间距):	2.54mm
Approval (认证):	VDE(Applying)
Rated voltage (电压):	150V 320V
Rated current (电流):	5A 6A
Pole number (位数):	04-48P



TLPHDC-020R-XXP-HT

Pitch (间距):	2.54mm
Approval (认证):	VDE(Applying)
Rated voltage (电压):	150V 320V
Rated current (电流):	5A 6A
Pole number (位数):	04-48P



TLPHDW-020R-XXP-HT

Pitch (间距):	2.54mm
Approval (认证):	VDE(Applying)
Rated voltage (电压):	150V 320V
Rated current (电流):	5A 6A
Pole number (位数):	04-48P

TLPH SERIES - Header(Male) for Pluggable Terminal Block




TLPHDC-007V-XXP-HT

Pitch (间距):	3.50mm
Approval (认证):	 
Rated voltage (电压):	300V 160V
Rated current (电流):	8A 10A
Pole number (位数):	04-48P



TLPHDL-007V-XXP-HT

Pitch (间距):	3.50mm
Approval (认证):	 
Rated voltage (电压):	300V 160V
Rated current (电流):	8A 10A
Pole number (位数):	04-48P



TLPHDC-007R-XXP-HT

Pitch (间距):	3.50mm
Approval (认证):	 
Rated voltage (电压):	300V 160V
Rated current (电流):	8A 10A
Pole number (位数):	04-48P



TLPHDL-007R-XXP-HT

Pitch (间距):	3.50mm
Approval (认证):	 
Rated voltage (电压):	300V 160V
Rated current (电流):	8A 10A
Pole number (位数):	04-48P



TLPHDC-010V-XXP-HT

Pitch (间距):	3.50mm
Approval (认证):	 
Rated voltage (电压):	300V 160V
Rated current (电流):	8A 10A
Pole number (位数):	04-48P



TLPHDW-010V-XXP-HT

Pitch (间距):	3.50mm
Approval (认证):	 
Rated voltage (电压):	300V 160V
Rated current (电流):	8A 10A
Pole number (位数):	04-48P



TLPHDC-010R-XXP-HT

Pitch (间距):	3.50mm
Approval (认证):	 
Rated voltage (电压):	300V 160V
Rated current (电流):	8A 10A
Pole number (位数):	04-48P



TLPHDW-010R-XXP-HT

Pitch (间距):	3.50mm
Approval (认证):	 
Rated voltage (电压):	300V 160V
Rated current (电流):	8A 10A
Pole number (位数):	04-48P



TLCH-002V

Pitch (间距):	2.50mm
Approval (认证):	 VDE(Applying)
Rated voltage (电压):	150V 160V
Rated current (电流):	4A 6A
Pole number (位数):	02-24P



TLCH-002R

Pitch (间距):	2.50mm
Approval (认证):	 VDE(Applying)
Rated voltage (电压):	150V 160V
Rated current (电流):	4A 6A
Pole number (位数):	02-24P



TLCH-001V(TLCH-100V)

Pitch (间距):	3.50mm (3.81mm)
Approval (认证):	 
Rated voltage (电压):	300V 160V
Rated current (电流):	12A 10A
Pole number (位数):	02-24P



TLCH-001R(TLCH-100R)

Pitch (间距):	3.50mm (3.81mm)
Approval (认证):	 
Rated voltage (电压):	300V 160V
Rated current (电流):	12A 10A
Pole number (位数):	02-24P



TLCH-200V(TLCH-300V)

Pitch (间距):	5.00mm(5.08mm)
Approval (认证):	 
Rated voltage (电压):	300V 320V
Rated current (电流):	16A 16A
Pole number (位数):	02-24P



TLCH-200VA

Pitch (间距):	5.00mm
Approval (认证):	 
Rated voltage (电压):	300V 320V
Rated current (电流):	16Amm 16A
Pole number (位数):	02-24P



TLCHM-200V(TLCHM-300V)

Pitch (间距):	5.00mm(5.08mm)
Approval (认证):	 
Rated voltage (电压):	300V 320V
Rated current (电流):	16A 16A
Pole number (位数):	02-24P



TLCHM-200VA

Pitch (间距):	5.00mm
Approval (认证):	 
Rated voltage (电压):	300V 320V
Rated current (电流):	16A 16A
Pole number (位数):	02-24P



TLCH-200R(TLCH-300R)

Pitch (间距):	5.00mm(5.08mm)
Approval (认证):	 
Rated voltage (电压):	300V 320V
Rated current (电流):	16A 16A
Pole number (位数):	02-24P



TLCH-200RA

Pitch (间距):	5.00mm
Approval (认证):	 
Rated voltage (电压):	300V 320V
Rated current (电流):	16A 16A
Pole number (位数):	02-24P



TLCHM-200R(TLCHM-300R)

Pitch (间距):	5.00mm(5.08mm)
Approval (认证):	 
Rated voltage (电压):	300V 320V
Rated current (电流):	16A 16A
Pole number (位数):	02-24P



TLCHW-300V

Pitch (间距):	5.08mm
Approval (认证):	 
Rated voltage (电压):	300V 320V
Rated current (电流):	16A 16A
Pole number (位数):	02-24P

TLC SERIES - Spring-cage Clamp Terminal Block



TLCH-400V(TLCH-500V)

Pitch (间距):	7.50mm (7.62mm)
Approval (认证):	 
Rated voltage (电压):	300V 630V
Rated current (电流):	16A 16A
Pole number (位数):	02-12P




TLCH-400VA

Pitch (间距):	7.50mm
Approval (认证):	 
Rated voltage (电压):	300V 630V
Rated current (电流):	16A 16A
Pole number (位数):	02-12P



TLCHM-400V(TLCHM-500V)

Pitch (间距):	7.50mm (7.62mm)
Approval (认证):	 
Rated voltage (电压):	300V 630V
Rated current (电流):	16A 16A
Pole number (位数):	02-12P




TLCHM-400VA

Pitch (间距):	7.50mm
Approval (认证):	 
Rated voltage (电压):	300V 630V
Rated current (电流):	16A 16A
Pole number (位数):	02-12P



TLCH-400R(TLCH-500R)

Pitch (间距):	7.50mm (7.62mm)
Approval (认证):	 
Rated voltage (电压):	300V 630V
Rated current (电流):	16A 16A
Pole number (位数):	02-12P



TLCH-400RA

Pitch (间距):	7.50mm
Approval (认证):	 
Rated voltage (电压):	300V 630V
Rated current (电流):	16A 16A
Pole number (位数):	02-12P



TLCHM-400R(TLCHM-500R)

Pitch (间距):	7.50mm (7.62mm)
Approval (认证):	 
Rated voltage (电压):	300V 630V
Rated current (电流):	16A 16A
Pole number (位数):	02-12P



TLCP-002

Pitch (间距):	2.50mm
Approval (认证):	
Rated voltage (电压):	150V
Rated current (电流):	4A
Wire range (线径):	28-20AWG
Pole number (位数):	02-24P



TLCP-001(TLCP-100)

Pitch (间距):	3.50mm (3.81mm)
Approval (认证):	 
Rated voltage (电压):	300V 160V
Rated current (电流):	12A 10A
Wire range (线径):	28-14AWG 0.2-1.5mm²
Pole number (位数):	02-24P



TLCPL-001(TLCPL-100)

Pitch (间距):	3.50mm (3.81mm)
Approval (认证):	 
Rated voltage (电压):	300V 160V
Rated current (电流):	12A 10A
Wire range (线径):	28-14AWG 0.2-1.5mm²
Pole number (位数):	02-24P



TLCP-200(TLCP-300)

Pitch (间距):	5.00mm (5.08mm)
Approval (认证):	 
Rated voltage (电压):	300V 320V
Rated current (电流):	16A 16A
Wire range (线径):	12-28AWG 0.2-2.5mm²
Pole number (位数):	02-24P



TLCP-200A

Pitch (间距):	5.00mm
Approval (认证):	 
Rated voltage (电压):	300V 320V
Rated current (电流):	16A 16A
Wire range (线径):	12-28AWG 0.2-2.5mm²
Pole number (位数):	02-24P



TLCP-200F(TLCP-300F)

Pitch (间距):	5.00mm (5.08mm)
Approval (认证):	 
Rated voltage (电压):	300V 320V
Rated current (电流):	16A 16A
Wire range (线径):	12-28AWG 0.2-2.5mm²
Pole number (位数):	02-24P



TLCP-200FA

Pitch (间距):	5.00mm
Approval (认证):	 
Rated voltage (电压):	300V 320V
Rated current (电流):	16A 16A
Wire range (线径):	12-28AWG 0.2-2.5mm²
Pole number (位数):	02-24P



TLCPM-200(TLCPM-300)

Pitch (间距):	5.00mm (5.08mm)
Approval (认证):	 
Rated voltage (电压):	300V 320V
Rated current (电流):	16A 16A
Wire range (线径):	12-28AWG 0.2-2.5mm²
Pole number (位数):	02-24P



TLCPM-200A

Pitch (间距):	5.00mm
Approval (认证):	 
Rated voltage (电压):	300V 320V
Rated current (电流):	16A 16A
Wire range (线径):	12-28AWG 0.2-2.5mm²
Pole number (位数):	02-24P



TLCPL-200(TLCPL-300)

Pitch (间距):	5.00mm (5.08mm)
Approval (认证):	 
Rated voltage (电压):	300V 320V
Rated current (电流):	16A 16A
Wire range (线径):	12-28AWG 0.2-2.5mm²
Pole number (位数):	02-24P



TLCPL-200A

Pitch (间距):	5.00mm
Approval (认证):	 
Rated voltage (电压):	300V 320V
Rated current (电流):	16A 16A
Wire range (线径):	12-28AWG 0.2-2.5mm²
Pole number (位数):	02-24P



TLCPW-300

Pitch (间距):	5.08mm
Approval (认证):	 
Rated voltage (电压):	300V 320V
Rated current (电流):	16A 16A
Wire range (线径):	12-28AWG 0.2-2.5mm²
Pole number (位数):	02-24P



TLCP-400(TLCP-500)

Pitch (间距):	7.50mm (7.62mm)
Approval (认证):	 
Rated voltage (电压):	300V 630V
Rated current (电流):	16A 16A
Wire range (线径):	12-28AWG 0.2-2.5mm²
Pole number (位数):	02-12P



Pitch (间距):	7.50mm
Approval (认证):	
Rated voltage (电压):	300V 630V
Rated current (电流):	16A 16A
Wire range (线径):	12-28AWG 0.2-2.5mm²
Pole number (位数):	02-12P



Pitch (间距):	7.50mm (7.62mm)
Approval (认证):	
Rated voltage (电压):	300V 630V
Rated current (电流):	16A 16A
Wire range (线径):	12-28AWG 0.2-2.5mm²
Pole number (位数):	02-12P



Pitch (间距):	7.50mm
Approval (认证):	
Rated voltage (电压):	300V 630V
Rated current (电流):	16A 16A
Wire range (线径):	12-28AWG 0.2-2.5mm²
Pole number (位数):	02-12P



Pitch (间距):	7.50mm (7.62mm)
Approval (认证):	
Rated voltage (电压):	300V 630V
Rated current (电流):	16A 16A
Wire range (线径):	12-28AWG 0.2-2.5mm²
Pole number (位数):	02-12P



Pitch (间距):	7.50mm
Approval (认证):	
Rated voltage (电压):	300V 630V
Rated current (电流):	16A 16A
Wire range (线径):	12-28AWG 0.2-2.5mm²
Pole number (位数):	02-12P



Pitch (间距):	7.50mm (7.62mm)
Approval (认证):	
Rated voltage (电压):	300V 630V
Rated current (电流):	16A 16A
Wire range (线径):	12-28AWG 0.2-2.5mm²
Pole number (位数):	02-12P



Pitch (间距):	7.50mm
Approval (认证):	
Rated voltage (电压):	300V 630V
Rated current (电流):	16A 16A
Wire range (线径):	12-28AWG 0.2-2.5mm²
Pole number (位数):	02-12P



Pitch (间距):	2.50mm
Approval (认证):	VDE(Applying)
Rated voltage (电压):	150V 160V
Rated current (电流):	4A 6A
Wire range (线径):	28-20AWG 0.2-0.5mm²
Pole number (位数):	02-24P



Pitch (间距):	5.00mm
Approval (认证):	UL(Applying)
Rated voltage (电压):	300V
Rated current (电流):	16A
Wire range (线径):	22-12AWG
Pole number (位数):	02-24P



Pitch (间距):	5.00mm
Approval (认证):	UL(Applying)
Rated voltage (电压):	300V
Rated current (电流):	16A
Wire range (线径):	22-12AWG
Pole number (位数):	02-24P



Pitch (间距):	5.00mm
Approval (认证):	VDE(Applying)
Rated voltage (电压):	300V 320V
Rated current (电流):	14.5A 16A
Wire range (线径):	28-14AWG 0.2-2.5mm²
Pole number (位数):	02-14P



Pitch (间距):	5.00mm
Approval (认证):	VDE(Applying)
Rated voltage (电压):	300V 250V
Rated current (电流):	14.5A 16A
Pole number (位数):	02-14P



Pitch (间距):	7.50mm
Approval (认证):	VDE(Applying)
Rated voltage (电压):	300V 630V
Rated current (电流):	16A 16A
Wire range (线径):	28-14AWG 0.2-2.5mm²
Pole number (位数):	03-12P



Pitch (间距):	7.50mm
Approval (认证):	VDE(Applying)
Rated voltage (电压):	300V 630V
Rated current (电流):	16A 16A
Pole number (位数):	03-12P



Pitch (间距):	7.50mm
Approval (认证):	VDE(Applying)
Rated voltage (电压):	300V 630V
Rated current (电流):	16A 16A
Wire range (线径):	28-14AWG 0.2-2.5mm²
Pole number (位数):	03-06P



Pitch (间距):	7.50mm
Approval (认证):	VDE(Applying)
Rated voltage (电压):	300V 630V
Rated current (电流):	16A 16A
Pole number (位数):	04-06P




Material (材质):	PA66
Applicable product(适用产品)	TLCP/L/M/W-200/300/400/500
TLCP/L/M/W-200A/400A	
TLCP/L/M/W-200F/300F/400F/500F	
TLCP/L/M/W-200FA/400FA	



Material (材质):	PA66
Applicable product(适用产品)	TLCP-001
TLCP-100	



Material (材质):	PA66
Applicable product(适用产品)	TLCP-002
TLCP-003	



Material (材质):	PA66
Applicable product(适用产品)	TLCP-004
TLCP-005	



Pitch (间距):	3.50mm(3.81mm)
Approval (认证):	
Rated voltage (电压):	300V
Rated current (电流):	10A
Wire range (线径):	24-16AWG
Pole number (位数):	02-24P



Pitch (间距):	3.50mm(3.81mm)
Approval (认证):	
Rated voltage (电压):	300V
Rated current (电流):	10A
Wire range (线径):	24-16AWG
Pole number (位数):	02-24P



Pitch (间距):	3.50mm
Approval (认证):	
Rated voltage (电压):	300V 160V
Rated current (电流):	10A 17.5A
Wire range (线径):	26-16AWG 0.2-1.5mm²
Pole number (位数):	02-24P



Pitch (间距):	3.50mm
Approval (认证):	
Rated voltage (电压):	300V 160V
Rated current (电流):	10A 17.5A
Wire range (线径):	26-16AWG 0.2-1.5mm²
Pole number (位数):	02-24P



Pitch (间距):	3.50mm
Approval (认证):	
Rated voltage (电压):	300V 160V
Rated current (电流):	10A 17.5A
Wire range (线径):	26-16AWG 0.2-1.5mm²
Pole number (位数):	02-24P



Pitch (间距):	3.50mm
Approval (认证):	
Rated voltage (电压):	300V 160V
Rated current (电流):	10A 13.5A
Wire range (线径):	26-18AWG(sol/str) 16AWG(sol) 0.2-1mm²
Pole number (位数):	02-24P



Pitch (间距):	5.00mm(5.08mm)
Approval (认证):	
Rated voltage (电压):	300V 250V
Rated current (电流):	15A 24A
Wire range (线径):	22-14AWG 0.5-2.5mm²
Pole number (位数):	02-24P



Pitch (间距):	5.00mm(5.08mm)
Approval (认证):	
Rated voltage (电压):	300V 250V
Rated current (电流):	15A 24A
Wire range (线径):	22-14AWG 0.5-2.5mm²
Pole number (位数):	02-24P



Pitch (间距):	5.00mm(5.08mm)
Approval (认证):	(5.08mm Applying)
Rated voltage (电压):	300V 250V
Rated current (电流):	16A 16A
Wire range (线径):	22-14AWG 0.34-1.5mm² 2.5mm² sol
Pole number (位数):	02-24P



Pitch (间距):	5.00mm(5.08mm)
Approval (认证):	(5.08mm Applying)
Rated voltage (电压):	300V 130V
Rated current (电流):	16A 16A
Wire range (线径):	22-14AWG 0.34-1.5mm² 2.5mm² sol
Pole number (位数):	02-24P



Pitch (间距):	5.00mm
Approval (认证):	VDE(Applying)
Rated voltage (电压):	300V 320V
Rated current (电流):	16A 32A
Wire range (线径):	22-12AWG 1.5-4mm²
Pole number (位数):	02-26P



Pitch (间距):	5.00mm
Approval (认证):	
Rated voltage (电压):	300V 320V
Rated current (电流):	20A 32A
Wire range (线径):	20-12AWG 0.5-4mm²
Pole number (位数):	02-24P



Pitch (间距):	5.00mm
Approval (认证):	
Rated voltage (电压):	300V 320V
Rated current (电流):	20A 32A
Wire range (线径):	20-12AWG 0.5-4mm²
Pole number (位数):	02-24P



Pitch (间距):	5.00mm
Approval (认证):	
Rated voltage (电压):	300V 250V
Rated current (电流):	16A 16A
Wire range (线径):	26-12AWG 0.2-2.5mm²
Pole number (位数):	02-24P



Pitch (间距):	5.00mm
Approval (认证):	
Rated voltage (电压):	300V 320V
Rated current (电流):	16A 24A
Wire range (线径):	30-12AWG 0.2-2.5mm²
Pole number (位数):	02-24P



Pitch (间距):	5.00mm
Approval (认证):	VDE(Applying)
Rated voltage (电压):	250V 320V
Rated current (电流):	15A 24A
Wire range (线径):	22-12AWG 0.2-2.5mm²
Pole number (位数):	02-24P



Pitch (间距):	5.00mm
Approval (认证):	VDE(Applying)
Rated voltage (电压):	250V 320V
Rated current (电流):	15A 24A
Wire range (线径):	22-12AWG 0.2-2.5mm²
Pole number (位数):	02-24P



Pitch (间距):	5.00mm
Approval (认证):	
Rated voltage (电压):	300V
Rated current (电流):	15A
Wire range (线径):	22-14AWG
Pole number (位数):	02-24P



Pitch (间距):	5.00mm
Approval (认证):	VDE(Applying)
Rated voltage (电压):	300V 320V
Rated current (电流):	20A 20A
Wire range (线径):	26-12AWG(sol/str) 12AWG(sol) 0.5-2.5mm²
Pole number (位数):	02-24P



Pitch (间距):	5.00mm
Approval (认证):	
Rated voltage (电压):	300V 450V
Rated current (电流):	12A 12A
Wire range (线径):	18-12AWG 0.75-4mm²
Pole number (位数):	02-24P

TLB SERIES - Terminal Strip



TLB-01

Approval (认证):	VDE(Applying)
Rated voltage (电压):	450V
Rated current (电流):	24A
Wire range (线径):	2.5mm ²
Pole number (位数):	01–10P




TLB-02

Approval (认证):	VDE(Applying)
Rated voltage (电压):	450V
Rated current (电流):	32A
Wire range (线径):	4.0mm ²
Pole number (位数):	01–10P



TLB-03

Approval (认证):	VDE(Applying)
Rated voltage (电压):	450V
Rated current (电流):	41A
Wire range (线径):	6.0mm ²
Pole number (位数):	01–10P





TLB-B001-02P

Pitch (间距):	15.00mm
Approval (认证):	UL(Applying) VDE(Applying)
Rated voltage (电压):	300V 320V
Rated current (电流):	16A 16A
Wire range (线径):	22–12AWG 0.5–4mm ²
Pole number (位数):	2P



TLB-B001-04P

Pitch (间距):	15.00mm
Approval (认证):	UL(Applying) VDE(Applying)
Rated voltage (电压):	300V 320V
Rated current (电流):	16A 16A
Wire range (线径):	22–12AWG 0.5–4mm ²
Pole number (位数):	4P



TPK SERIES - Panel Feed-through Terminal Block



TPK 4

Approval (认证):	UL US VDE(Applying)
Rated voltage (电压):	300V 500V
Rated current (电流):	30A 32A 41A (6mm ² sol)
Wire range (线径):	30–10AWG 0.2–4mm ² sol / str 6mm ² sol
Pole number (位数):	TPK 4



TPKV 4

Approval (认证):	UL US VDE(Applying)
Rated voltage (电压):	300V 500V
Rated current (电流):	30A 32A 41A (6mm ² sol)
Wire range (线径):	30–10AWG 0.2–4mm ² sol / str 6mm ² sol
Pole number (位数):	TPK 4



TPK 10

Approval (认证):	UL US VDE(Applying)
Rated voltage (电压):	300V 500V
Rated current (电流):	65A 57A 76A (16mm ² sol)
Wire range (线径):	20–6AWG 0.5–10mm ² sol / str 16mm ² sol
Pole number (位数):	TPK 10



TPK 10-VP

Approval (认证):	UL US VDE(Applying)
Rated voltage (电压):	300V 500V
Rated current (电流):	65A 57A 76A (16mm ² sol)
Wire range (线径):	20–6AWG 0.5–10mm ² sol / str 16mm ² sol
Pole number (位数):	TPK 10–VP



TPKV 10

Approval (认证):	UL US VDE(Applying)
Rated voltage (电压):	300V 500V
Rated current (电流):	65A 57A 76A (16mm ² sol)
Wire range (线径):	20–6AWG 0.5–10mm ² sol / str 16mm ² sol
Pole number (位数):	TPKV 10



TPKV 10-VP

Approval (认证):	UL US VDE(Applying)
Rated voltage (电压):	300V 500V
Rated current (电流):	65A 57A 76A (16mm ² sol)
Wire range (线径):	20–6AWG 0.5–10mm ² sol / str 16mm ² sol
Pole number (位数):	TPKV 10–VP



TPK 16

Approval (认证):	UL US VDE(Applying)
Rated voltage (电压):	600V 800V
Rated current (电流):	85A 76A 101A (25mm ² sol)
Wire range (线径):	20–4AWG 0.5–16mm ² sol / str 25mm ² sol
Pole number (位数):	TPK 16



TPK 16-VP

Approval (认证):	UL US VDE(Applying)
Rated voltage (电压):	600V 800V
Rated current (电流):	85A 76A 101A (25mm ² sol)
Wire range (线径):	20–4AWG 0.5–16mm ² sol / str 25mm ² sol
Pole number (位数):	TPK 16–VP



TPKV 16

Approval (认证):	UL US VDE(Applying)
Rated voltage (电压):	600V 800V
Rated current (电流):	85A 76A 101A (25mm ² sol)
Wire range (线径):	20–4AWG 0.5–16mm ² sol / str 25mm ² sol
Pole number (位数):	TPKV 16



TPKV 16-VP

Approval (认证):	UL US VDE(Applying)
Rated voltage (电压):	600V 800V
Rated current (电流):	85A 76A 101A (25mm ² sol)
Wire range (线径):	20–4AWG 0.5–16mm ² sol / str 25mm ² sol
Pole number (位数):	TPKV 16–VP



TPK 25

Approval (认证):	UL US VDE(Applying)
Rated voltage (电压):	600V 800V
Rated current (电流):	115A 101A 125A (35mm ² sol)
Wire range (线径):	10–2AWG 6–25mm ² sol / str 35mm ² sol
Pole number (位数):	TPK 25



TPK 25-VP

Approval (认证):	UL US VDE(Applying)
Rated voltage (电压):	600V 800V
Rated current (电流):	115A 101A 125A (35mm ² sol)
Wire range (线径):	10–2AWG 6–25mm ² sol / str 35mm ² sol
Pole number (位数):	TPK 25–VP

TPK SERIES - Panel Feed-through Terminal Block





TPKV 25

Approval (认证):	UL US VDE(Applying)
Rated voltage (电压):	600V 800V
Rated current (电流):	115A 101A 125A (35mm ² sol)
Wire range (线径):	10–2AWG 6–25mm ² sol / str 35mm ² sol
Pole number (位数):	TPKV 25



TPKV 25-VP

Approval (认证):	UL US VDE(Applying)
Rated voltage (电压):	600V 500V
Rated current (电流):	115A 101A 125A (35mm ² sol)
Wire range (线径):	10–2AWG 6–25mm ² sol / str 35mm ² sol
Pole number (位数):	TPKV 25–VP



TLF SERIES - Fuse Terminal Block




TLF-100-01P

Approval (认证):	UL US Fuse
Rated voltage (电压):	300V 250V
Rated current (电流):	13A 6.3A
Wire range (线径):	20–14AWG 0.5–2.5mm ²
Pole number (位数):	01P




TLF-100(TLF-100E/TLF-100W/TLF-100S/TLF-100EW/TLF-100SW)

Approval (认证):	UL US Terminal block	UL US Fuse
Rated voltage (电压):	300V 450V	300V 250V
Rated current (电流):	30A 20A(with W) 24A	13A 6.3A
Wire range (线径):	18–10AWG 18–12AWG(with W) 0.5–2.5mm ²	20–14AWG 0.5–2.5mm ²
Pole number (位数):	02–06P	




TLF-100-01P+TLF-100-01P

Approval (认证):	UL US Fuse
Rated voltage (电压):	300V 250V
Rated current (电流):	13A 6.3A
Wire range (线径):	20–14AWG 0.5–2.5mm ²
Pole number (位数):	01P+01P

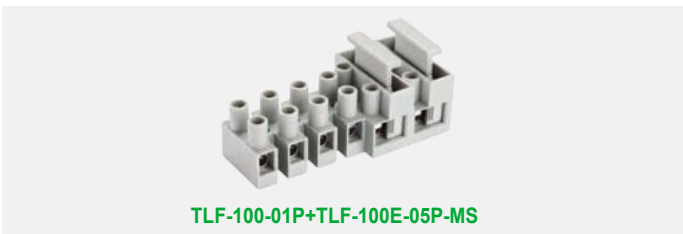

TLF-100-01P+TLF-100E-05P-MS

Pitch (间距):	10.00mm			
Approval (认证):	 Terminal block	 Fuse		
Rated voltage (电压):	300V	450V	300V	250V
Rated current (电流):	30A	24A	13A	6.3A
Wire range (线径):	18–10AWG	0.5–2.5mm ²	20–14AWG	0.5–2.5mm ²
Pole number (位数):	02–06P			



FH SERIES - Fuse Holder



FH-278-A

Fuse link (保险丝):	Φ5.0*20
Approval (认证):	UL US
Rated voltage (电压):	250V 250V
Rated current (电流):	10A 6.3A
Rated Power (功率):	1.6W



FH-278-NA

Fuse link (保险丝):	Φ5.0*20
Approval (认证):	UL(Applying) VDE(Applying)
Rated voltage (电压):	250V 250V
Rated current (电流):	10A 6.3A
Rated Power (功率):	1.6W



FH-145-A

Fuse link (保险丝):	Φ5.0*20
Approval (认证):	UL US
Rated voltage (电压):	250V 250V
Rated current (电流):	10A 10A
Rated Power (功率):	2.5W



FH-150-A

Fuse link (保险丝):	Φ5.0*20
Approval (认证):	UL US
Rated voltage (电压):	250V 250V
Rated current (电流):	10A 10A
Rated Power (功率):	2.5W



TQQ-A/B/C/D/E-5.0

Approval (认证):	UL
Housing (材料):	PC UL94V0
Wire range (端子适用线径 AWG):	16AWG
Rated Current (额定电流):	10A
Rated Voltage (额定电压):	300V AC
Pitch & poles (间距及位数):	5.08 (2P-17P) / 7.62 (2P-11P) / 10.16 (2P-9P) / 12.70 (2P-7P) / 15.24 (2P-6P)



TQQ-A/B/C/D/E-2863

Approval (认证):	UL
Housing (材料):	PC UL94V0
Wire range (端子适用线径 AWG):	14AWG
Rated Current (额定电流):	16A
Rated Voltage (额定电压):	300V AC
Pitch & poles (间距及位数):	5.08 (2P-17P) / 7.62 (2P-11P) / 10.16 (2P-9P) / 12.70 (2P-7P) / 15.24 (2P-6P)



TQS-A/B/C/D/E-5.0


Approval (认证):	UL
Housing (材料):	PC UL94V0
Wire range (母端子适用线径 AWG):	16AWG
Rated Current (额定电流):	10A
Rated Voltage (额定电压):	300V AC
Pitch & poles (间距及位数):	5.08 (2P-17P) / 7.62 (2P-11P) / 10.16 (2P-9P) / 12.70 (2P-7P) / 15.24 (2P-6P)



TQS-A/B/C/D/E-2863

Approval (认证):	UL
Housing (材料):	PC UL94V0
Wire range (端子适用线径 AWG):	14AWG
Rated Current (额定电流):	16A
Rated Voltage (额定电压):	300V AC
Pitch & poles (间距及位数):	5.08 (2P-17P) / 7.62 (2P-11P) / 10.16 (2P-9P) / 12.70 (2P-7P) / 15.24 (2P-6P)

PITCH CODE



B762-02-0773

Pitch (间距):	7.62mm	
Approval (认证):		
Rated voltage (电压):	300V	450V
Rated current (电流):	15A	17.5A
Wire range (线径):	22-14AWG	1.5mm ²
Pole number (位数):	02-34P	
Screw(螺丝):	M3	



B762[C]-02

Pitch (间距):	7.62mm
Approval (认证):	
Rated voltage (电压):	300V
Rated current (电流):	15A
Wire range (线径):	22-14AWG
Pole number (位数):	02-32P
Screw (螺丝):	M3




B762[C]W-02

Pitch (间距):	7.62mm
Approval (认证):	
Rated voltage (电压):	300V
Rated current (电流):	15A
Wire range (线径):	22-14AWG
Pole number (位数):	02-30P
Screw(螺丝):	M3



B825-02

Pitch (间距):	8.25mm	
Approval (认证):		
Rated voltage (电压):	300V	450V
Rated current (电流):	20A	
Wire range (线径):	22-12AWG	1.5mm ²
Pole number (位数):	02-14P	
Screw(螺丝):	M3	



B825C-03

Pitch (间距):	8.25mm
Approval (认证):	
Rated voltage (电压):	300V
Rated current (电流):	20A
Wire range (线径):	22-12AWG
Pole number (位数):	02-24P
Screw (螺丝):	M3



B762-03-1498

Pitch (间距):	7.62mm
Approval (认证):	
Rated voltage (电压):	300V
Rated current (电流):	15A
Wire range (线径):	22~14AWG
Pole number (位数):	02~34P
Screw(螺丝):	M3




B762[C]-04

Pitch (间距):	7.62mm
Approval (认证):	
Rated voltage (电压):	300V
Rated current (电流):	15A
Wire range (线径):	22-14AWG
Pole number (位数):	02-32P
Screw (螺丝):	M3




B762[C]W-04

Pitch (间距):	7.62mm
Approval (认证):	
Rated voltage (电压):	300V
Rated current (电流):	15A
Wire range (线径):	22-14AWG
Pole number (位数):	02-30P
Screw(螺丝):	M3



B825C-01

Pitch (间距):	8.25mm
Approval (认证):	
Rated voltage (电压):	300V
Rated current (电流):	20A
Wire range (线径):	22-12AWG
Pole number (位数):	02-24P
Screw(螺丝):	M3



B825[C]W-02

Pitch (间距):	8.25mm
Approval (认证):	
Rated voltage (电压):	300V
Rated current (电流):	20A
Wire range (线径):	22-12AWG
Pole number (位数):	02-20P
Screw(螺丝):	M3

Pitch (间距):	19.00mm
Approval (认证):	 UL
Rated voltage (电压):	600V
Rated current (电流):	85A
Wire range (线径):	18-4AWG
Screw(螺丝):	M6



Pitch (间距):	25.00mm
Approval (认证):	
Rated voltage (电压):	600V
Rated current (电流):	150A
Wire range (线径):	8-1/0AWG
Screw(螺丝):	M8
Pole number (位数):	02-12P



Pitch (间距):	25.00mm
Approval (认证):	
Rated voltage (电压):	600V
Rated current (电流):	150A
Wire range (线径):	8-1/0AWG
Screw(螺丝):	M8
Pole number (位数):	02-12P



Pitch (间距):	27.00mm
Approval (认证):	
Rated voltage (电压):	600V
Rated current (电流):	230A
Wire range (线径):	8-4/0AWG
Screw(螺丝):	M8
Pole number (位数):	02-12P



Pitch (间距):	33.00mm
Approval (认证):	
Rated voltage (电压):	600V
Rated current (电流):	230A
Wire range (线径):	8-4/0AWG
Screw(螺丝):	M10
Pole number (位数):	02-12P



间距 Pitch	45.00mm
认证 Approval	
电压 Rated Voltage	600V
电流 Rated Current	380A
线径 Applicable wire	6-3/0AWG
螺丝 Screw	M10
Pole number (位数):	02-12P



Pitch (间距):	60mm
Approval (认证):	
Rated voltage (电压):	1000V
Rated current (电流):	475/620A
Wire range (线径):	350-250 Kcmil
Screw(螺丝):	M16
Pole number (位数):	02-12P



Pitch (间距):	8.50mm
Approval (认证):	
Rated voltage (电压):	300V
Rated current (电流):	10A
Wire range (线径):	1.5mm ²
Screw(螺丝):	M3
Pole number (位数):	02-20P



Pitch (间距):	10.00mm
Approval (认证):	
Rated voltage (电压):	300V
Rated current (电流):	20A
Wire range (线径):	2.5mm ²
Screw(螺丝):	M3.5
Pole number (位数):	02-12P



Pitch (间距):	12.00mm
Approval (认证):	
Rated voltage (电压):	300V
Rated current (电流):	30A
Wire range (线径):	4.0mm ²
Screw(螺丝):	M3.5
Pole number (位数):	02-12P



Pitch (间距):	8.80mm
Approval (认证):	
Rated voltage (电压):	600V 600V
Rated current (电流):	15A
Wire range (线径):	22-14AWG 1.5mm ²
Screw(螺丝):	M3
Pole number (位数):	02-12P



Pitch (间距):	10.50mm
Approval (认证):	
Rated voltage (电压):	600V 600V
Rated current (电流):	20A
Wire range (线径):	22-12AWG 4.0mm ²
Screw(螺丝):	M3.5
Pole number (位数):	02-30P



Pitch (间距):	13.00mm
Approval (认证):	
Rated voltage (电压):	600V 600V
Rated current (电流):	30A
Wire range (线径):	22-10AWG 6.0mm ²
Screw(螺丝):	M4
Pole number (位数):	02-12P



Pitch (间距):	19.00mm
Approval (认证):	
Rated voltage (电压):	600V 600V
Rated current (电流):	65A
Wire range (线径):	18-6AWG 16mm ²
Screw(螺丝):	M6
Pole number (位数):	02-12P



Pitch (间距):	19.00mm
Approval (认证):	
Rated voltage (电压):	600V
Rated current (电流):	65A
Wire range (线径):	18-6AWG
Screw(螺丝):	M6
Pole number (位数):	02-12P



Pitch (间距):	19.00mm
Approval (认证):	
Rated voltage (电压):	600V 600V
Rated current (电流):	85A
Wire range (线径):	18-4AWG 25mm ²
Screw(螺丝):	M6
Pole number (位数):	02-12P



Pitch (间距):	19.00mm
Approval (认证):	
Rated voltage (电压):	600V
Rated current (电流):	85A
Wire range (线径):	18-4AWG
Screw(螺丝):	M6
Pole number (位数):	02-12P



Pitch (间距):	25.00mm
Approval (认证):	
Rated voltage (电压):	600V
Rated current (电流):	150A
Wire range (线径):	8-1/0AWG
Screw(螺丝):	M8
Pole number (位数):	02-12P



Pitch (间距):	25.00mm
Approval (认证):	
Rated voltage (电压):	600V
Rated current (电流):	150A
Wire range (线径):	8-1/0AWG
Screw(螺丝):	M8
Pole number (位数):	02-12P



Pitch (间距):	27.00mm
Approval (认证):	
Rated voltage (电压):	600V
Rated current (电流):	230A
Wire range (线径):	8-4/0AWG
Screw(螺丝):	M8
Pole number (位数):	02-12P



Pitch (间距):	33.00mm
Approval (认证):	
Rated voltage (电压):	600V
Rated current (电流):	230A
Wire range (线径):	8-4/0AWG
Screw(螺丝):	M10
Pole number (位数):	02-12P



Pitch (间距):	45.00mm
Approval (认证):	
Rated voltage (电压):	600V
Rated current (电流):	380A
Wire range (线径):	6-3/0AWG
Screw(螺丝):	M10
Pole number (位数):	02-12P




Pitch (间距):	60.00mm
Approval (认证):	
Rated voltage (电压):	1000V
Rated current (电流):	620A
Wire range (线径):	350-250 Kcmil
Screw(螺丝):	M16
Pole number (位数):	02-12P




Pitch (间距):	8.80mm
Approval (认证):	
Rated voltage (电压):	600V
Rated current (电流):	15A
Wire range (线径):	22-14AWG
Screw(螺丝):	M3
Pole number (位数):	02-12P




Pitch (间距):	10.50mm
Approval (认证):	UL(Applying)
Rated voltage (电压):	600V
Rated current (电流):	20A
Wire range (线径):	22-12AWG
Screw(螺丝):	M3.5
Pole number (位数):	02-12P




Pole number (位数):	02-12P
---------------------	--------




Pole number (位数):	02-12P
---------------------	--------




Pole number (位数):	02-12P
---------------------	--------




Pole number (位数):	02-12P
---------------------	--------




Pole number (位数):	02-12P
---------------------	--------




Pole number (位数):	02-12P
---------------------	--------




Pole number (位数):	02-12P
---------------------	--------




Pole number (位数):	02-12P
---------------------	--------




Pole number (位数):	02-12P
---------------------	--------



Pole number (位数):	02-12P
---------------------	--------



Pole number (位数):	02-12P
---------------------	--------



Pole number (位数):	02-12P
---------------------	--------



Thickness(厚度)	3.50mm
Approval (认证):	VDE(Applying)
Rated voltage (电压):	300V 500V
Rated current (电流):	15A 17.5A
Wire range (线径):	26-14AWG 0.2-1.5mm ²



Thickness(厚度)	10.20mm
Approval (认证):	
Rated voltage (电压):	600V 1000V
Rated current (电流):	60A 57A
Wire range (线径):	20-6AWG 0.5-10mm ² 16mm ² Sol



Thickness (厚度):	6.20mm
Approval (认证):	
Rated voltage (电压):	600V
Wire range (线径):	24-10AWG 0.2-4mm ² 6mm ² Sol



Applicable product (适用产品)	TS1.5, TS1.5-PE
---------------------------	-----------------



Applicable product (适用产品)	TS10, TS10-PE
---------------------------	---------------



Thickness(厚度)	5.20mm
Approval (认证):	
Rated voltage (电压):	600V 800V
Rated current (电流):	20A 24A
Wire range (线径):	26-12AWG 0.2-2.5mm ² 4mm ² Sol



Thickness(厚度)	12.20mm
Approval (认证):	UL(Applying) VDE(Applying)
Rated voltage (电压):	600V 1000V
Rated current (电流):	85A 76A
Wire range (线径):	20-4AWG 0.5-16mm ² 25mm ² Sol



Thickness (厚度):	8.20mm
Approval (认证):	
Rated voltage (电压):	600V
Wire range (线径):	20-8AWG 0.5-6mm ² 10mm ² Sol



Applicable product (适用产品)	TS2.5, TS2.5-PE
---------------------------	-----------------



Applicable product (适用产品)	TS16, TS16-PE
---------------------------	---------------



Thickness(厚度)	6.20mm
Approval (认证):	
Rated voltage (电压):	600V 1000V
Rated current (电流):	30A 32A
Wire range (线径):	24-10AWG 0.2-4mm ² 6mm ² Sol



Thickness(厚度)	3.50mm
Approval (认证):	UL(Applying) VDE(Applying)
Rated voltage (电压):	300V
Wire range (线径):	26-14AWG 0.2-1.5mm ²



Thickness (厚度):	10.20mm
Approval (认证):	
Rated voltage (电压):	600V
Wire range (线径):	20-6AWG 0.5-10mm ² 16mm ² Sol



Applicable product (适用产品)	TS4, TS4-PE
---------------------------	-------------



Thickness (厚度):	3.50mm
Approval (认证):	VDE(Applying)
Rated voltage (电压):	300V 500V
Rated current (电流):	15A 17.5A
Wire range (线径):	26-14AWG 0.2-1.5mm ²



Thickness(厚度)	8.20mm
Approval (认证):	
Rated voltage (电压):	600V 1000V
Rated current (电流):	40A 41A
Wire range (线径):	20-8AWG 0.5-6mm ² 10mm ² Sol



Thickness(厚度)	5.20mm
Approval (认证):	
Rated voltage (电压):	600V
Wire range (线径):	26-12AWG 0.2-2.5mm ² 4mm ² Sol



Thickness (厚度):	12.20mm
Approval (认证):	UL(Applying) VDE(Applying)
Rated voltage (电压):	600V
Wire range (线径):	20-4AWG 0.5-16mm ² 25mm ² Sol



Applicable product (适用产品)	TS6, TS6-PE
---------------------------	-------------



Thickness (厚度):	5.20mm
Approval (认证):	
Rated voltage (电压):	600V 800V
Rated current (电流):	20A 24A
Wire range (线径):	26-12AWG 0.2-2.5mm ² 4mm ² Sol



Thickness (厚度):	6.20mm
Approval (认证):	
Rated voltage (电压):	600V 1000V
Rated current (电流):	30A 32A
Wire range (线径):	24-10AWG 0.2-4mm ² 6mm ² Sol



Thickness (厚度):	5.20mm
Approval (认证):	
Rated voltage (电压):	600V
Wire range (线径):	26-12AWG 0.2-2.5mm ² 4mm ² Sol



Applicable product (适用产品)	TS1.5-TN, TS1.5-TN-PE
---------------------------	-----------------------



Applicable product (适用产品)	TS10-TN, TS10-TN-PE
---------------------------	---------------------



Thickness (厚度):	8.20mm
Approval (认证):	
Rated voltage (电压):	600V 1000V
Rated current (电流):	40A 41A
Wire range (线径):	20-8AWG 0.5-6mm ² 10mm ² Sol



Thickness (厚度):	8.20mm
Approval (认证):	
Rated voltage (电压):	600V 1000V
Rated current (电流):	40A 41A
Wire range (线径):	20-8AWG 0.5-6mm ² 10mm ² Sol



Thickness (厚度):	6.20mm
Approval (认证):	
Rated voltage (电压):	600V
Wire range (线径):	24-10AWG 0.2-4mm ² 6mm ² Sol



Applicable product (适用产品)	TS2.5-TN, TS2.5-TN-PE
---------------------------	-----------------------



Thickness (厚度):	3.50mm
Approval (认证):	VDE(Applying)
Rated voltage (电压):	300V 500V
Rated current (电流):	15A 17.5A
Wire range (线径):	26-14AWG 0.2-1.5mm ²



Thickness (厚度):	3.50mm
Approval (认证):	VDE(Applying)
Rated voltage (电压):	300V
Wire range (线径):	26-14AWG 0.2-1.5mm ²



Thickness (厚度):	10.20mm
Approval (认证):	VDE(Applying)
Rated voltage (电压):	600V 1000V
Rated current (电流):	60A 57A
Wire range (线径):	20-6AWG 0.5-10mm ² 16mm ² Sol



Thickness (厚度):	8.20mm
Approval (认证):	
Rated voltage (电压):	600V
Wire range (线径):	20-8AWG 0.5-6mm ² 10mm ² Sol



Applicable product (适用产品)	TS4-TN, TS4-TN-PE
---------------------------	-------------------



Thickness (厚度):	5.20mm
Approval (认证):	
Rated voltage (电压):	600V 800V
Rated current (电流):	20A 24A
Wire range (线径):	26-12AWG 0.2-2.5mm ² 4mm ² Sol



Thickness (厚度):	5.20mm
Approval (认证):	
Rated voltage (电压):	600V
Wire range (线径):	26-12AWG 0.2-2.5mm ² 4mm ² Sol



Thickness (厚度):	3.50mm
Approval (认证):	VDE(Applying)
Rated voltage (电压):	300V
Wire range (线径):	26-14AWG 0.2-1.5mm ²



Thickness (厚度):	10.20mm
Approval (认证):	VDE(Applying)
Rated voltage (电压):	600V
Wire range (线径):	20-6AWG 0.5-10mm ² 16mm ² Sol



Applicable product (适用产品)	TS6-TN, TS6-TN-PE
---------------------------	-------------------




TS6-QT-PE

Thickness (厚度):	8.20mm
Approval (认证):	
Rated voltage (电压):	600V
Wire range (线径):	20-8AWG 0.5-6mm² 10mm² Sol



TSC6-QT

Applicable product (适用产品)	TS6-QT, TS6-QT-PE
---------------------------	-------------------



TS1.5-2L-PE

Thickness (厚度):	3.50mm
Approval (认证):	VDE(Applying)
Rated voltage (电压):	300V
Wire range (线径):	26-14AWG 0.2-1.5mm ²



TS2.5-2L-PV

Thickness (厚度):	5.20mm
Approval (认证):	VDE(Applying)
Rated voltage (电压):	300V
Rated current (电流):	20A
Wire range (线径):	26-12AWG 0.2-2.5mm² 4mm² Sol




TSC4-2L

Applicable product (适用产品)	TS4-2L, TS4-2L-PE
---------------------------	-------------------



TSC1.5-QT

Applicable product (适用产品)	TS1.5-QT, TS1.5-QT-PE
---------------------------	-----------------------



TS1.5-2L

Thickness (厚度):	3.50mm
Approval (认证):	VDE(Applying)
Rated voltage (电压):	300V
Rated current (电流):	15A
Wire range (线径):	26-14AWG 0.2-1.5mm ²



TS2.5-2L-PE

Thickness (厚度):	5.20mm
Approval (认证):	VDE(Applying)
Rated voltage (电压):	300V
Wire range (线径):	26-12AWG 0.2-2.5mm² 4mm² Sol



TS4-2L-PV

Thickness (厚度):	6.20mm
Approval (认证):	VDE(Applying)
Rated voltage (电压):	300V
Rated current (电流):	30A
Wire range (线径):	24-10AWG 0.2-4mm² 6mm² Sol



ETNS01

Thickness (厚度):	8.00mm
Applicable Din Rail(适用的导轨)	TH35-7.5, TH35-15




TSC2.5-QT

Applicable product (适用产品)	TS2.5-QT, TS2.5-QT-PE
---------------------------	-----------------------




TS2.5-2L

Thickness (厚度):	5.20mm
Approval (认证):	VDE(Applying)
Rated voltage (电压):	300V
Rated current (电流):	20A
Wire range (线径):	26-12AWG 0.2-2.5mm² 4mm² Sol



TS4-2L-PE

Thickness (厚度):	6.20mm
Approval (认证):	VDE(Applying)
Rated voltage (电压):	300V
Wire range (线径):	24-10AWG 0.2-4mm² 6mm² Sol



TSC1.5-2L

Applicable product (适用产品)	TS1.5-2L, TS1.5-2L-PE
---------------------------	-----------------------



ETNS03

Thickness (厚度):	5.15mm
Applicable Din Rail(适用的导轨)	TH35-7.5, TH35-15




TSC4-QT

Applicable product (适用产品)	TS4-QT, TS4-QT-PE
---------------------------	-------------------



TS4-2L

Thickness (厚度):	6.20mm
Approval (认证):	VDE(Applying)
Rated voltage (电压):	300V
Rated current (电流):	30A
Wire range (线径):	24-10AWG 0.2-4mm² 6mm² Sol




TS1.5-2L-PV

Thickness (厚度):	3.50mm
Approval (认证):	VDE(Applying)
Rated voltage (电压):	300V
Rated current (电流):	15A
Wire range (线径):	26-14AWG 0.2-1.5mm ²



TSC2.5-2L

Applicable product (适用产品)	TS2.5-2L, TS2.5-2L-PE
---------------------------	-----------------------



Applicable product (适用产品)	TS2.5-2L, TS2.5-2L-PE
---------------------------	-----------------------



TK2.5

Thickness (厚度):	5.20mm
Approval (认证):	VDE(Applying)
Rated voltage (电压):	600V
Rated current (电流):	20A
Wire range (线径):	26-12AWG 0.2-2.5mm² 4mm² Sol
Scerw (螺丝):	M3



TK6

Thickness (厚度):	8.20mm
Approval (认证):	VDE(Applying)
Rated voltage (电压):	600V
Rated current (电流):	50A
Wire range (线径):	24-8AWG 0.2-6mm² 10mm² Sol
Scerw (螺丝):	M4



TK16

Thickness (厚度):	12.20mm
Approval (认证):	VDE(Applying)
Rated voltage (电压):	600V
Rated current (电流):	100A
Wire range (线径):	16-3AWG 11.5-16mm² 25mm² (rigid)
Scerw (螺丝):	M5



TK4-PE

Thickness (厚度):	6.20mm
Approval (认证):	VDE(Applying)
Rated voltage (电压):	600V
Wire range (线径):	26-12AWG 0.2-4mm² 6mm² Sol
Scerw (螺丝):	M3



TK10-PE

Thickness (厚度):	10.20mm
Approval (认证):	VDE(Applying)
Rated voltage (电压):	600V
Wire range (线径):	20-6AWG 0.5-10mm² 16mm² Sol
Scerw (螺丝):	M4



TK2.5-T

Thickness (厚度):	5.20mm
Approval (认证):	VDE(Applying)
Rated voltage (电压):	600V
Rated current (电流):	20A
Wire range (线径):	26-12AWG 0.2-2.5mm² 4mm² Sol
Scerw (螺丝):	M2.5



TK6-T

Thickness (厚度):	8.20mm
Approval (认证):	VDE(Applying)
Rated voltage (电压):	600V
Rated current (电流):	50A
Wire range (线径):	24-8AWG 0.2-6mm² 10mm² Sol
Scerw (螺丝):	M4



TK35

Thickness (厚度):	16.00mm
Approval (认证):	VDE(Applying)
Rated voltage (电压):	600V
Rated current (电流):	150A
Wire range (线径):	14-1/0AWG 1.5-35mm² 50mm² (rigid)
Scerw (螺丝):	M6



TK4-T-PE

Thickness (厚度):	6.20mm
Approval (认证):	VDE(Applying)
Rated voltage (电压):	600V
Wire range (线径):	26-10AWG 0.2-4mm² 6mm² Sol
Scerw (螺丝):	M3



TK10-T-PE

Thickness (厚度):	10.20mm
Approval (认证):	VDE(Applying)
Rated voltage (电压):	600V
Wire range (线径):	20-6AWG 0.5-10mm² 16mm² Sol
Scerw (螺丝):	M4



TK4

Thickness (厚度):	6.20mm
Approval (认证):	VDE(Applying)
Rated voltage (电压):	600V
Rated current (电流):	30A
Wire range (线径):	26-10AWG 0.2-4mm² 6mm² Sol
Scerw (螺丝):	M3



TK10

Thickness (厚度):	10.20mm
Approval (认证):	VDE(Applying)
Rated voltage (电压):	600V
Rated current (电流):	65A
Wire range (线径):	26-6AWG 0.5-10mm² 16mm² Sol
Scerw (螺丝):	M4



TK2.5-PE

Thickness (厚度):	5.20mm
Approval (认证):	VDE(Applying)
Rated voltage (电压):	600V
Wire range (线径):	26-12AWG 0.2-2.5mm² 4mm² Sol
Scerw (螺丝):	M3



TK6-PE

Thickness (厚度):	8.20mm
Approval (认证):	VDE(Applying)
Rated voltage (电压):	600V
Wire range (线径):	24-8AWG 0.2-6mm² 10mm² Sol
Scerw (螺丝):	M4



TK16-PE

Thickness (厚度):	12.20mm
Approval (认证):	VDE(Applying)
Rated voltage (电压):	600V
Wire range (线径):	16-3AWG 1.5-16mm² 25mm² (rigid)
Scerw (螺丝):	M5



TK4-T

Thickness (厚度):	6.20mm
Approval (认证):	VDE(Applying)
Rated voltage (电压):	600V
Rated current (电流):	30A
Wire range (线径):	26-10AWG 0.2-4mm² 6mm² Sol
Scerw (螺丝):	M3



TK10-T

Thickness (厚度):	10.20mm
Approval (认证):	VDE(Applying)
Rated voltage (电压):	600V
Rated current (电流):	65A
Wire range (线径):	20-6AWG 0.5-10mm² 16mm² Sol
Scerw (螺丝):	M4



TK2.5-T-PE

Thickness (厚度):	5.20mm
Approval (认证):	VDE(Applying)
Rated voltage (电压):	600V
Wire range (线径):	26-12AWG 0.2-2.5mm² 4mm² Sol
Scerw (螺丝):	M2.5



TK6-T-PE

Thickness (厚度):	8.20mm
Approval (认证):	VDE(Applying)
Rated voltage (电压):	600V
Wire range (线径):	24-8AWG 0.2-6mm² 10mm² Sol
Scerw (螺丝):	M4



TK35-PE

Thickness (厚度):	16.00mm
Approval (认证):	VDE(Applying)
Rated voltage (电压):	600V
Wire range (线径):	14-1/0AWG 1.5-35mm² 50mm² (rigid)
Scerw (螺丝):	M6



Applicable product (适用产品)
TK2.5, TK2.5-PE
TK4, TK4-PE
TK6, TK6-PE
TK10, TK10-PE



Applicable product (适用产品)
TK2.5-T, TK2.5-T-PE
TK4-T, TK4-T-PE



Applicable product (适用产品)
TK6-T, TK6-T-PE



Applicable product (适用产品)
TK10-T, TK10-T-PE



Applicable product (适用产品)
TK16, TK16-PE



Thickness (厚度): 5.20mm
Approval (认证):
Rated voltage (电压): 600V 1000V
Rated current (电流): 20A 24A
Wire range (线径): 26-12AWG 0.2-2.5mm ² 4mm ² Sol
Scerw (螺丝): M3



Thickness (厚度): 6.20mm
Approval (认证):
Rated voltage (电压): 600V 1000V
Rated current (电流): 30A 32A
Wire range (线径): 26-10AWG 0.2-4mm ² 6mm ² Sol
Scerw (螺丝): M3



Thickness (厚度): 8.20mm
Approval (认证):
Rated voltage (电压): 600V 1000V
Rated current (电流): 50A 41A
Wire range (线径): 24-8AWG 0.2-6mm ² 10mm ² Sol
Scerw (螺丝): M4



Thickness (厚度): 10.20mm
Approval (认证):
Rated voltage (电压): 600V 1000V
Rated current (电流): 65A 57A
Wire range (线径): 20-6AWG 0.5-10mm ² 16mm ² Sol
Scerw (螺丝): M4



Thickness (厚度): 5.20mm
Approval (认证):
Rated voltage (电压): 600V
Rated current (电流): 26-12AWG 0.2-2.5mm ² 4mm ² Sol
Scerw (螺丝): M3



Thickness (厚度): 6.20mm
Approval (认证):
Rated voltage (电压): 600V
Rated current (电流): 26-10AWG 0.2-4mm ² 6mm ² Sol
Scerw (螺丝): M3



Thickness (厚度): 8.20mm
Approval (认证):
Rated voltage (电压): 600V
Rated current (电流): 24-8AWG 0.2-6mm ² 10mm ² Sol
Scerw (螺丝): M4



Thickness (厚度): 10.20mm
Approval (认证):
Rated voltage (电压): 600V
Rated current (电流): 20-6AWG 0.5-10mm ² 16mm ² Sol
Scerw (螺丝): M4



Applicable product (适用产品)
TK2.5-TN, TK2.5-TN-PE
TK4-TN, TK4-TN-PE



Applicable product (适用产品)
TK6-TN, TK6-TN-PE
TK10-TN, TK10-TN-PE



Thickness (厚度): 5.20mm
Approval (认证):
Rated voltage (电压): 600V 1000V
Rated current (电流): 20A 24A
Wire range (线径): 26-12AWG 0.2-2.5mm ² 4mm ² Sol
Scerw (螺丝): M3



Thickness (厚度): 6.20mm
Approval (认证):
Rated voltage (电压): 600V 1000V
Rated current (电流): 30A 32A
Wire range (线径): 26-10AWG 0.2-4mm ² 6mm ² Sol
Scerw (螺丝): M3



Thickness (厚度): 5.20mm
Approval (认证):
Rated voltage (电压): 600V
Rated current (电流): 26-12AWG 0.2-2.5mm ² 4mm ² Sol
Scerw (螺丝): M3



Thickness (厚度): 6.20mm
Approval (认证):
Rated voltage (电压): 600V
Rated current (电流): 26-10AWG 0.2-4mm ² 6mm ² Sol
Scerw (螺丝): M3



Applicable product (适用产品)
TK2.5-QT, TK2.5-QT-PE
TK4-QT, TK4-QT-PE



Thickness (厚度): 5.20mm
Approval (认证): VDE(Applying)
Rated voltage (电压): 600V 800V
Rated current (电流): 20A 24A/28A(4mm ²)
Wire range (线径): 26-12AWG 0.2-2.5mm ² 4mm ² Sol
Scerw (螺丝): M3



Thickness (厚度): 6.20mm
Approval (认证): VDE(Applying)
Rated voltage (电压): 600V 1000V
Rated current (电流): 30A 32A
Wire range (线径): 26-10AWG 0.2-4mm ² 6mm ² Sol
Scerw (螺丝): M3



Thickness (厚度): 5.20mm
Approval (认证): VDE(Applying)
Rated voltage (电压): 600V 800V
Rated current (电流): 20A 24A/28A(4mm ²)
Wire range (线径): 26-12AWG 0.2-2.5mm ² 4mm ² Sol
Scerw (螺丝): M3



Thickness (厚度): 6.20mm
Approval (认证): VDE(Applying)
Rated voltage (电压): 600V 1000V
Rated current (电流): 30A 32A
Wire range (线径): 26-10AWG 0.2-4mm ² 6mm ² Sol
Scerw (螺丝): M3



Applicable product (适用产品)
TK2.5-2L, TK2.5-2L-PE
TK4-2L, TK4-2L-PE



Thickness (厚度): 8.00mm
Scerw (螺丝): M3
Applicable Din Rail (适用的导轨)
TH35-7.5, TH35-15



Pitch (间距): 3.50mm
Applicable product (适用产品)
TS1.5 Series



Pitch (间距): 8.20mm
Applicable product (适用产品)
TS6 Series



Pitch (间距): 10.20mm
Applicable product (适用产品)
TS10 Series



Pitch (间距): 12.20mm
Applicable product (适用产品)
TS16 Series



Pitch (间距): 5.20mm
Applicable product (适用产品)
TK2.5 Series
TS2.5 Series



Pitch (间距): 6.20mm
Applicable product (适用产品)
TK4 Series
TS4 Series



Pitch (间距): 8.20mm
Applicable product (适用产品)
TK6 Series



Pitch (间距): 10.20mm
Applicable product (适用产品)
TK10 Series



Pitch (间距): 12.20mm
Applicable product (适用产品)
TK16 Series



Pitch (间距): 16.00mm
Applicable product (适用产品)
TK35 Series



Pitch (间距):	3.50mm
Applicable product (适用产品)	TS1.5 Series



Pitch (间距):	5.20mm
Applicable product (适用产品)	TK2.5 Series TS2.5 Series



Pitch (间距):	6.20mm
Applicable product (适用产品)	TK4 Series TS4 Series



Pitch (间距):	8.20mm
Applicable product (适用产品)	TK6 Series TS6 Series



Pitch (间距):	10.20mm
Applicable product (适用产品)	TK10 Series TS10 Series



Pitch (间距):	12.20mm
Applicable product (适用产品)	TK16 Series TS16 Series



Pitch (间距):	16.00mm
Applicable product (适用产品)	TK35 Series



Pitch (间距):	3.50mm
Applicable product (适用产品)	TS1.5 Series



Pitch (间距):	5.20mm
Applicable product (适用产品)	TS2.5 Series



Pitch (间距):	6.20mm
Applicable product (适用产品)	TS4 Series



Pitch (间距):	8.20mm
Applicable product (适用产品)	TS6 Series




Pitch (间距):	10.20mm
Applicable product (适用产品)	TS10 Series





Pitch (间距):	12.20mm
Applicable product (适用产品)	TS16 Series





Applicable Din Rail(适用的导轨)	TH35-7.5
















Pitch (间距):	5.00mm
Pole number (位数):	02-10P




Pitch (间距):	5.00mm
Pole number (位数):	02-10P




Pitch (间距):	7.50mm
Pole number (位数):	02-03P




Pitch (间距):	10.20mm
Pole number (位数):	02-10P




Material (材质):	Brass
Plated (镀层):	Tin




Material (材质):	Brass
Plated (镀层):	Tin




Material (材质):	Brass
Plated (镀层):	Tin




Material (材质):	Brass
Plated (镀层):	Tin




Material (材质):	Brass
Plated (镀层):	Tin




Material (材质):	Brass
Plated (镀层):	Tin




Material (材质):	Brass
Plated (镀层):	Tin




Material (材质):	Brass
Plated (镀层):	Tin




Material (材质):	Brass
Plated (镀层):	Tin




Material (材质):	Solder Pin: Brass
	Rivet Nut: Stainless
	Screw: Steel
Plated (镀层):	Solder Pin: Tin
	Screw: Zn-Ni




Material (材质):	Solder Pin: Brass
	Nut: Steel
Plated (镀层):	Solder Pin: Tin
	Nut: Zn-Ni/Tin(A125)




Material (材质):	Solder Pin: Brass
	Nut: Steel
Plated (镀层):	Solder Pin: Tin
	Nut: Zn-Ni/Tin(A125)




Material (材质):	Solder Pin: Brass
	Rivet Nut: Stainless
	Screw: Steel
Plated (镀层):	Solder Pin: Tin
	Screw: Zn-Ni



Material (材质):	Solder Pin: Brass
	Rivet Nut: Stainless
	Screw: Steel
Plated (镀层):	Solder Pin: Tin
	Screw: Zn-Ni



Material (材质):	Solder Pin: Brass
	Rivet Nut: Stainless
	Screw: Steel
Plated (镀层):	Solder Pin: Tin
	Screw: Zn-Ni



Customized products

At Tianli, we are continually developing various kinds of products to provide more choices for our customers.

Tianli can also offer the manufacture of special products according to a customer's own design. We have a large Design Department, equipped with the latest design aids, and we also have our own assembly and moulding machinery in-house. Based on these, we can maximumly reduce our development cost.

Because we deem quality as the most important service we can offer to our customers, both the present and future clients can be assured of complete satisfaction.

Terminal Project




Plastic Molding / Injection



Stamping Project



Interface Module PCBM-72

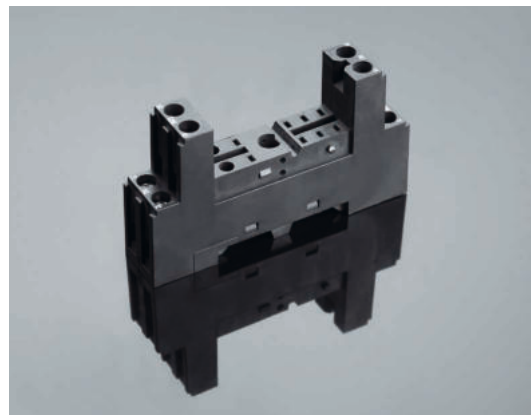

Memo

[illegible]

TIELEE[®] 天立电机

Tianli Electrical Machinery (Ningbo) Co., Ltd

天立电机（宁波）有限公司

地址：中国浙江省宁波杭州湾新区庵东工业园区纬三路 138 号

邮编：315327

国内销售：

电话：0574-6347-9600, 6347-9618

传真：0574-6389-7084, 6347-9611

Web: www.tielee.com

深圳办事处

地址：深圳市宝安区松岗街道联投东方 PARK 9 座 25C

电话：0755-8612-9295

传真：0755-8612-9295

Web: www.tielee.com

Tianli Electrical Machinery (Ningbo) Co., Ltd

ADD: 138, Weisan Rd., Andong Development Zone, Hangzhou Bay Area,
Ningbo, Zhejiang, 315327 China

Export Department:

TEL: +86-574-6347-9600, 6389-6436

FAX: +86-574-6389-7084, 6347-9611

Web: www.tielee.com

Shenzhen Office

ADD: 25C, Building A, Liantou East Park, Songgang Street,
Baoan District, Shenzhen, China

TEL: +86-755-8612-9295

FAX: +86-755-8612-9295

Web: www.tielee.com