




1. UL:
Rating:300V, 20A;
Insulation Withstands Voltage:AC1600V/MIN;
Suitable Electric Wire:26AWG~12AWG
2. IEC:
Rating:400V, 20A;
Rate Impulse Voltage:6000V;
Insulation Resistance:500M Ω or more at DC500V;
Contact Resistance: $\leq 5\text{m}\Omega$
Material Group: I ;
Pollution Degree:3;
Overvoltage Category:III;
Suitable Electric Wire:0.2mm²~2.5mm²&4mm² (SOL)
3. Using Temperature Range:-40℃~+115℃;
4. Strip length:8~10mm
5. RoHS compliance;

Color: M19:Grey
 L01:Blue
 R03:Red
 K:Black

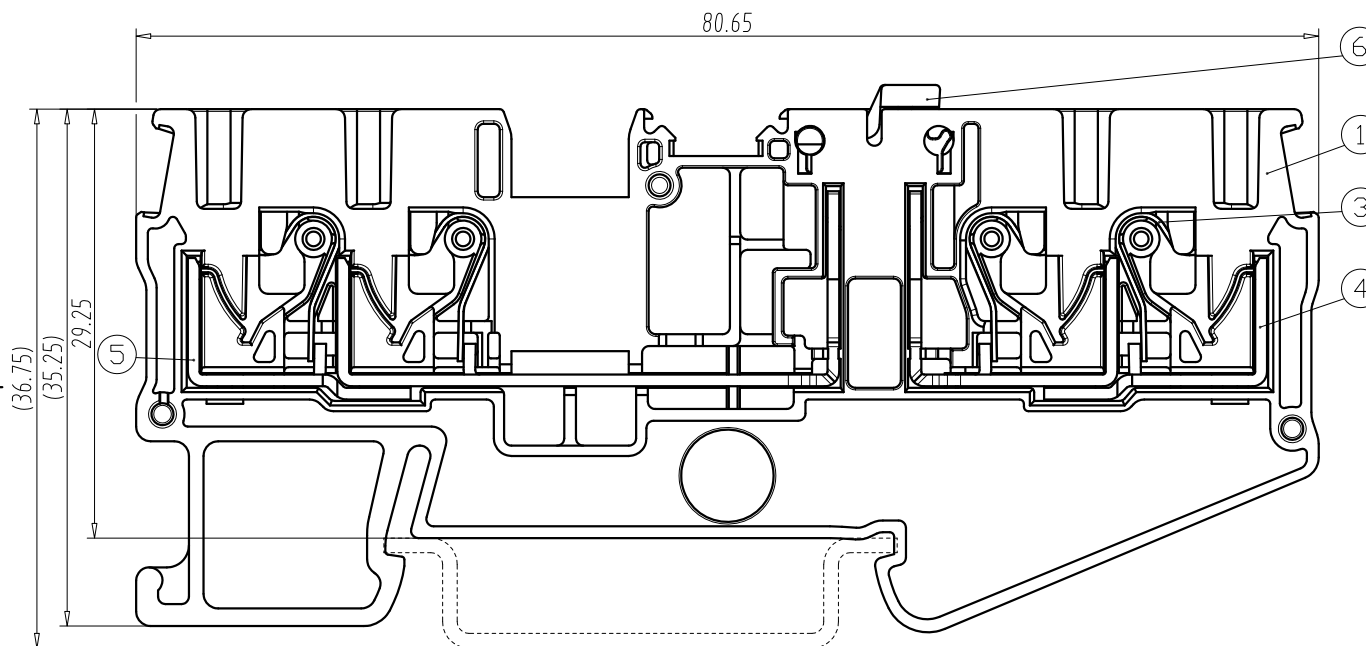

6	TSMT-01(X)	1	/	/
5	CURRENT CARRIER 04	1	H-Copper Alloy	Tin Plated
4	CURRENT CARRIER 05	1	H-Copper Alloy	Tin Plated
3	SPRING	4	Stainless steel	/
2	LEVER	4	PBT	UL94 V-0
1	HOUSING	1	PA66	UL94 V-0
ITEM	NAME OF PART	Q'TY	MATERIAL	NOTE

DWG.	LF	DATE	2024.07.30	UNITS	MM	SHEET/OF	1/1
CHK.		DATE		SCALE	2 : 1	A4	
APP.		DATE		NAME	TS2.5-QT-MT(X)		
 TIANLI ELECTRICAL MACHINERY(NINGBO)CO. LTD.				NAME			
				DWGNO.	TLDW-TS25QTMT(X)		

Total Pitch Tolerances in mm									Nominal dimension range in mm								
over 0 to 30	over 30 to 53	over 53 to 70	over 70 to 90	over 90 to 115	over 115 to 150	over 150 to 200	over 200 to 250	over 250 to 320	over 0 to 30	over 30 to 53	over 53 to 70	over 70 to 90	over 90 to 115	over 115 to 150	over 150 to 200	over 200 to 250	over 250 to 320
±0.20	±0.25	±0.3	±0.35	±0.44	±0.55	±0.70	±0.85	±1.00	±0.25	±0.30	±0.35	±0.44	±0.55	±0.70	±0.80	±0.90	±1.20