


REVISION RECORD				
REV	ECO	DESCRIPTION	DRFT	DATE
△		增加限位结构	CW	05/18/09'

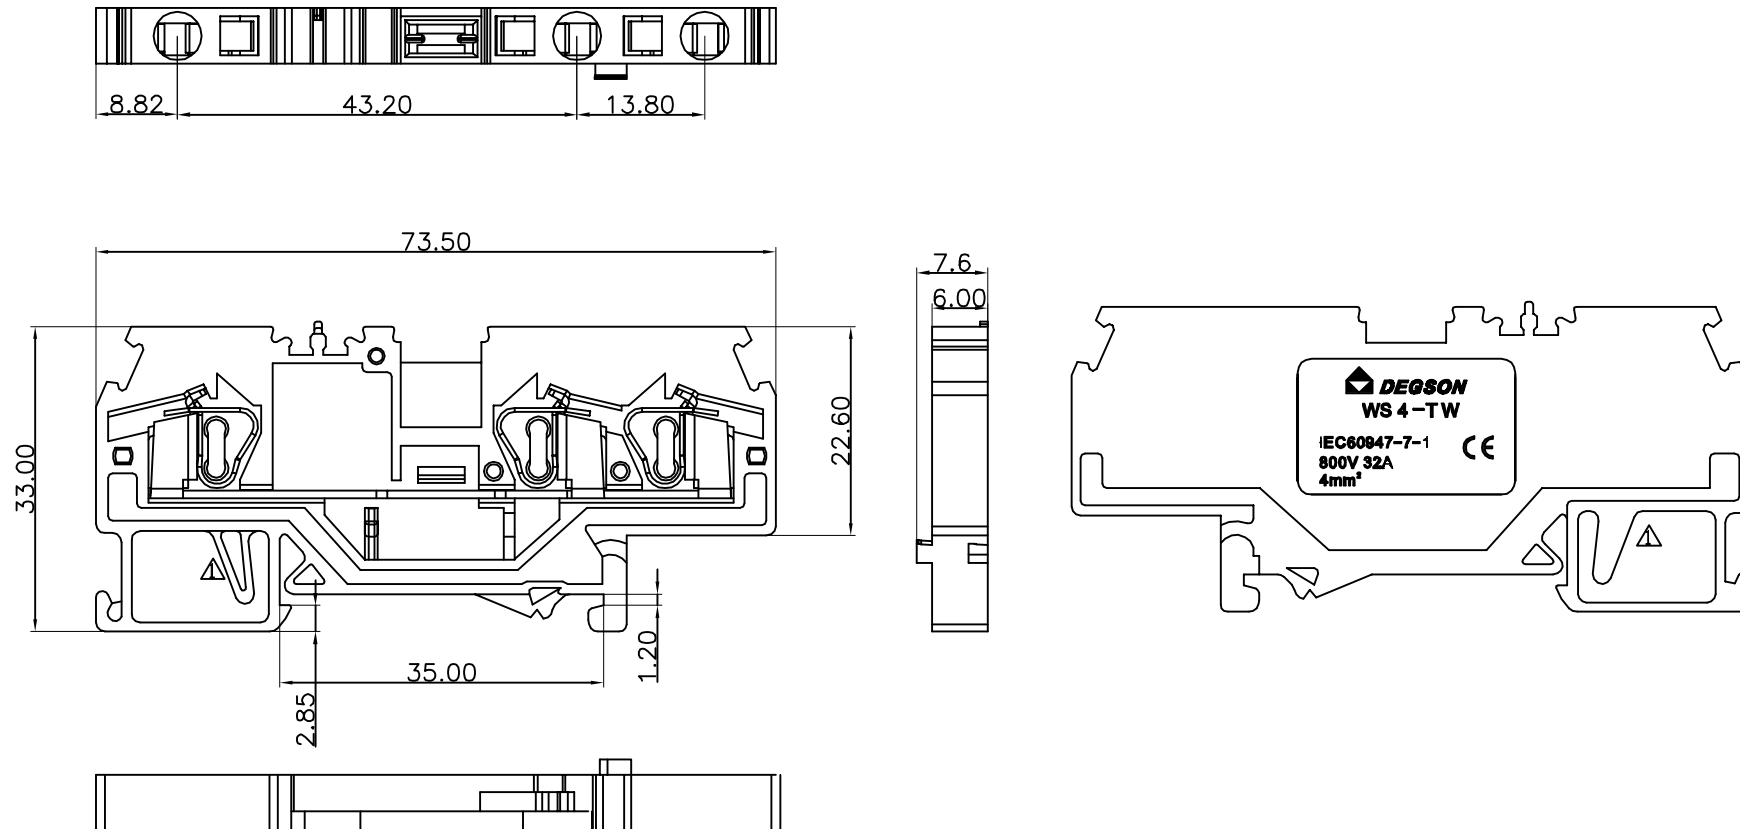

Notes:

- Rated voltage/current:UL 1059 600V/20A
IEC 800V/32A
- Operation temperatures:-40℃~+105℃
- Withstanding Voltage:AC3000V/1min
- Insulation Resistance:5000MΩ/DC1000V
- Wire Range:28~12AWG, 4.0mm²
- Undimensioned Tolerances:

Pitch range in mm		Nominal dimension range in mm						
to	over	to	over	to	over	to	over	
6	10	10	24	30	60	100	150	
±0.10	±0.15	±0.25	±0.2	±0.3	±0.5	±0.7	±1.0	0.05/10

3	WS4-TW Carrier	6131B00010 (H)	1	copper	Sn plated
2	WS4 Clamp	X000000600 (H)	3	Stainless steel	
1	WS4-TW Housing	6131A0Y01A (H)	1	PA66	UL94V-0
ITEM	NAME OF PART	NO. OF PART	Q'TY	MATERIAL	NOTES
DIMENSIONAL LIST	← INCH →	DFTD LINDA	DATE 02/14/08'	宁波高正电子有限公司 DEGSON ELECTRONICS CO., LTD NAME WS4-TW-01P-1Y-00A (H) DRAWING NO. WS4-TW-E01 SIZE A3 REV T1 05/18/09 DO NOT SCALE DRAWING SHEET 1 OF	
	TOLERANCES EXCEPT AS NOTED	CHKD	DATE		
	MATERIAL :	MPO	DATE		
	APPLY	DATE			
MM	±	MATERIAL :			
.0 ±	±	G. E. :			
.00 ±	±	FINISH :			
.000 ±	±	SCALE : 1:1			
ANGLES ± 1°	THIRD ANGLE PROJECTION				