

REV.	DESCRIPTION	DRAWN	DATE
1	INITIAL RELEASE	TIM	2016/08/30
2	CHANGE P/N	FROS	2016/10/11


SPECIFICATION:

1. ELECTRICAL
 - 1.1 Current Rating: 0.5A per pin
 - 1.2 Voltage Rating: 30V AC/DC
 - 1.3 Contact Resistance: 40m Ω
 - 1.4 Insulation Resistance: 1000M Ω
 - 1.5 Dielectric Withstanding Voltage: 300VAC
2. MECHANICAL
 - 2.1 Durability: 100 Cycle
3. ENVIRONMENTAL
 - 3.1 Operating temperature range: -40 $^{\circ}$ C~+85 $^{\circ}$ C
 - 3.2 Storage temperature range: -40 $^{\circ}$ C~+85 $^{\circ}$ C


5	LEAF SPRING	Stainless Steel	
4	CAGE	Copper Alloy 0.25t	
3	INSERT	LCP & PA9T+30%GF, UL94V-0, Black	
2	CONTACT	Phosphor Bronze 0.2t, Gold plating over Nickel	
1	HOUSING	LCP, UL94V-0, Black	
NO. PART NAME		DESCRIPTION	
UNLESS OTHERWISE SPECIFIED TOLERANCE			
UNIT:	DECIMAL	LINEAR	ANGLES
	mm	X. \pm 0.50	\pm 5 $^{\circ}$
		X.X \pm 0.25	\pm 3 $^{\circ}$
		X.XX \pm 0.12	\pm 1 $^{\circ}$
DRAWN Tim 2016/08/30			
CHECKED Fros 2016/08/30			
APPROVED Ken 2016/08/30			
SCALE 4/5 SHEET 1/2 SIZE A4			
DRAWN NAME: SFP Cage With Connector 2x6 Press Fit Type		WWW.ATTEND.COM.TW	
PRODUCT NO.	223A-2603		
FILE NAME	223A-2603_B_2		





REV.	DESCRIPTION	DRAWN	DATE
	SEE SHEET ONE		

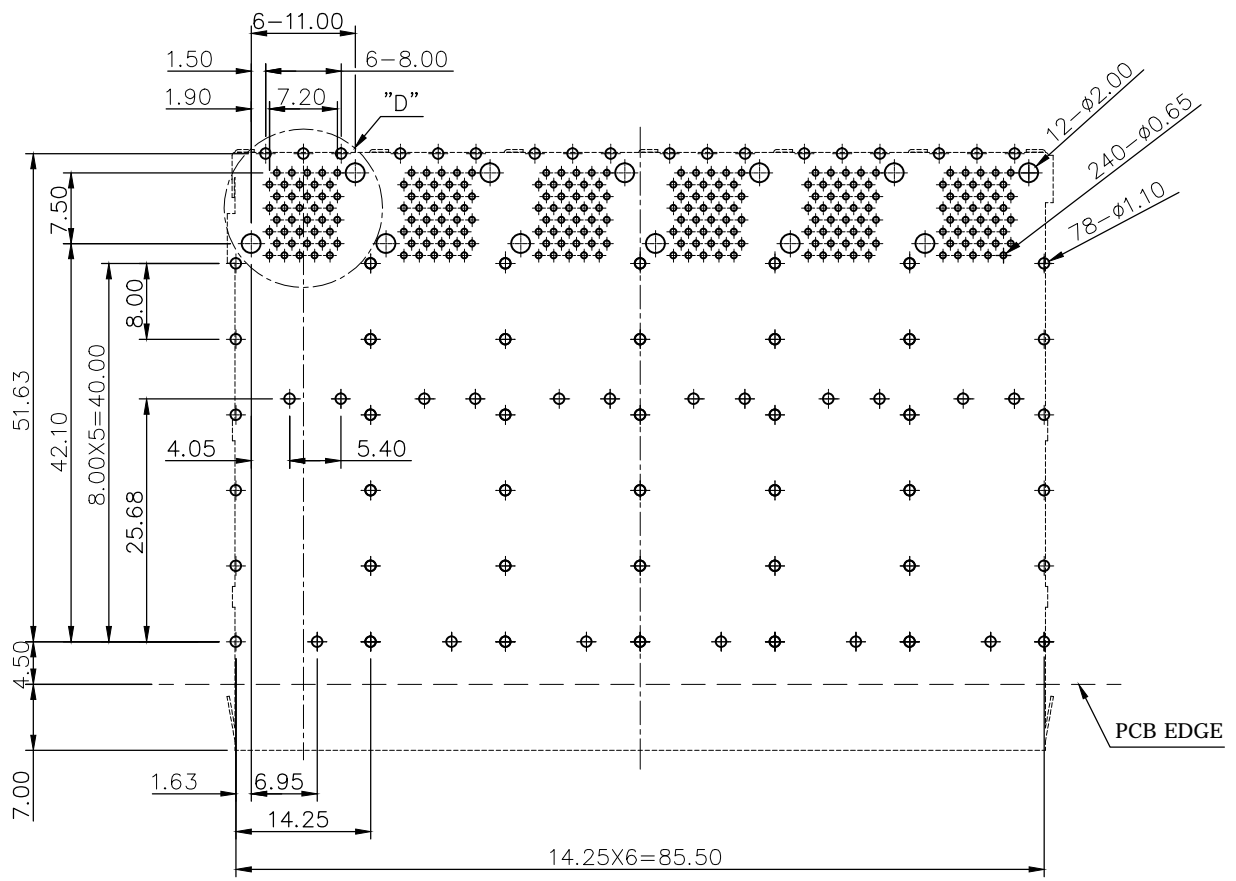

RECOMMENDED LAYOUT (TOP VIEW)
GENERAL TOLERANCE: ±0.05mm

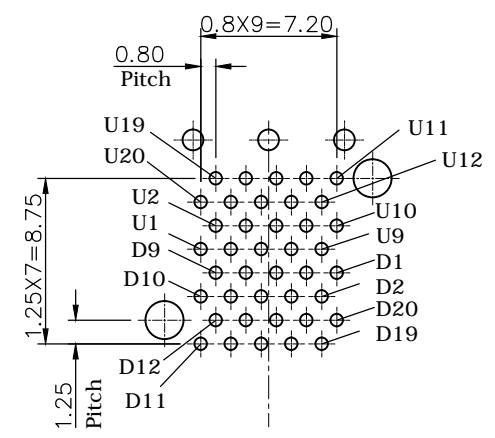

Detail D
Scale 2.5/1

UNLESS OTHERWISE SPECIFIED TOLERANCE				 WWW.ATTEND.COM.TW			
UNIT:	DECIMAL	LINEAR	ANGLES				
mm	X.	±0.50	±5°				
	X.X	±0.25	±3°				
	X.XX	±0.12	±1°				
DRAWN	Tim	2016/08/30	DRAWN NAME:				
CHECKED	Fros	2016/08/30	SFP Cage With Connector 2x6 Press Fit Type				
APPROVED	Ken	2016/08/30	PRODUCT NO.	223A-261D	2		
	SCALE	SHEET	SIZE	FILE NAME	223A-261D_B_1		
	5/4	2/2	A4		2		