


MMBTSA1774E

PNP Silicon Epitaxial Planar Transistor

General purpose transistor




1.Base 2.Emitter 3.Collector
SOT-523 Plastic Package

Absolute Maximum Ratings ($T_a = 25^\circ\text{C}$)

Parameter	Symbol	Value	Unit
Collector Base Voltage	$-V_{CBO}$	60	V
Collector Emitter Voltage	$-V_{CEO}$	50	V
Emitter Base Voltage	$-V_{EBO}$	6	V
Collector Current	$-I_C$	150	mA
Power Dissipation	P_{tot}	150	mW
Junction Temperature	T_j	150	$^\circ\text{C}$
Storage Temperature Range	T_{stg}	- 55 to + 150	$^\circ\text{C}$

Characteristics at $T_a = 25^\circ\text{C}$

Parameter	Symbol	Min.	Typ.	Max.	Unit
DC Current Gain at $-V_{CE} = 6\text{ V}$, $-I_C = 1\text{ mA}$ Current Gain Group	Q h_{FE}	120	-	270	-
	R h_{FE}	180	-	390	-
	S h_{FE}	270	-	560	-
Collector Base Cutoff Current at $-V_{CB} = 60\text{ V}$	$-I_{CBO}$	-	-	100	nA
Emitter Base Cutoff Current at $-V_{EB} = 6\text{ V}$	$-I_{EBO}$	-	-	100	nA
Collector Base Breakdown Voltage at $-I_C = 50\ \mu\text{A}$	$-V_{(BR)CBO}$	60	-	-	V
Collector Emitter Breakdown Voltage at $-I_C = 1\text{ mA}$	$-V_{(BR)CEO}$	50	-	-	V
Emitter Base Breakdown Voltage at $-I_E = 50\ \mu\text{A}$	$-V_{(BR)EBO}$	6	-	-	V
Collector Emitter Saturation Voltage at $-I_C = 50\text{ mA}$, $-I_B = 5\text{ mA}$	$-V_{CE(sat)}$	-	-	0.5	V
Collector Output Capacitance at $-V_{CB} = 12\text{ V}$, $f = 1\text{ MHz}$	C_{ob}	-	-	5	pF
Transition Frequency at $-V_{CE} = 12\text{ V}$, $I_E = 2\text{ mA}$, $f = 30\text{ MHz}$	f_T	-	140	-	MHz



SEMTECH ELECTRONICS LTD.
Subsidiary of Sino-Tech International (BVI) Limited



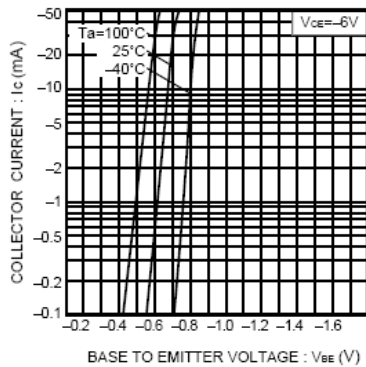


Fig.1 Grounded emitter propagation characteristics

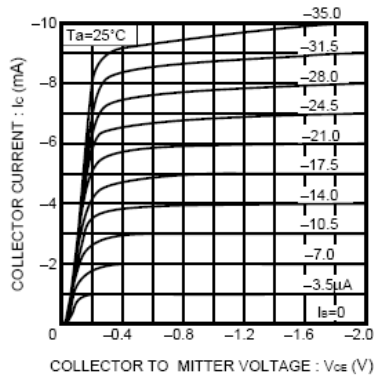


Fig.2 Grounded emitter output characteristics (I)

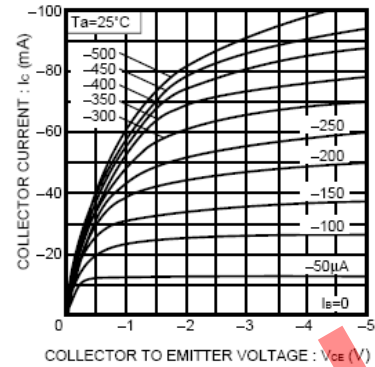


Fig.3 Grounded emitter output characteristics (II)

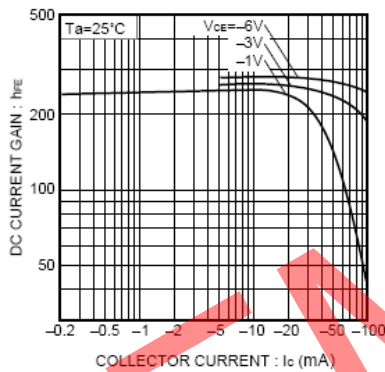


Fig.4 DC current gain vs. collector current (I)

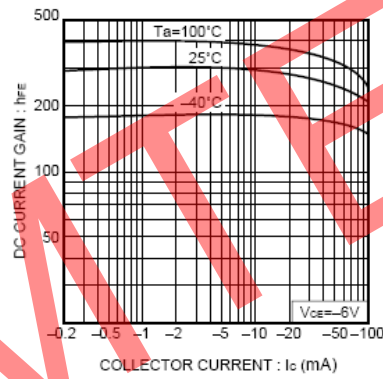


Fig.5 DC current gain vs. collector current (II)

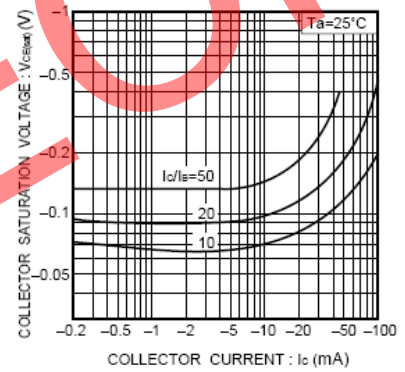


Fig.6 Collector-emitter saturation voltage vs. collector current (I)


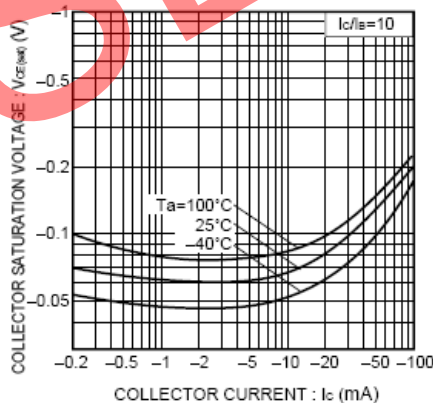


Fig.7 Collector-emitter saturation voltage vs. collector current (II)



SEMTECH ELECTRONICS LTD.
Subsidiary of Sino-Tech International (BVI) Limited

