
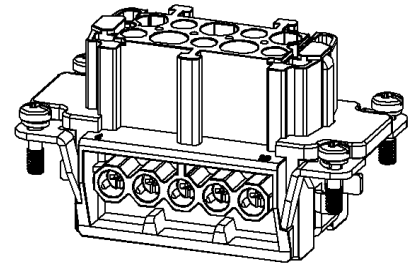



## HE Series, Screw connection, 10 pin, Female insert

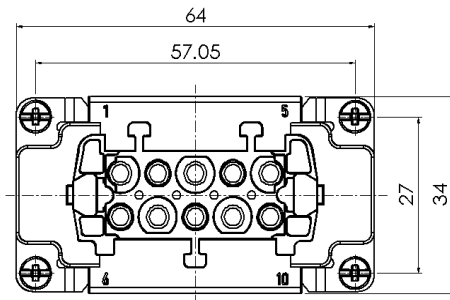

Typecode     HE-010-F  
ID                1 007 03 0000026

### Technical Data

#### Product Properties

|                                     |                                            |
|-------------------------------------|--------------------------------------------|
| Series                              | HE                                         |
| Mating with                         | H10B                                       |
| Connection mode                     | Screw connection                           |
| Gender                              | Female                                     |
| Rated voltage                       | 500 V                                      |
| Rated current                       | 16 A                                       |
| Rated impulse voltage               | 6 kV                                       |
| Number of pins                      | 10                                         |
| Core cross-section/Clamping ability | 1.0~ 2.5 mm <sup>2</sup> / 18 AWG ~ 14 AWG |
| Grounding conductor                 | Yes                                        |
| Pollution degree                    | 3                                          |
| Insulation resistance               | ≥10 <sup>10</sup> Ω                        |
| Temperature range                   | -40 °C ~ +125 °C                           |
| Standard                            | EN 60664-1, IEC 61984                      |

#### Insert

|          |                 |
|----------|-----------------|
| Material | PC              |
| Colour   | Gray (RAL 7032) |

#### Commercial data

|                   |          |
|-------------------|----------|
| Weight            | 0.067 kg |
| Packaging unit    | 5 pcs    |
| Country of origin | CN       |

### Features

- High quality engineering plastics
- Screw connection
- ≥500 Mating cycles
- Approval: CE, UL
- RoHS-compliant

\*这里所列的是设计数据，有关产品的变更不在此做说明，未尽事宜请联系客服。用户有责任验证功能、符合适用的法律和指令以及在特定应用中的电气安全。