


## Size 10B Bulkhead mounted housing

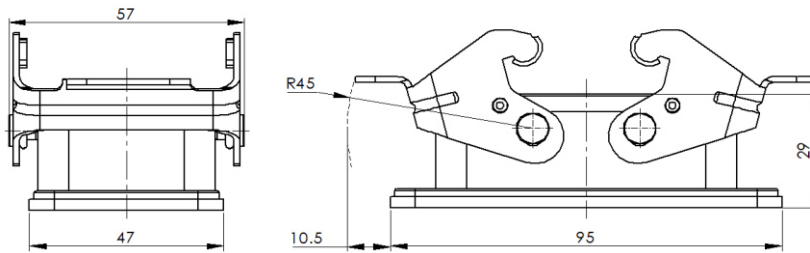

Typecode H10B-OM-2L  
ID 1 007 01 0000286

### Technical Data

| Product Properties      |                          |
|-------------------------|--------------------------|
| Series                  | Size 10B                 |
| Mating with             | HE-010, HEE-018, HDD-042 |
| Housing type            | Bulkhead mounted housing |
| Cable outlets direction | Vertical, bottom opening |
| Locking type            | Double locking lever     |
| Installation mode       | Panel mount              |
| Protection Class        | IP65                     |
| Impact strength         | IK08                     |
| Temperature range       | -40 °C ... 125 °C        |
| Standard                | DIN EN 175301-801        |

### Insert

|                  |                            |
|------------------|----------------------------|
| Housing material | Die-cast aluminum          |
| Color            | Gray (RAL 7037)            |
| Latch            | Metal, surface galvanizing |
| Seal             | NBR, black                 |


### Commercial data

|                   |       |
|-------------------|-------|
| Weight            | 102 g |
| Packaging unit    | 1 pc  |
| Country of origin | CN    |

### Features

- Die casting of aluminum
- All metal buckle
- Bottom fully open wire opening
- Surface fixed installation
- NBR, black
- Resistant to salt spray
- Approval: UL94-V0
- RoHS-compliant
- Applicable to surface high-density installation

### Mounting-hole Size

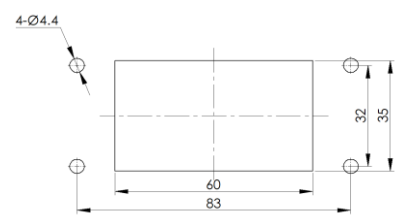

\*The design data are listed here, and the changes to the product are not described here. For unfinished matters, please contact customer service. It is the user's responsibility to verify functionality, compliance with applicable laws and instructions, and electrical safety in specific applications.