


SPECIFICATION FOR APPROVAL

REF :





PAGE: 1

PROD. NAME	SHIELDED SMD POWER INDUCTOR	ABC'S DWG NO. ABC'S ITEM NO.	SU1030□□□□L□
------------	--------------------------------	---------------------------------	--------------

. CONFIGURATION & DIMENSIONS :




- A : 10.00 ±0.30 m/m
- B : 10.00 ±0.30 m/m
- C : 2.80 ±0.30 m/m
- D : 3.00 typ. m/m
- E : 4.00 typ. m/m
- F : 8.20 typ. m/m
- G : 4.20 ref. m/m
- H : 8.20 ref. m/m
- I : 1.40 ref. m/m

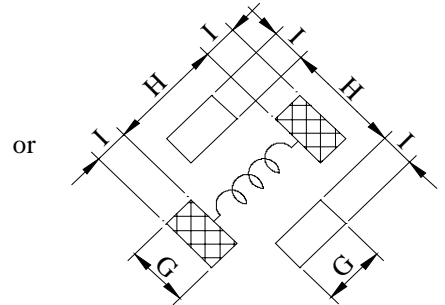

(PCB Pattern)

. SCHEMATIC DIAGRAM :




. MATERIALS :

- a . Core : Ferrite DR core
- b . Core : Ferrite RI core
- c . Wire : Enamelled copper wire (Class F)
- d . Adhesive : Epoxy resin
- e . Terminal : Ag/Ni/Sn
- f . Remark : Lead content 200ppm max.
include ferrite

Peak Temp : 260 max.
Max time above 230 : 50sec max.
Max time above 200 : 70sec max.

. GENERAL SPECIFICATION :

- a . Temp. rise : 40 typ.
- b . Rated current :
Base on temp. rise & L / L0A=35% typ.
- c . Storage temp. : -40 ----+125
- d . Operating temp. : -40 ----+105
- e . Resistance to solder heat : 260 .10 secs.

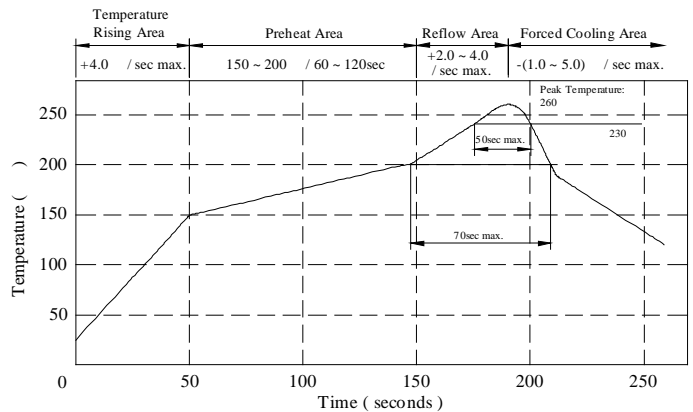

AE-001A

SPECIFICATION FOR APPROVAL

REF :

PAGE: 2


PROD. NAME	SHIELDED SMD POWER INDUCTOR	ABC'S DWG NO. ABC'S ITEM NO.	SU1030□□□□L□
---------------	--------------------------------	---------------------------------	--------------

ELECTRICAL CHARACTERISTICS :


DWG No.	Inductance (μ H)	Q ref.	SRF (MHz) typ.	RDC (m Ω)		I _{rms} (A) typ.	I _{sat} (A) typ.
				typ.	max.		
SU10303R5YL□	3.5 \pm 30%	16	45	20.5	27.0	5.00	5.20
SU10304R7YL□	4.7 \pm 30%	14	36	25.0	32.5	4.20	4.40
SU10306R2YL□	6.2 \pm 30%	12	30	32.0	42.0	3.80	3.90
SU1030100YL□	10.0 \pm 30%	16	26	44.0	58.0	3.00	3.10
SU1030150YL□	15.0 \pm 30%	16	22	73.0	95.0	2.60	2.55
SU1030220YL□	22.0 \pm 30%	16	18	110.0	145.0	2.00	2.10
SU1030330YL□	33.0 \pm 30%	12	14	150.0	195.0	1.70	1.74
SU1030470YL□	47.0 \pm 30%	14	12	210.0	270.0	1.40	1.35
SU1030680YL□	68.0 \pm 30%	14	10	285.0	370.0	1.20	1.22
SU1030101YL□	100.0 \pm 30%	14	8.5	395.0	520.0	1.10	1.02
SU1030151YL□	150.0 \pm 30%	12	5.5	640.0	840.0	0.85	0.84

- 1) . □ : Packaging Information... **A** : Bulk **B** : Taping Reel
- 2) . Inductance Test Freq. : 100KHz / 0.1V
- 3) . Q Test Freq. : 3R5~6R2--7.96MHz , 100~680--2.52MHz , 101~151--0.796MHz
- 4) . I_{sat} base on L / LOA=35% typ.
- 5) . I_{rms} base on Temp. rise 40 typ.

@ Inductance VS. DC Superposition Characteristics

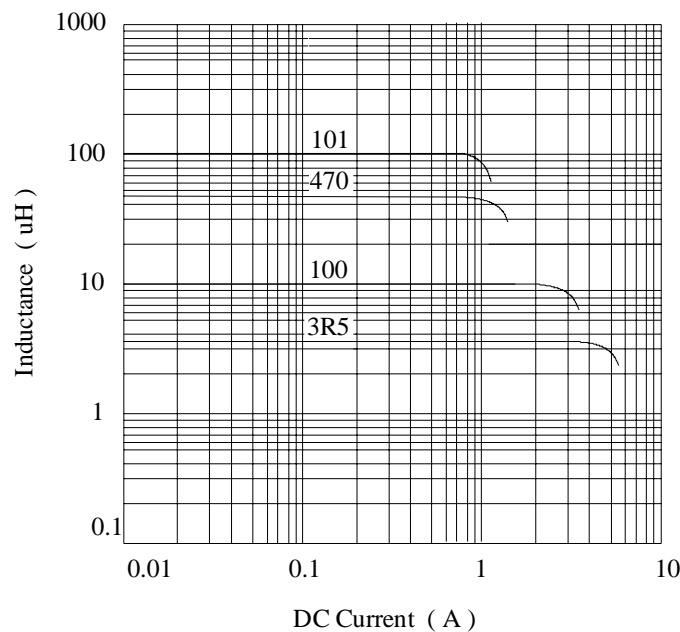

AE-001A



SPECIFICATION FOR APPROVAL


REF :

PAGE: 3


PROD. NAME	SHIELDED SMD POWER INDUCTOR	ABC'S DWG NO.	SU1030□□□□L□
		ABC'S ITEM NO.	

. PACKAGING INFORMATION :

(1) Configuration

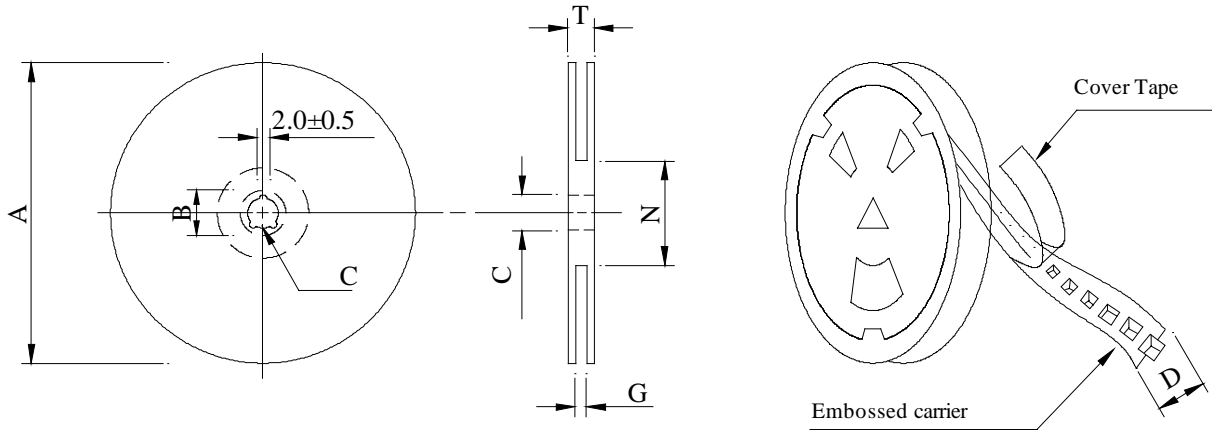

Carrier tape width : D

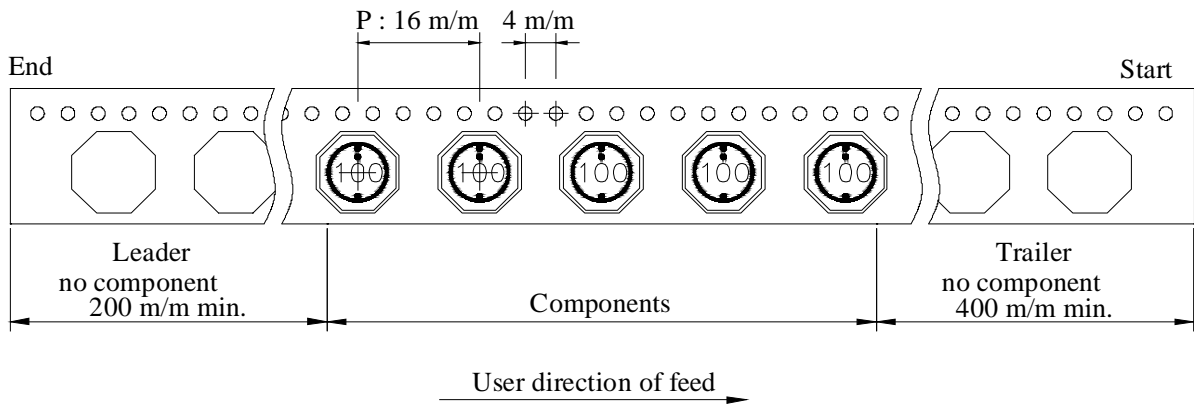

(2) Dimensions

Unit:m/m

Style	A	B	C	D	G	N	T
13 - 24	330	21±0.8	13±0.5	24	26 ⁺⁰	50 ⁻⁰	30.4

(3) Q'TY & G.W. Per package

Series	Inner : Reel			Outer : Carton		
	Q'TY (pcs)	G.W. (gw)	Style	Q'TY (pcs)	G.W. (Kg)	Size (cm)
SU1030	1200	1,800	13 - 24	4,800	10	40 x 40 x 24

AE-001A


SPECIFICATION FOR APPROVAL

REF :

PAGE: 4

PROD. NAME	SHIELDED SMD POWER INDUCTOR	ABC'S DWG NO.	SU1030□□□□L□
		ABC'S ITEM NO.	

. DWG EXPRESSION :

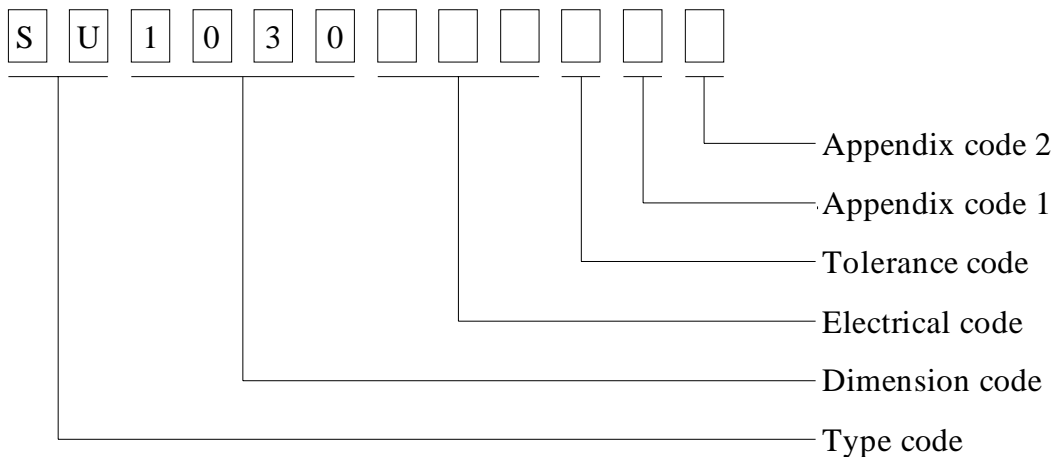

- Appendix code 1 : S : Standard products
 A K , M R , T Z : Special products
 L : Standard Lead Free products
 1 ~ 9 : Special Lead Free products

Appendix code 2 :

Code	Inner package	Inner package Q'TY	Remark
A	Empty	Empty	
B	T / R (Reel package)	1200 pcs	

AE-001A



SPECIFICATION FOR APPROVAL

REF :

PAGE: 5

PROD. NAME	SHIELDED SMD POWER INDUCTOR	ABC'S DWG NO. ABC'S ITEM NO.	SU1030□□□□L□
---------------	--------------------------------	---------------------------------	--------------

. RELIABILITY TEST :

Test item	Specification	Test condition															
Solderability	More than 90% of the terminal electrode shall be covered With fresh solder.	Preheat : 150±25 for 60 seconds Solder : Sn96.5 / Ag3 / Cu0.5 or equivalent Solder temp. : 235±5 Flux : Rosin Dip time : 4±1 seconds															
Thermal shock test (Temp. cycle)	Inductance shall not change more than ±30%	<table style="width: 100%; border: none;"> <tr> <td style="border: none;">Room temp.</td> <td style="border: none; text-align: center;">—————></td> <td style="border: none; text-align: center;">-25±2</td> </tr> <tr> <td style="border: none;">15 minutes</td> <td style="border: none;"></td> <td style="border: none; text-align: center;">30 minutes</td> </tr> <tr> <td colspan="3" style="border: none;"> </td> </tr> <tr> <td style="border: none;">Room temp.</td> <td style="border: none; text-align: center;">—————></td> <td style="border: none; text-align: center;">85±2</td> </tr> <tr> <td style="border: none;">15 minutes</td> <td style="border: none;"></td> <td style="border: none; text-align: center;">30 minutes</td> </tr> </table> <p>Total : 50 cycles</p>	Room temp.	—————>	-25±2	15 minutes		30 minutes				Room temp.	—————>	85±2	15 minutes		30 minutes
Room temp.	—————>	-25±2															
15 minutes		30 minutes															
Room temp.	—————>	85±2															
15 minutes		30 minutes															
Humidity Resistance test		Temperature : 40±2 Humidity : 90 ~ 95% Applied current : Per spec. Time : 500 hours															
High temp. Resistance test		Temperature : 105±2 Applied current : Per spec. Time : 500 hours															

AE-001A



SPECIFICATION FOR APPROVAL

REF :

PAGE: 6

PROD. NAME	SHIELDED SMD POWER INDUCTOR	ABC'S DWG NO.	SU1030□□□□L□
		ABC'S ITEM NO.	

UL CARD :

OBMW2 September 8, 2000
Magnet Wire-Component

JUNG SHING WIRE CO LTD E174837
 231 CHUNG CHENG RD, SEC 3 JEN-TEH HSIANG, TAINAN
 HSIEN TAIWAN

Mtl Dsg	Mark Dsg	BC	Coat Typ	OC	ANSI Type	Temp Class
AIW	---	Polyamideimide	---	---	MW81-C	220
CFUEWB	---	Polyurethane	---	---	MW75C	130
EIAIW	---	Polyesterimide	---	Polyamideimide	MW35C	200
EILOCKY	---	Polyesterimide	---	Polyamide	---	180
EILOCKW	---	Polyesterimide	---	Modified Epoxy	---	200
EIW	---	Polyesterimide	---	---	---	220
EIW-2	---	Polyesterimide	---	---	MW74-C	200
FL.EILOCKY	---	Modified Polyester	---	Polyamide	---	155
LSFFW	---	Polyurethane	---	---	MW79-C	155
LSUEW	---	Polyurethane	---	---	---	130
PEW	---	Polyester	---	---	---	155
PEY	---	Polyester	---	Nylon	MW24-C	155
SF.FLW	---	Modified Polyester	---	---	MW26C	155
SF.EIW	---	Polyesterimide	---	---	MW77C	180
SF.BY@	---	Modified Polyester	---	Nylon	MW27-C	155
SF.FLY@	---	Modified Polyester	---	Nylon	MW27-C	155
SF.BLOCKBS	---	Modified Polyester	---	Modified Polyamide	---	155
SF.EILOCKY#	---	Polyesterimide	---	Polyamide	---	180
SF.EILOCKBS	---	Polyesterimide	---	Modified Polyamide	---	180
SF.BW@	---	Modified Polyester	---	---	MW26C	155
SFFW	---	Polyurethane	---	---	MW79	155

A not-for-profit organization dedicated to public safety and committed to quality service

287806002 Page 1 of 2

Mtl Dsg	Mark Dsg	BC	Coat Typ	OC	ANSI Type	Temp Class
SFFY	---	Polyurethane	---	Polyamide	MW80C	155
UEW-1	---	Polyurethane	---	---	MW2-C	105
UEW-2	---	Polyurethane	---	---	---	130
UEW-4	---	Polyurethane	---	---	MW75C	130
UEY	---	Polyurethane	---	Nylon	MW28-C	130
UEY-2	---	Polyurethane	---	Polyamide	MW28-C	130

@ -May be suffixed by LZ; # - May be suffixed by LZ, EL or LZI.
 LZ - Signifies magened wires twisted together; EL - signifies base coated magnet wire laid parallel with top coat applied overall; LZL - signifies base coated magnet wire twisted together and covered with top coat overall.
 Marking: Company name or trademarks JSW or 歌如電線, material designation or marked designation on packaed or reel, and Recognized Component Mark.

See General Information Preceding These Recognitions
 For use only in equipment where the acceptability of the combination is determined by Underwriters Laboratories Inc.

287806002 Page 2 of 2 OBMW2/E174837
September 8, 2000

AE-001A

