


# SPECIFICATION FOR APPROVAL

REF : 20070425-A


PAGE: 1

PROD. NAME	SHIELDED SMD POWER INDUCTOR	ABC'S DWG NO.	SU8028□□□□F□-□□□
		ABC'S ITEM NO.	


**CONFIGURATION & DIMENSIONS :**

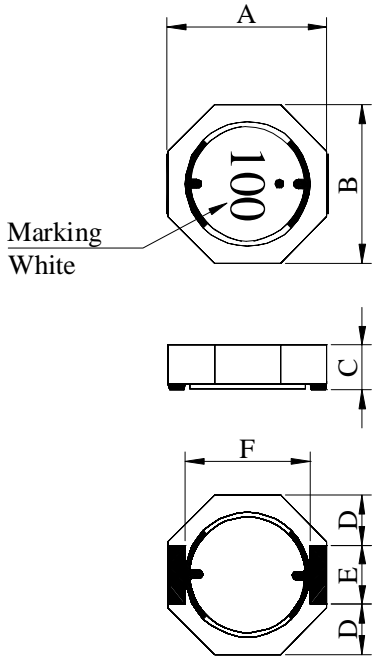


- A : 8.00 ±0.3 m/m
- B : 8.00 ±0.3 m/m
- C : 2.80 ±0.3 m/m
- D : 2.50 typ. m/m
- E : 2.80 typ. m/m
- F : 6.00 typ. m/m
- G : 3.20 ref. m/m
- H : 5.80 ref. m/m
- I : 2.00 ref. m/m



( PCB Pattern Suggestion )




**SCHEMATIC DIAGRAM :**




**MATERIALS :**

- a . Core : Ferrite DR core
- b . Core : Ferrite RI core
- c . Wire : Enamelled copper wire ( Class F )
- d . Adhesive : Epoxy resin
- e . Terminal : Ag/Ni/Sn
- f . Remark : Products comply with RoHS' requirements

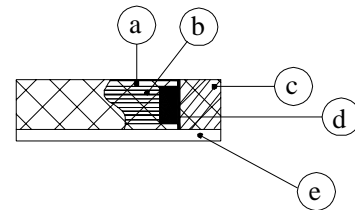

Peak Temp : 260 max.  
 Max time above 230 : 50sec max.  
 Max time above 200 : 70sec max.

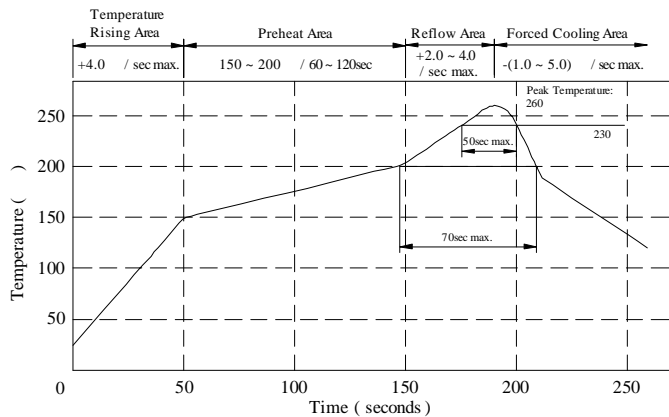

**GENERAL SPECIFICATION :**

- a . Temp. rise : 40 typ.
- b . Storage temp. : -40 ----+125
- c . Operating temp. : -40 ----+105
- d . Resistance to solder heat : 260 .10 secs.

AR-001A

# SPECIFICATION FOR APPROVAL

REF : 20070425-A

PAGE: 2


PROD. NAME	SHIELDED SMD POWER INDUCTOR	ABC'S DWG NO.	SU8028□□□□F□-□□□
		ABC'S ITEM NO.	

**ELECTRICAL CHARACTERISTICS :**


DWG No.	Inductance ( $\mu$ H)	Q ref.	Test Freq.		SRF (MHz) typ.	RDC (m $\Omega$ )		Irms (A)	Isat (A)
			L(KHz)	Q(MHz)		typ.	max.		
SU80282R5YF□-□□□	2.5 $\pm$ 30%	15	100	7.96	65.0	13.6	18.0	4.50	4.20
SU80283R3YF□-□□□	3.3 $\pm$ 30%	12	100	7.96	60.0	17.5	23.0	3.60	3.50
SU80284R7YF□-□□□	4.7 $\pm$ 30%	15	100	7.96	50.0	20.0	26.0	3.70	3.20
SU80286R8YF□-□□□	6.8 $\pm$ 30%	13	100	7.96	40.0	34.0	45.0	2.80	2.50
SU8028100YF□-□□□	10.0 $\pm$ 30%	22	100	2.52	35.0	45.0	57.0	2.60	2.20
SU8028150YF□-□□□	15.0 $\pm$ 30%	20	100	2.52	25.0	66.0	85.0	2.00	1.70
SU8028220YF□-□□□	22.0 $\pm$ 30%	22	100	2.52	20.0	106.0	130.0	1.60	1.50
SU8028330YF□-□□□	33.0 $\pm$ 30%	20	100	2.52	15.0	147.0	185.0	1.30	1.10
SU8028470YF□-□□□	47.0 $\pm$ 30%	14	100	2.52	12.0	177.0	230.0	1.20	1.00
SU8028680YF□-□□□	68.0 $\pm$ 30%	23	100	2.52	9.0	317.0	390.0	0.85	0.80
SU8028101YF□-□□□	100.0 $\pm$ 30%	20	100	0.796	8.0	390.0	500.0	0.75	0.70

- 1) . □ : Packaging Information... [A] : Bulk [B] : Taping Reel
- 2) . "- □□□":Reference code
- 3) . Inductance Test Freq. : 100KHz / 1V
- 4) . Isat base on L / L0A=35% typ.
- 5) . Irms base on Temp. rise 40 typ.

**@ Inductance VS. DC Current Curve**

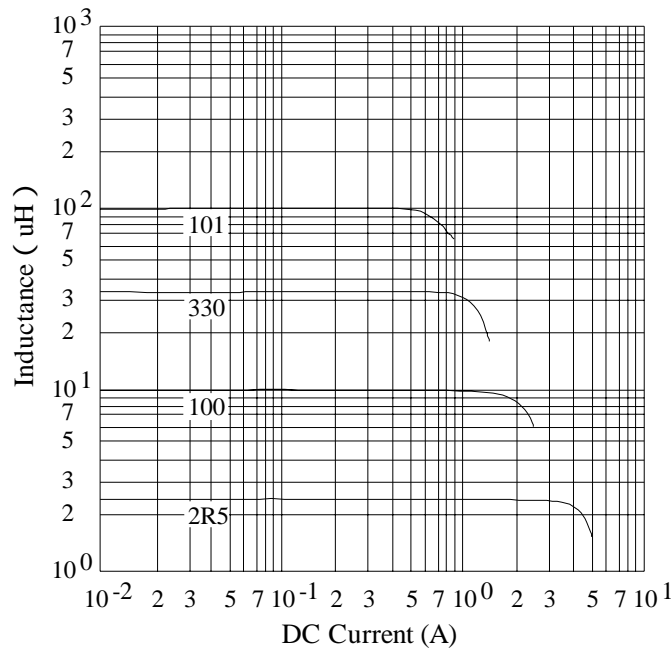

AR-001A



# SPECIFICATION FOR APPROVAL



REF : 20070425-A

PAGE: 3

PROD. NAME	SHIELDED SMD POWER INDUCTOR	ABC'S DWG NO.	SU8028□□□□F□-□□□
		ABC'S ITEM NO.	

**PACKAGING INFORMATION :**

( 1 ) Configuration

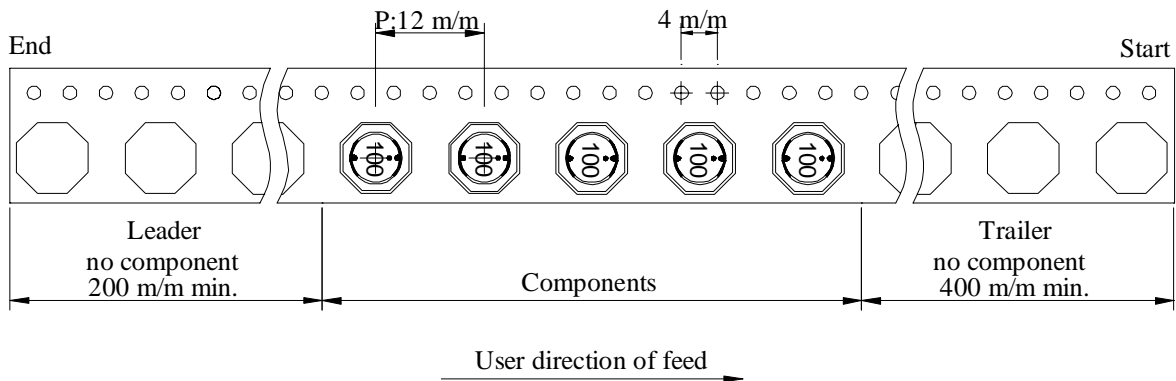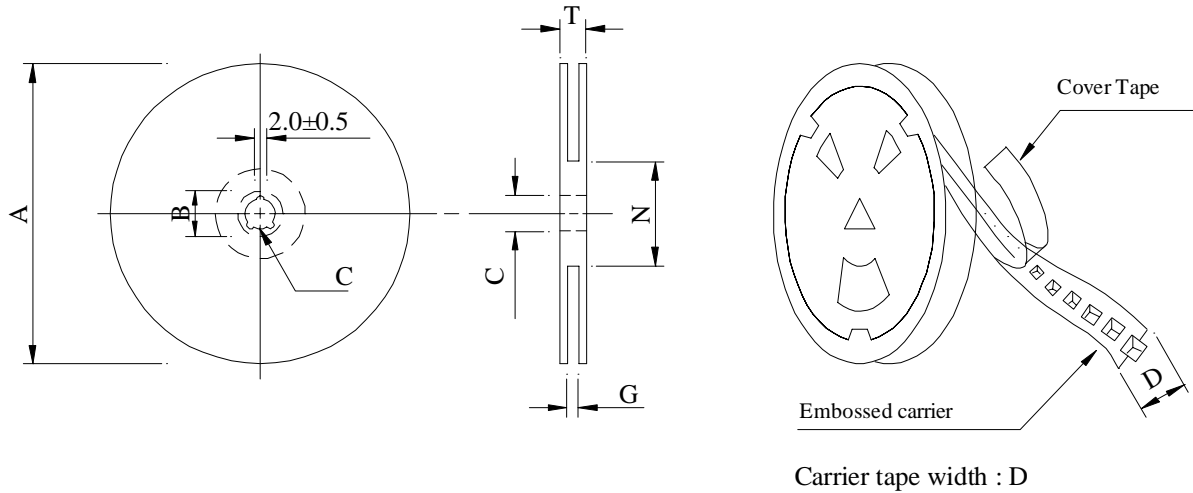

( 2 ) Dimensions

Unit:m/m

Style	A	B	C	D	G	N	T
13 - 16	330	21±0.8	13±0.5	16	18 <sup>+0</sup>	50 <sup>-0</sup>	22.4

( 3 ) Q'TY & G.W. Per package

Series	Inner : Reel			Outer : Carton		
	Q'TY (pcs)	G.W. (gw)	Style	Q'TY (pcs)	G.W. (Kg)	Size (cm)
SU8028	1,500	1,800	13 - 16	9,000	14.5	40 x 40 x 24

AR-001A


# SPECIFICATION FOR APPROVAL

REF : 20070425-A

PAGE: 4

PROD. NAME	SHIELDED SMD POWER INDUCTOR	ABC'S DWG NO.	SU8028□□□□F□-□□□
		ABC'S ITEM NO.	

. DWGING NUMBER EXPRESSION :

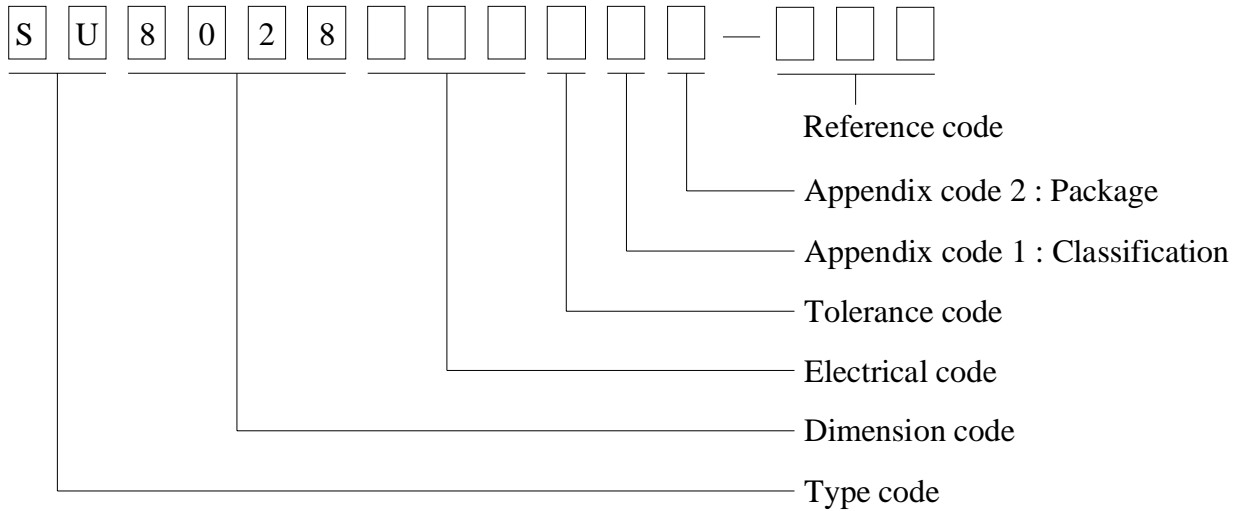

Appendix code 1 : Product Classification

- L : Lead Free Standard products comply with RoHS' requirements
- 1 ~ 9 : Lead Free Special products comply with RoHS' requirements

Appendix code 2 : Package Information

Code	Inner package	Inner package Q'TY	Remark
A	T.B.D.	T.B.D.	
B	T / R ( Reel package )	1,500 pcs	

# SPECIFICATION FOR APPROVAL

REF : 20070425-A


PAGE: 5

PROD. NAME	SHIELDED SMD POWER INDUCTOR	ABC'S DWG NO.	SU8028□□□□F□-□□□
		ABC'S ITEM NO.	

**. RELIABILITY TEST :**

Test item	Specification	Test condition										
Solderability	More than 90% of the terminal electrode shall be covered With fresh solder.	Preheat : 150±25 for 60 seconds Solder : Sn96.5 / Ag3 / Cu0.5 or equivalent Solder temp. : 235±5 Flux : Rosin Dip time : 4±1 seconds										
Thermal shock test ( Temp. cycle )	Inductance shall not change more than ±30%	<table style="width: 100%; border: none;"> <tr> <td style="border: none;">Room temp. 15 minutes</td> <td style="border: none; text-align: center;">→</td> <td style="border: none; text-align: center;"> <table style="border: none;"> <tr> <td style="border: none;">-25±2</td> <td style="border: none;">30 minutes</td> </tr> </table> </td> </tr> <tr> <td style="border: none;">Room temp. 15 minutes</td> <td style="border: none; text-align: center;">→</td> <td style="border: none; text-align: center;"> <table style="border: none;"> <tr> <td style="border: none;">85±2</td> <td style="border: none;">30 minutes</td> </tr> </table> </td> </tr> </table> <p>Total : 50 cycles</p>	Room temp. 15 minutes	→	<table style="border: none;"> <tr> <td style="border: none;">-25±2</td> <td style="border: none;">30 minutes</td> </tr> </table>	-25±2	30 minutes	Room temp. 15 minutes	→	<table style="border: none;"> <tr> <td style="border: none;">85±2</td> <td style="border: none;">30 minutes</td> </tr> </table>	85±2	30 minutes
Room temp. 15 minutes	→	<table style="border: none;"> <tr> <td style="border: none;">-25±2</td> <td style="border: none;">30 minutes</td> </tr> </table>	-25±2	30 minutes								
-25±2	30 minutes											
Room temp. 15 minutes	→	<table style="border: none;"> <tr> <td style="border: none;">85±2</td> <td style="border: none;">30 minutes</td> </tr> </table>	85±2	30 minutes								
85±2	30 minutes											
Humidity Resistance test		Temperature : 40±2 Humidity : 90 ~ 95% Applied current : Per spec. Time : 500 hours										
High temp. Resistance test		Temperature : 105±2 Applied current : Per spec. Time : 500 hours										

AR-001A



# SPECIFICATION FOR APPROVAL

REF : 20070425-A

PAGE: 6

PROD. NAME	<b>SHIELDED SMD POWER INDUCTOR</b>	ABC'S DWG NO.  ABC'S ITEM NO.	SU8028□□□□F□-□□□
---------------	--	-------------------------------------	------------------

. UL CARD :

OBMW2 September 8, 2000

Magnet Wire-Component

**JUNG SHING WIRE CO LTD** E174837

231 CHUNG CHENG RD, SEC 3 JEN-TEH HSIANG, TAINAN  
HSIEN TAIWAN

Mtl Dsg	Mark Dsg	BC	Coat Typ	OC	ANSI Type	Temp Class
AIW	---	Polyamideimide	---	---	MW81-C	220
CFUEWB	---	Polyurethane	---	---	MW75C	130
EIAIW	---	Polyesterimide	Polyamideimide	---	MW35C	200
EILOCKY	---	Polyesterimide	Polyamide	---	---	180
EILOCKW	---	Polyesterimide	Modified Epoxy	---	---	200
EIW	---	Polyesterimide	---	---	---	220
EIW-2	---	Polyesterimide	---	---	MW74-C	200
FL.EILOCKY	---	Modified Polyester	Polyamide	---	---	155
LSFFW	---	Polyurethane	---	---	MW79-C	155
LSUEW	---	Polyurethane	---	---	---	130
PEW	---	Polyester	---	---	---	155
PEY	---	Polyester	Nylon	---	MW24-C	155
SF.FLW	---	Modified Polyester	---	---	MW26C	155
SF.EIW	---	<b>Polyesterimide</b>	---	---	MW77C	180
SF.BY@	---	Modified Polyester	Nylon	---	MW27-C	155
SF.FLY@	---	Modified Polyester	Nylon	---	MW27-C	155
SF.BLOCKBS	---	Modified Polyester	Modified Polyamide	---	---	155
SF.EILOCKY#	---	Polyesterimide	Polyamide	---	---	180
SF.EILOCKBS	---	Polyesterimide	Modified Polyamide	---	---	180
SF.BW@	---	Modified Polyester	---	---	MW26C	155
SFFW	---	Polyurethane	---	---	MW79	155

287806002 Page 1 of 2

A not-for-profit organization  
dedicated to public safety and  
committed to quality service

Mtl Dsg	Mark Dsg	BC	Coat Typ	OC	ANSI Type	Temp Class
SFFY	---	Polyurethane	Polyamide	---	MW80C	155
UEW-1	---	Polyurethane	---	---	MW2-C	105
UEW-2	---	Polyurethane	---	---	---	130
UEW-4	---	Polyurethane	---	---	MW75C	130
UEY	---	Polyurethane	Nylon	---	MW28-C	130
UEY-2	---	Polyurethane	Polyamide	---	MW28-C	130

@ - May be suffixed by LZ; # - May be suffixed by LZ, EL or LZL.  
LZ - Signifies magned wires twisted together; EL - signifies base coated magnet wire laid parallel with top coat applied overall; LZL - signi-  
fies base coated magnet wire twisted together and covered with top coat overall.

Marking: Company name or trademarks **JSW** or 榮星電線, material designation or marked designation on packaed or reel, and  
Recognized Component Mark.

See General Information Preceding These Recognitions  
For use only in equipment where the acceptability of the combination is determined by Underwriters Laboratories Inc.

287806002 Page 2 of 2

OBMW2E174837  
September 8, 2000

AR-001A

