


## 40A冷压针孔 / 40A Crimp Contacts

镀银 Silver Plated



Inserts	Product Model	Order No.	Inserts	Product Model	Order No.
Male	CSM40-1.5	1 007 06 0000035	Female	CSF40-1.5	1 007 07 0000035
	CSM40-2.5	1 007 06 0000036		CSF40-2.5	1 007 07 0000036
	CSM40-4.0	1 007 06 0000037		CSF40-4.0	1 007 07 0000037
	CSM40-6.0	1 007 06 0000038		CSF40-6.0	1 007 07 0000038
	CSM40-10.0	1 007 06 0000039		CSF40-10.0	1 007 07 0000039

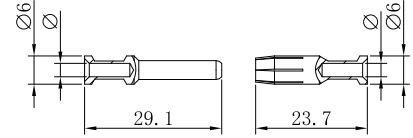

Wire gauge		Φ	Stripping length
1.5 mm <sup>2</sup>	AWG 16	1.75 mm	9 mm
2.5 mm <sup>2</sup>	AWG 14	2.25 mm	9 mm
4 mm <sup>2</sup>	AWG 12	2.85 mm	9.6 mm
6 mm <sup>2</sup>	AWG 10	3.5 mm	9.6 mm
10 mm <sup>2</sup>	AWG 8	4.3 mm	15 mm


剥线长度A=15 mm 用于电缆≥5 mm  
 剥线长度A=18 mm 用于电缆≥6.4 mm  
 Stripping length A=15 mm for cables≥5 mm  
 Stripping length A=18 mm for cables≥6.4 mm

## 70A冷压针孔 / 70A Crimp Contacts

镀银 Silver Plated



Inserts	Product Model	Order No.	Inserts	Product Model	Order No.
Male	CSM70-6.0	1 007 06 0000045	Female	CSF70-6.0	1 007 07 0000045
	CSM70-10	1 007 06 0000046		CSF70-10	1 007 07 0000046
	CSM70-16	1 007 06 0000047		CSF70-16	1 007 07 0000047
	CSM70-25	1 007 06 0000048		CSF70-25	1 007 07 0000048

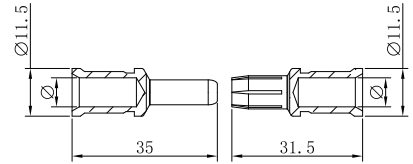

Wire gauge	Φ	Stripping length
10 mm <sup>2</sup>	4.3 mm	15.5 mm
16 mm <sup>2</sup>	5.5 mm	15.5 mm
25 mm <sup>2</sup>	7 mm	15.5 mm


电缆绞线依据 IEC 60 228-5  
 For stranded wire according to IEC 60 288 Class 5

## 100A冷压针孔 / 100A Crimp Contacts

镀银 Silver Plated



Inserts	Product Model	Order No.	Inserts	Product Model	Order No.
Male	CSM100-10	1 007 06 0000049	Female	CSF100-10	1 007 07 0000049
	CSM100-16	1 007 06 0000050		CSF100-16	1 007 07 0000050
	CSM100-25	1 007 06 0000051		CSF100-25	1 007 07 0000051
	CSM100-35	1 007 06 0000052		CSF100-35	1 007 07 0000052

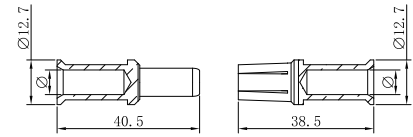

Wire gauge	Φ	Stripping length
10 mm <sup>2</sup>	4.3 mm	19 mm
16 mm <sup>2</sup>	5.5 mm	19 mm
25 mm <sup>2</sup>	7 mm	19 mm
35 mm <sup>2</sup>	8.2 mm	16 mm


电缆绞线依据 IEC 60 228-5  
 For stranded wire according to IEC 60 288 Class 5

## 200A冷压针孔 / 200A Crimp Contacts

镀银 Silver Plated



Inserts	Product Model	Order No.	Inserts	Product Model	Order No.
Male	CSM200-25	1 007 06 0000053	Female	CSF200-25	1 007 07 0000053
	CSM200-35	1 007 06 0000054		CSF200-35	1 007 07 0000054
	CSM200-50	1 007 06 0000055		CSF200-50	1 007 07 0000055
	CSM200-70	1 007 06 0000056		CSF200-70	1 007 07 0000056



Wire gauge	Φ	Stripping length
25 mm <sup>2</sup>	7 mm	22.5 mm
35 mm <sup>2</sup>	8.2 mm	22.5 mm
50 mm <sup>2</sup>	10 mm	22.5 mm
70 mm <sup>2</sup>	11.5 mm	22.5 mm

电缆绞线依据 IEC 60 228-5  
 For stranded wire according to IEC 60 288 Class 5