



SPECIFICATION FOR APPROVAL

REF :



PAGE: 1

PROD. NAME	SHIELDED SMD POWER INDUCTOR	ABC'S DWG NO.	SD1206□□□□1□-□□□
		ABC'S ITEM NO.	

I . MECHANICAL DIMENSIONS :

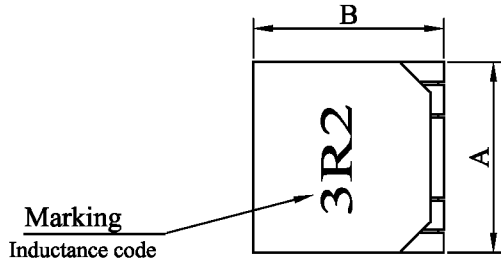


A :	12.50±0.30	m/m
B :	12.50±0.30	m/m
C :	5.70±0.30	m/m
D :	1.90±0.20	m/m
E :	2.50 nom.	m/m
E1:	2.00 ref.	m/m
E2:	2.00 ref.	m/m
F :	7.50±0.25	m/m
F1:	6.40 ref.	m/m
F2:	5.20 ref.	m/m
H :	10.50 ref.	m/m
I :	4.15 ref.	m/m
J :	3.00 ref.	m/m
K :	13.00 ref.	m/m
M :	4.70 ref.	m/m
N :	4.50 ref.	m/m
P :	7.50 ref.	m/m





(PCB Pattern)

Marking
Inductance code

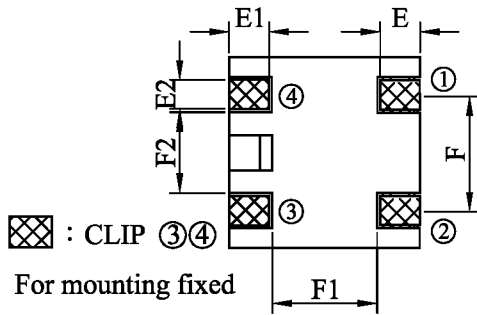

⊗ : CLIP ③④
For mounting fixed


II . SCHEMATIC DIAGRAM :

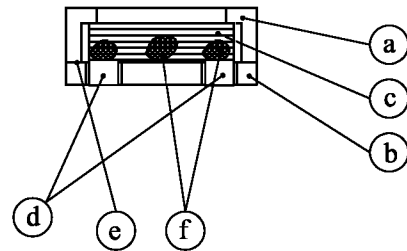

III . MATERIALS LIST :

- a . Core : Ferrite ER core
- b . Core : Ferrite SB core
- c . Wire : Ultra-fine rectangular
Enamelled copper wire
- d . Terminal : Cu/Sn
- e . Adhesive : Epoxy resin
- f . Adhesive : Epoxy resin
- g . Remark : Products comply with RoHS' requirements

Peak Temp : 260°C max.
Max time above 230°C : 50sec max.
Max time above 200°C : 70sec max.

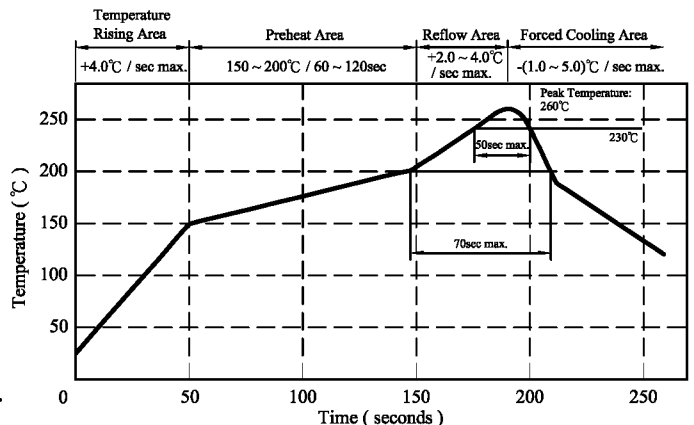

IV . GENERAL SPECIFICATION :

- a . Temp. rise : 40°C max.
- b . Storage temp. : -40°C ~ +125°C
- c . Operating temp. : -40°C ~ +105°C
- d . Resistance to solder heat : 260°C. 10 secs.

AR-001A

SPECIFICATION FOR APPROVAL

REF :

PAGE: 2


PROD. NAME	SHIELDED SMD POWER INDUCTOR	ABC'S DWG NO.	SD1206□□□□1□-□□□
		ABC'S ITEM NO.	

V . ELECTRICAL CHARACTERISTICS :

DWG No.	Initial inductance L0 (uH)	Inductance at flat point L1 (uH)	Flat point ref. (A)	Irms (A)	Isat (A)	DC Resistance max. (mΩ)
SD12062R5Y1□-□□□	2.70±25%	2.50±25%	5.0	13.0	12.0	6.0
SD12062R3Y1□-□□□	2.50±25%	2.30±25%	4.0	10.5	11.0	4.6
SD12063R2Y1□-□□□	3.60±25%	3.20±25%	3.0	10.0	8.5	6.0
SD12064R6Y1□-□□□	4.80±25%	4.60±25%	2.0	9.0	7.5	7.0

- 1). □ : Packaging Information... **[A]**: Bulk **[B]**: Taping Reel
- 2). "-□□□": Reference code
- 3). Measured Frequency of inductance is 100 KHz / 1V
- 4). Isat base on inductance drop 20% max. of L1 value
- 5). Irms base on temp. rise 40°C max.

@ Inductance VS. DC Superposition Characteristics

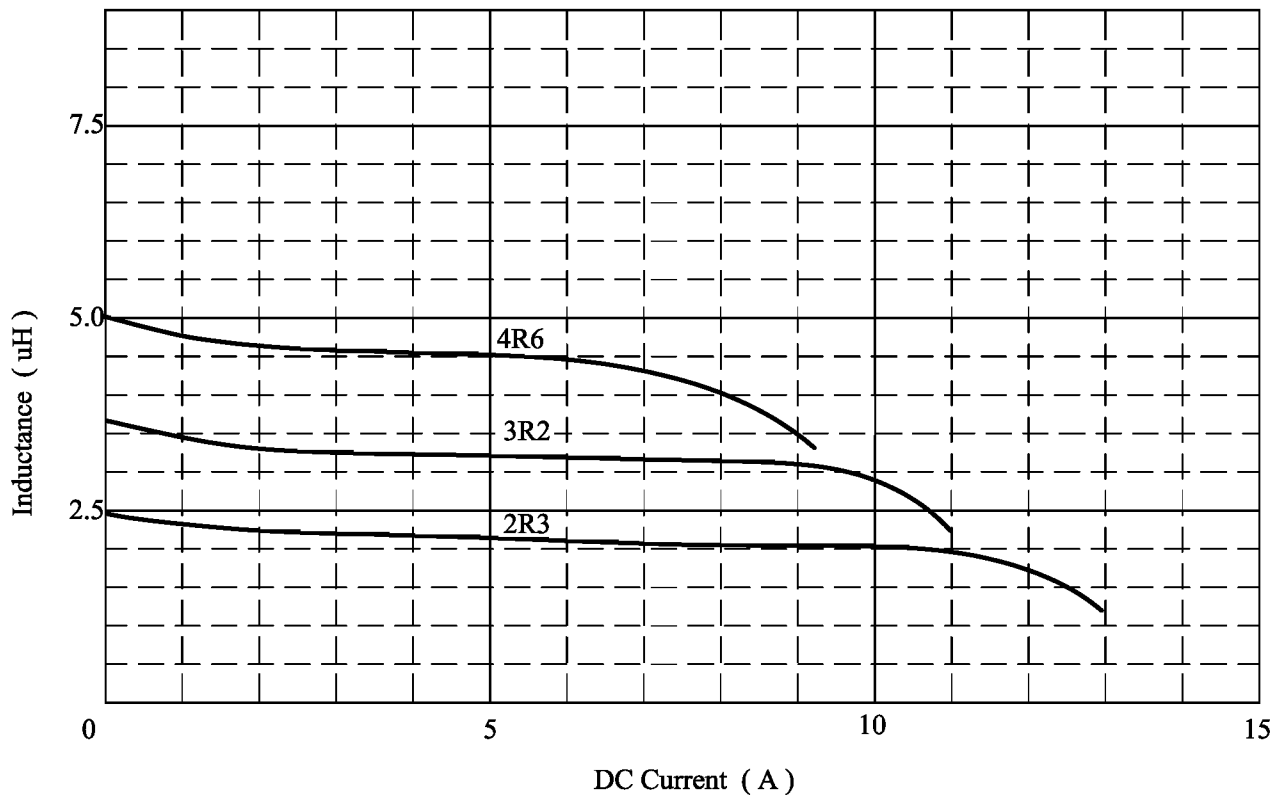

AR-001A

SPECIFICATION FOR APPROVAL


REF :

PAGE: 3


PROD. NAME	SHIELDED SMD POWER INDUCTOR	ABC'S DWG NO.	SD1206□□□□1□-□□□
		ABC'S ITEM NO.	

VI . PACKAGING INFORMATION :

(1) Configuration

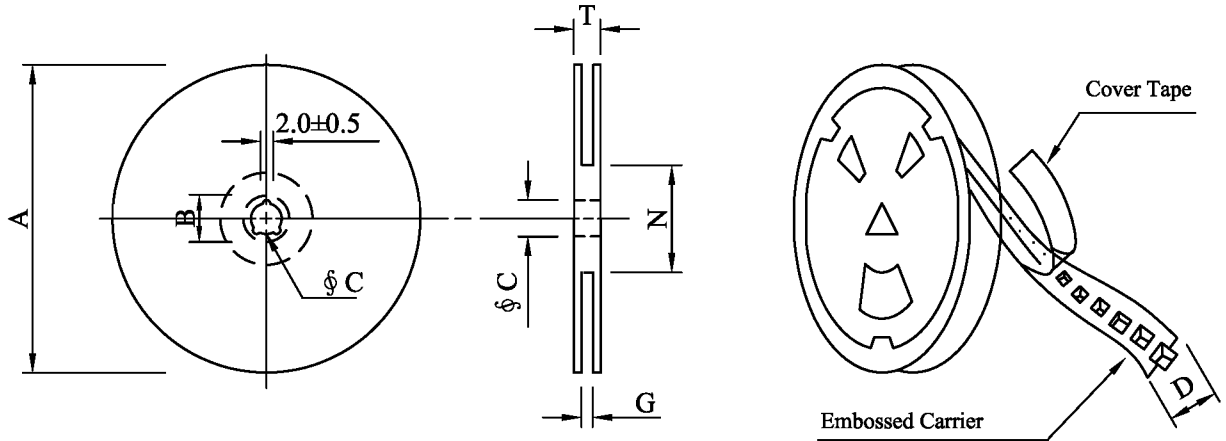

※Carrier Tape Width : D

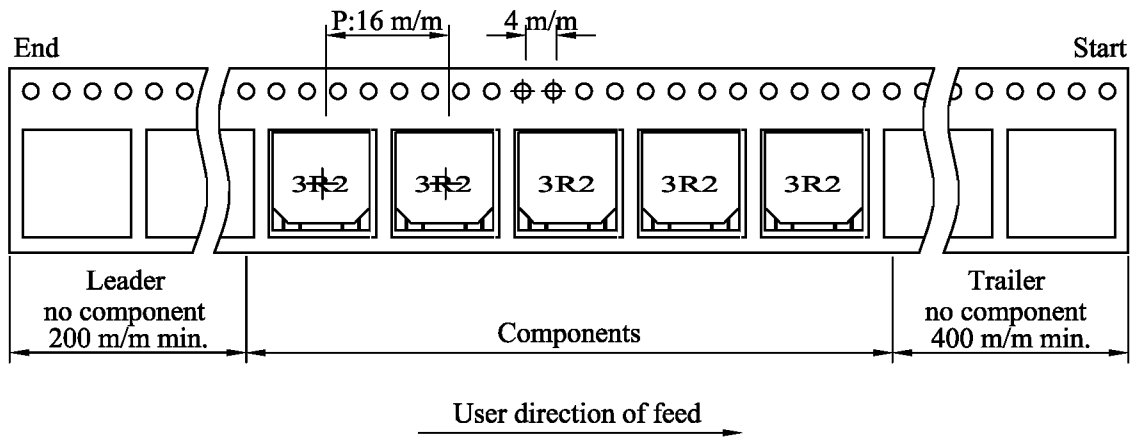

(2) Dimensions

Unit:m/m

Style	A	B	C	D	G	N	T
13 - 24	330	21±0.8	13	24	26 ⁺⁰	50 ⁻⁰	30.4

(3) Q'TY & G.W. Per package

Series	Inner : Reel			Outer : Carton		
	Q'TY (pcs)	G.W. (gw)	Style	Q'TY (pcs)	G.W. (Kg)	Size (cm)
SD1206	600	2,150	13 - 24	2,400	11.30	40 x 40 x 24

SPECIFICATION FOR APPROVAL

REF :

PAGE: 5

PROD. NAME	SHIELDED SMD POWER INDUCTOR	ABC'S DWG NO.	SD1206□□□□1□-□□□
		ABC'S ITEM NO.	

VIII . RELIABILITY TEST :

Test item	Specification	Test condition															
Solderability	More than 90% of the terminal electrode shall be covered With fresh solder.	Preheat : 150±25°C for 60 seconds Solder : Sn96.5 / Ag3 / Cu0.5 or equivalent Solder temp. : 235±5°C Flux : Rosin Dip time : 4±1 seconds															
Thermal shock test (Temp. cycle)	Inductance shall not change more than ±20%	<table style="width: 100%; border: none;"> <tr> <td style="text-align: center;">Room temp.</td> <td style="text-align: center;">—————></td> <td style="text-align: center;">-25±2 °C</td> </tr> <tr> <td style="text-align: center;">15 minutes</td> <td></td> <td style="text-align: center;">30 minutes</td> </tr> <tr><td colspan="3"> </td></tr> <tr> <td style="text-align: center;">Room temp.</td> <td style="text-align: center;">—————></td> <td style="text-align: center;">85±2 °C</td> </tr> <tr> <td style="text-align: center;">15 minutes</td> <td></td> <td style="text-align: center;">30 minutes</td> </tr> </table> <p>Total : 50 cycles</p>	Room temp.	—————>	-25±2 °C	15 minutes		30 minutes				Room temp.	—————>	85±2 °C	15 minutes		30 minutes
Room temp.		—————>	-25±2 °C														
15 minutes			30 minutes														
Room temp.	—————>	85±2 °C															
15 minutes		30 minutes															
Humidity Resistance test	Temperature : 40±2°C Humidity : 90 ~ 95% Applied current : Per spec. Time : 500 hours																
High temp. Resistance test	Temperature : 105±2°C Applied current : Per spec. Time : 500 hours																

SPECIFICATION FOR APPROVAL

REF :

PAGE: 6

PROD. NAME	SHIELDED SMD POWER INDUCTOR	ABC'S DWG NO.	SD1206□□□□1□-□□□
		ABC'S ITEM NO.	

IX . UL CARD :

OBMW2		January 7, 1988			
Component-Magnet Wire				E104048 (S)	
MITSUBISHI CABLE INDUSTRIES LTD					
4-3 IKEJIRI ITAMI , HYOGO 664 JAPAN					
Mtl		Coat Typ		ANSI	Temp
Dsg	BC	Oyercoat		Type	Class
EDW-R52	Medis	Ester-imide		—	155
Marking : Company name and type designation on package or reels.					
See General Information Preceding These Recognitions.					
For use only in equipment where the acceptability of the combination is determined by Underwriters Laboratories Inc.					
Report : January 5, 1988.					
302279005	H7642	Underwriters Laboratories Inc.®		D11/0149909	