




# DEGSON ELECTRONICS CO., LTD.

## Product Specification



**DG44A-1**

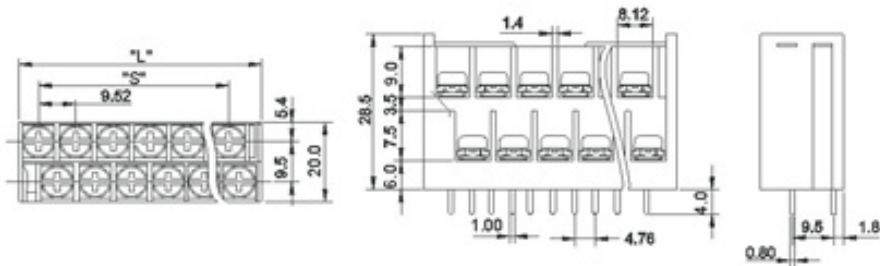


"S"=9.52x(P/2-1)

"L"=9.52x(P/2-1)+17.08

Poles	4	6	8	10	12	14	16	18	20	22	24	26	28	30
L(mm)	26.80	36.12	45.64	55.16	64.68	74.20	83.72	93.24	102.76	112.28	121.80	131.32	140.84	150.36
S(mm)	9.52	19.04	28.56	38.08	47.60	57.12	66.64	76.16	85.68	95.20	104.72	114.24	123.76	133.28
Poles	32	34	36	38	40	42	44	46	48					
L(mm)	159.68	169.40	178.92	188.44	197.96	207.48	217.00	226.52	236.04					
S(mm)	142.80	152.32	161.84	171.36	180.88	190.40	199.92	209.44	218.96					

<b>Approval</b>		
<b>Electrical</b>		
Standard	UL	IEC
Rated voltage	300V	450V
Rated current	15A	24A
Wire range	22-14AWG	2.5mm <sup>2</sup>
With standing voltage	AC2000V/1Min	
Insulation Resistance	500MΩ / DC500V	
<b>Mechanical</b>		
Max. Torque Value	0.8Nm 7.0Lb.in	
Ambient temperature	-40°C~+105°C	
<b>Dimensions</b>		
Pitch	9.52mm(.375")	
Poles	2*(2P-18P)	
<b>Material</b>		
Housing	PA66+23%GF, UL94V-0	
Terminal	Brass,0.8t Tin plated	
Screws	Steel,M3.5 Ni plated	

### HOW TO ORDER

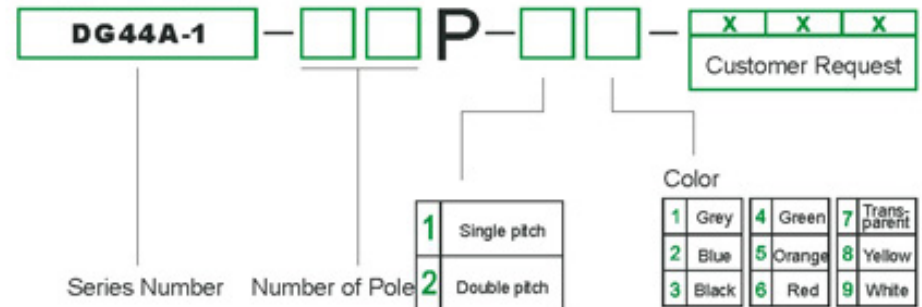

		<b>DEGSON ELECTRONICS CO., LTD.</b>
	NAME	<b>DG44A-1</b>